


HOOD TYPE DISHWASHER WITH SOFTENER

H602S-11

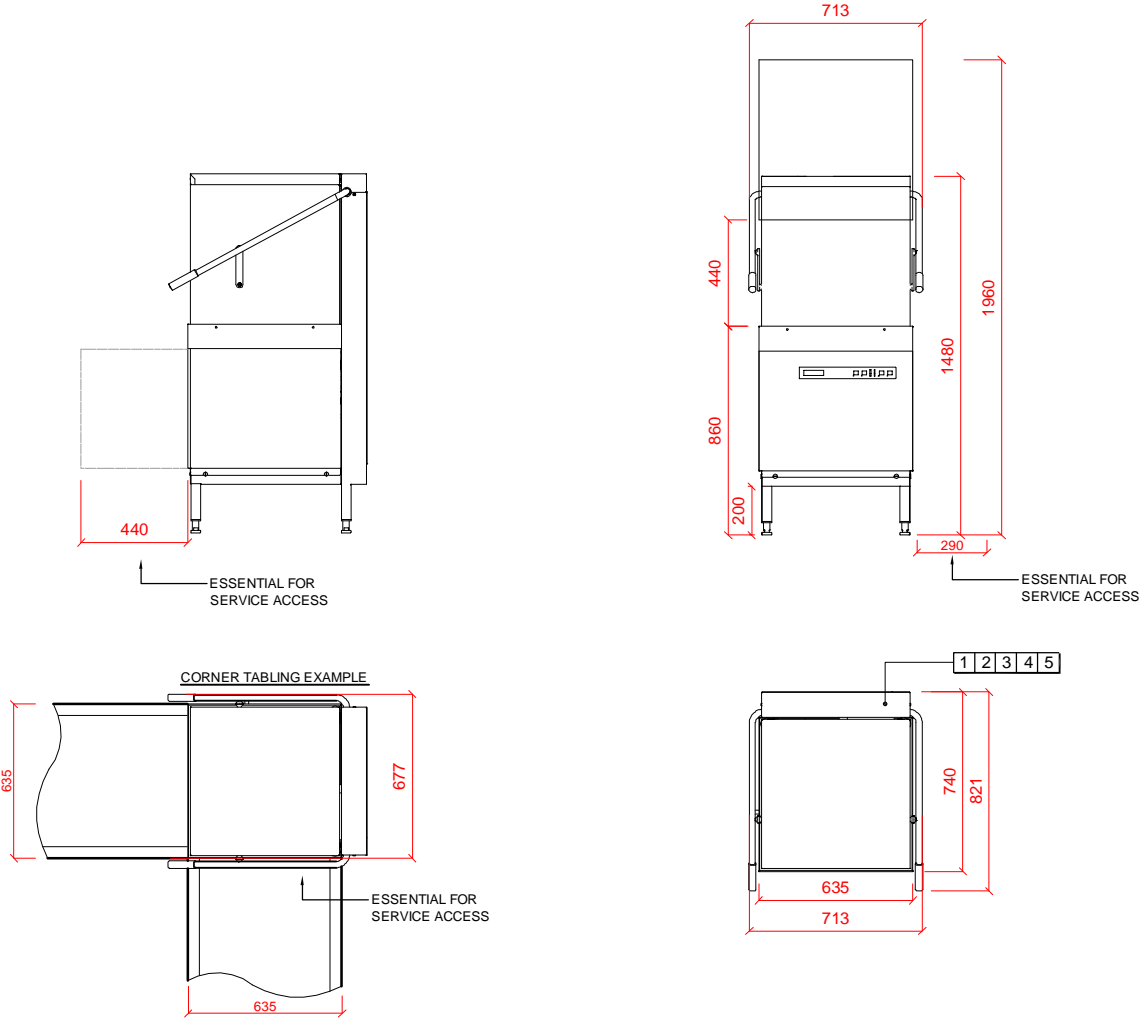

<p><b>1</b> Water</p> <p>22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY 60°C (2° TO 8° CLARK MAX) @ 0.8 TO 10 BAR MAX.</p> <p>INITIAL TANK FILL 21 LITRES.</p> <p>RINSE WATER USAGE 2.9 LITRES PER CYCLE.</p> <p>OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.</p>	<p><b>2</b> Drain</p> <p>DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 500mm A.F.F.L.</p> <p>FLOW RATE 30 LITRES PER MINUTE.</p> <p><b>4</b> <b>5</b> Other Services</p> <p>RINSE AGENT HOSE - 2.0 METRE FLEXIBLE.</p> <p>DETERGENT HOSE - 2.0 METRE FLEXIBLE.</p>	<p><b>3</b> Electric Loading</p> <p>6.0kW 400/50/3 FUSED AT 16AMPS CONFIGURABLE TO: 4.2kW 230/50/1 FUSED AT 25AMPS. 2.3kW 230/50/1 FUSED AT 13AMPS.</p> <p>MACHINE SUPPLIED WITH 2.5 METRES OF CABLE.</p> <p>Notes</p>
---	---	--