

Fume Filtration Units

Key Features

- Type: Electric
- Air re-circulation
- Three part filtration system
- Illumination
- Overheat/fire protection
- L3 suitable for use over electric units up to 9kW
- L4 suitable for use over electric units up to 14kW



13

Construction

- Body: stainless steel grade 430
- Filters: Aluminium mesh and carbon

Available Options


- Choice of widths

Available Accessories

- N/A

Specifications

Model	L3	L4
External height (mm)	545	545
External width (mm)	915	1295
External depth (mm)	610	610
Net weight unpacked (kg)	25	44
Volume of air filtered per hour (m ³)	460	690
Gross weight packed (kg)	31	50
Shipping volume (m ³)	0.497	0.657
Total electrical power rating (kW)	0.35	0.45
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	1.5	2.0

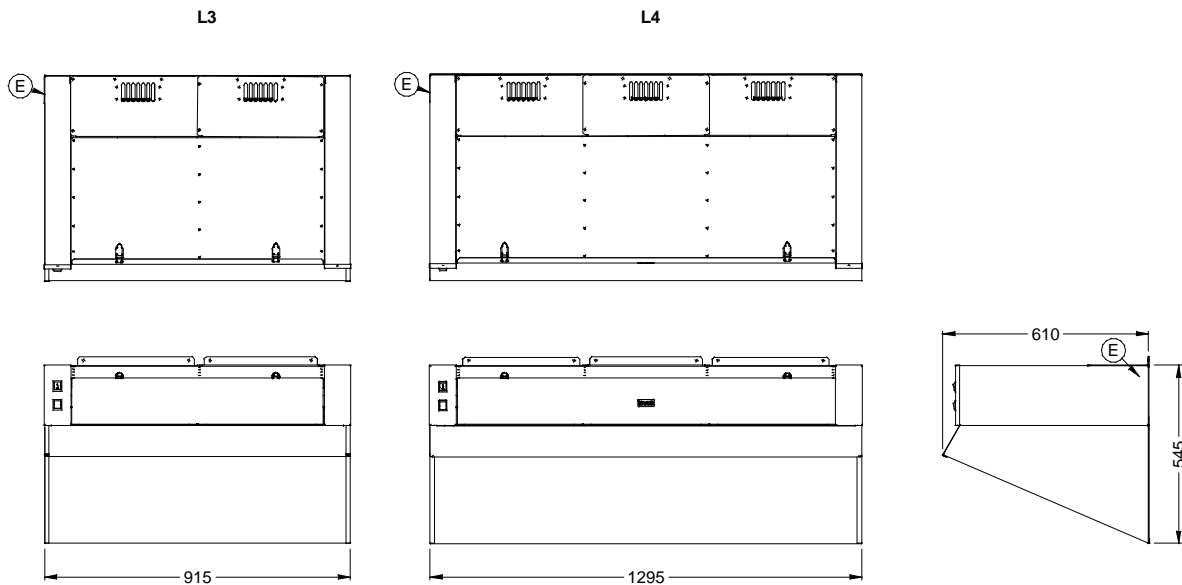

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
FUMEFILTRATION
Issue date: Oct-09