




EL 71

# FEATURES

- Low service costs
- Long life
- Available in all climate classes
- Accessories including baskets - see page 70

| EL |

**RELIABLE STORAGE**

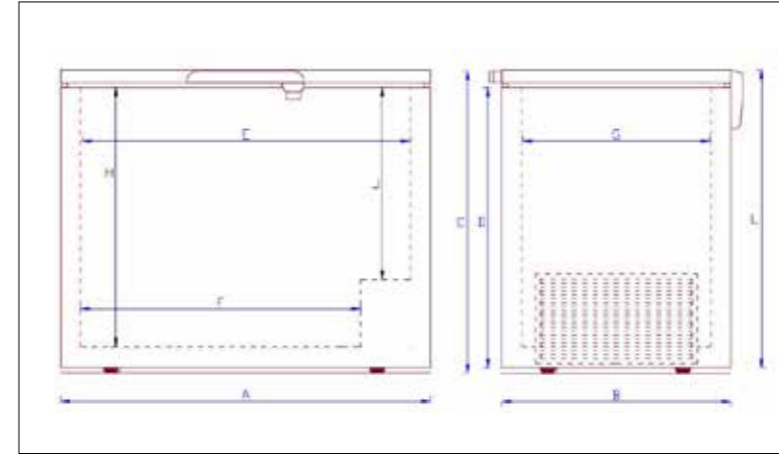

EL 12



EL 22



EL 35



EL 45



EL 53



EL 61

	EL 12	EL 22	EL 35	EL 45	EL 53	EL 61	EL 71
Ambient temperature (Celsius)	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +31
Gross volume, litres	110	215	347	447	527	607	701
Net volume, litres	98	205	331	427	504	580	670
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Refrigerant	R600 a	R134 a	R134 a	R134 a	R134 a	R134 a	R134 a
Input power (watt):	52	124	141	146	211	211	245
Energy consumption / 24 h (kwh) at 18 deg	0,49	0,71	0,9	1,05	1,3	1,52	1,95
<b>DIMENSIONS</b>							
External dimensions (wxdxh)	550*550*860	720x650x860	1050x650x860	1300x650x860	1500*650*860	1700*650*860	1800x690x860
Internal dimensions (wxdxh)	420x420x795	606x536x750	936x536x750	1186x536x750	1386x536x750	1586x536x750	1686x536x750
Dimension A	550	720	1050	1300	1500	1700	1800
Dimension B	550*	650	650	650	650	650	690
Dimension B incl. handle & hinges	-	730	730	730	730	730	730
Dimension C	860	860	860	860	860	860	860
Dimension D	770	780	780	780	780	780	780
Dimension E	420	606	936	1186	1386	1586	1686
Dimension F	220	406	736	986	1186	1386	1486
Dimension G	420	536	536	536	536	536	576
Dimension H	675	750	750	750	750	750	750
Dimension J	465	500	500	500	500	500	500
Dimension L	825	850	850	850	850	850	850
Insulation ,mm	65	60	60	60	60	60	60
<b>ACCESSORIES</b>							
Dividers	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Baskets included	1	1	2	2	3	3	3
Max. Number of basket possible	1	1	2	3	4	4	6
Castors	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Lock	n/a	Included	Included	Included	Included	Included	Included
<b>OTHER DATA</b>							
Outer cabinet	White	White	White	White	White	White	White
Inner cabinet		Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Type of cooling	Static	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual	Manual
Power	220V/50 hz	220V/50Hz	220V/50hz	220V/50hz	220V/50hz	220V/50hz	220V/50hz
Power 110volt / 60 hz	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Freezing capacity kg/ 24 h	6,5	15	22	27	36	38	43
Light in Lid	Included	Included	Included	Included	Included	Included	Included
Calendar in Lid	n/a	Included	Included	Included	Included	Included	Included
Net weight, kg	31	43	54	64	67	77	85
Gross weight, kg	34	46	58	68	71	82	89
<b>SHIPPING</b>							
20' cont. Capacity		42	30	24	20	18	14
40' cont. Capacity		90	64	50	46	40	30
40' HC cont. Capacity	228	126	88	70	61	52	42
Standard Trailer capacity	276	102	74	60	52	44	42

\*Handle for EL 12 is integrated in the lid.