




EL 71

FEATURES

- Low service costs
- Long life
- Available in all climate classes
- Accessories including baskets - see page 64

| EL |

RELIABLE STORAGE

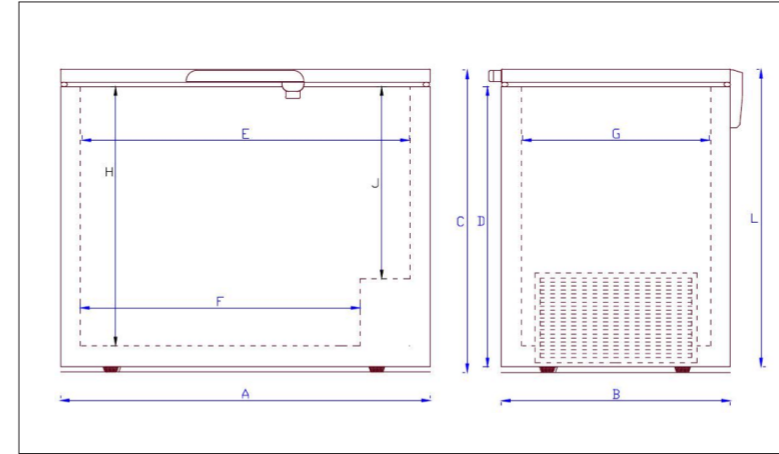

	EL 12	EL 22	EL 35	EL 45	EL 53	EL 61	EL 71
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +31
Gross volume, litres	110	215	347	447	527	607	701
Net volume, litres	98	205	331	427	504	580	670
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Refrigerant	R600 a	R134 a	R134 a	R134 a	R134 a	R134 a	R134 a
Energy consumption / 24 h (kwh) at 18 deg	0,49	0,71	0,9	1,05	1,3	1,52	1,95
Input power (watt):	52	124	141	146	211	211	245
DIMENSIONS							
External dimensions (wxdxh)	545x590x840	725x655x865	1055x655x865	1305x655x865	1505*655*865	1705*655*865	1805x695x865
Internal dimensions (w*d*h)	400x400x670	606*536*745	936*536*745	1186*536*745	1386*536*745	1586*536*745	1686*576*745
Dimension A	545	725	1055	1305	1505	1705	1805
Dimension B	590	655	655	655	655	655	655
Dimension C	840	8695	865	865	865	865	865
Dimension D	770	780	780	780	780	780	780
Dimension E	400	606	936	1186	1386	1586	1686
Dimension F	220	406	736	986	1186	1386	1486
Dimension G	400	536	536	536	536	536	576
Dimension H	670	745	745	745	745	745	745
Dimension J	465	495	495	495	495	495	495
Dimension L	825	850	850	850	850	850	850
Insulation ,mm	65	60	60	60	60	60	60
ACCESSORIES							
Dividers	n/a	Optional	Optional	Optional	Optional	Optional	
Baskets included	1	1	2	2	3	3	3
Max. Number of basket possible	1	1	2	3	4	4	6
Castors	n/a	Optional	Optional	Optional	Optional	Optional	optional
Castors w. brakes	n/a	Optional	Optional	Optional	Optional	Optional	optional
Lock	n/a	Included	Included	Included	Included	Included	Included
OTHER DATA							
Outer cabinet	white	White	White	White	White	White	White
Inner cabinet		Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Type of cooling	static	Static	Static	Static	Static	Static	Static
Type of defrost	manual	Manual	Manual	Manual	Manual	Manual	Manual
Power	220-240V/50hz	220-240V/50hz	220-240V/50hz	220-240V/50hz	220-240V/50hz	220-240V/50hz	220-240V/50hz
Power 110volt / 60 hz	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Thermostat	analog	Analog	Analog	Analog	Analog	Analog	Analog
Freezing capacity kg/ 24 h	6,5	15	22	27	36	38	43
Light in Lid	incl	Included	Included	Included	Included	Included	incl
Calendar in Lid	n/a	Included	Included	Included	Included	Included	incl
Net weight, kg	31	43	54	64	67	77	85
Gross weight, kg	34	46	58	68	71	82	89
SHIPPING							
20' cont. Capacity	112	42	30	24	20	18	14
40' cont. Capacity	228	90	64	50	46	40	30
40' HC cont. Capacity	228	126	88	70	61	52	42
Standard Trailer capacity	276	102	74	60	52	44	42



EL 12



EL 22



EL 35



EL 45



EL 53



EL 61

*Handle for EL 12 is integrated in the lid.