



Installation, Operating and Servicing Instructions

Electric Fume Filtration Units L3, L4

Please make a note of your product details for
future use:

Date Purchased: _____

Model Number: _____

Serial Number: _____

Dealer: _____

CONTENTS

Important Information	2
Warnings and Precautions	3
Technical Data	3
Checklist of Enclosures	3
Installation and Commissioning	3-5
Operating Instructions	5-6
Cleaning	6
Servicing, Maintenance and Component Replacement	6
Fault Finding	6
Spare Parts List	7
Service Information and Guarantee	8

IMPORTANT INFORMATION



Read these instructions carefully before using this product, paying particular attention to all sections that carry warning symbols, caution symbols and notices. Ensure that these are understood at all times.




WARNING!

This symbol is used whenever there is a risk of personal injury.



CAUTION!

This symbol is used whenever there is a risk of damaging your Lincat product.



NOTE:

This symbol is used to provide additional information, hints and tips.

KEEP THIS MANUAL FOR FUTURE REFERENCE

WARNINGS AND PRECAUTIONS



This appliance must be installed, commissioned and serviced by a qualified person in accordance with national and local regulations in force in the country of installation.

If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified person.

Ensure that the plug/socket is accessible at all times.

Strip plastic coating and clean the appliance before use.

During operation parts may become hot - avoid accidental contact.

Disconnect this appliance before servicing, maintenance or cleaning.

TECHNICAL DATA

Model	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
L3	560	920	620	30.0
L4	560	1310	620	40.0

CHECK LIST OF ENCLOSURES

Warranty card
Instructions manual
Aluminium filters (L3 x 2, L4 x 3)
Carbon filters (L3 x 2, L4 x 3)
Fixing kit

INSTALLATION AND COMMISSIONING

This appliance must be earthed.



An equipotential bonding terminal is provided to allow cross bonding with other equipment.

If replacing the plug connect the terminals as follows:

Green and Yellow wire	Earth	E
Blue wire	Neutral	N
Brown wire	Live	L

Supply cords shall be oil resistant, sheathed flexible cable not lighter than ordinary polychloroprene or equivalent elastomer sheathed cord (code 60245 IEC 57)

Unlatch the front flap and slide out the filters.

Ensure ample room ventilation with no cross draughts (7-10 air changes per hour).

Install the filtration appliance on a suitable wall, so that there is an air space above it and the lower edge of the canopy is 800mm above the cooking surface. The front edge should overlap the cooking area by 100mm.

Using the relevant dimensions from Fig 1, drill holes with a No.4 masonry drill and insert rawlplugs. Hang the appliance onto screws in the keyhole cut-outs and secure into place by screwing through the top row of holes. Replace the filters.

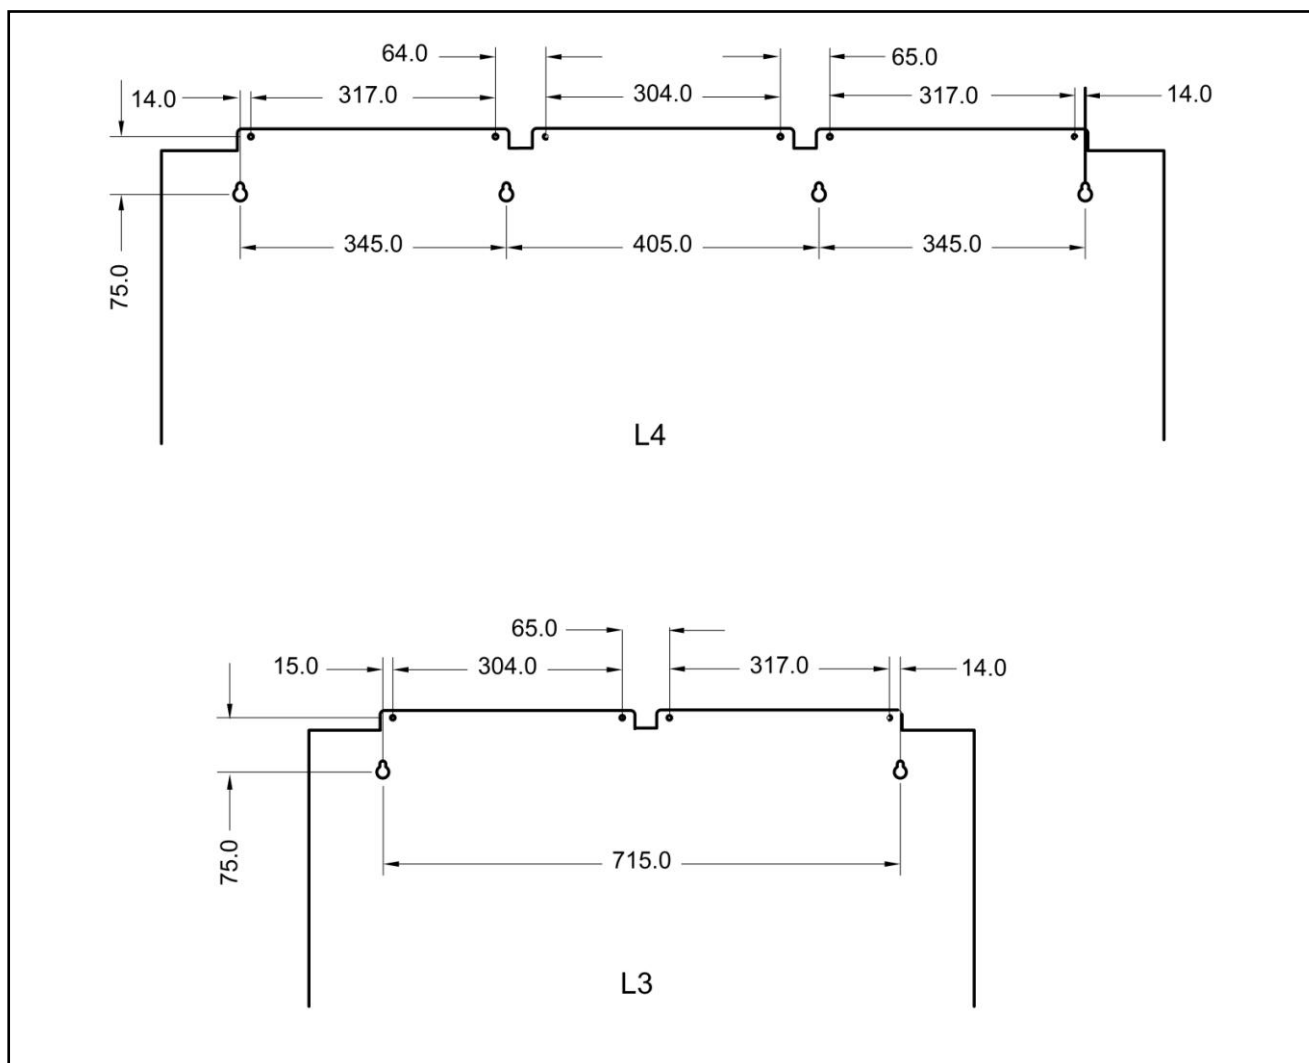


Fig 1

Power Ratings

Model	kW	Amps
L3	0.35	1.5
L4	0.45	2.0

OPERATING INSTRUCTIONS

Only qualified or trained personnel should use this appliance.

Connect the appliance to the electricity supply. Turn on the power switch Fig 2 (A).

To use the lights, operate switch (B).

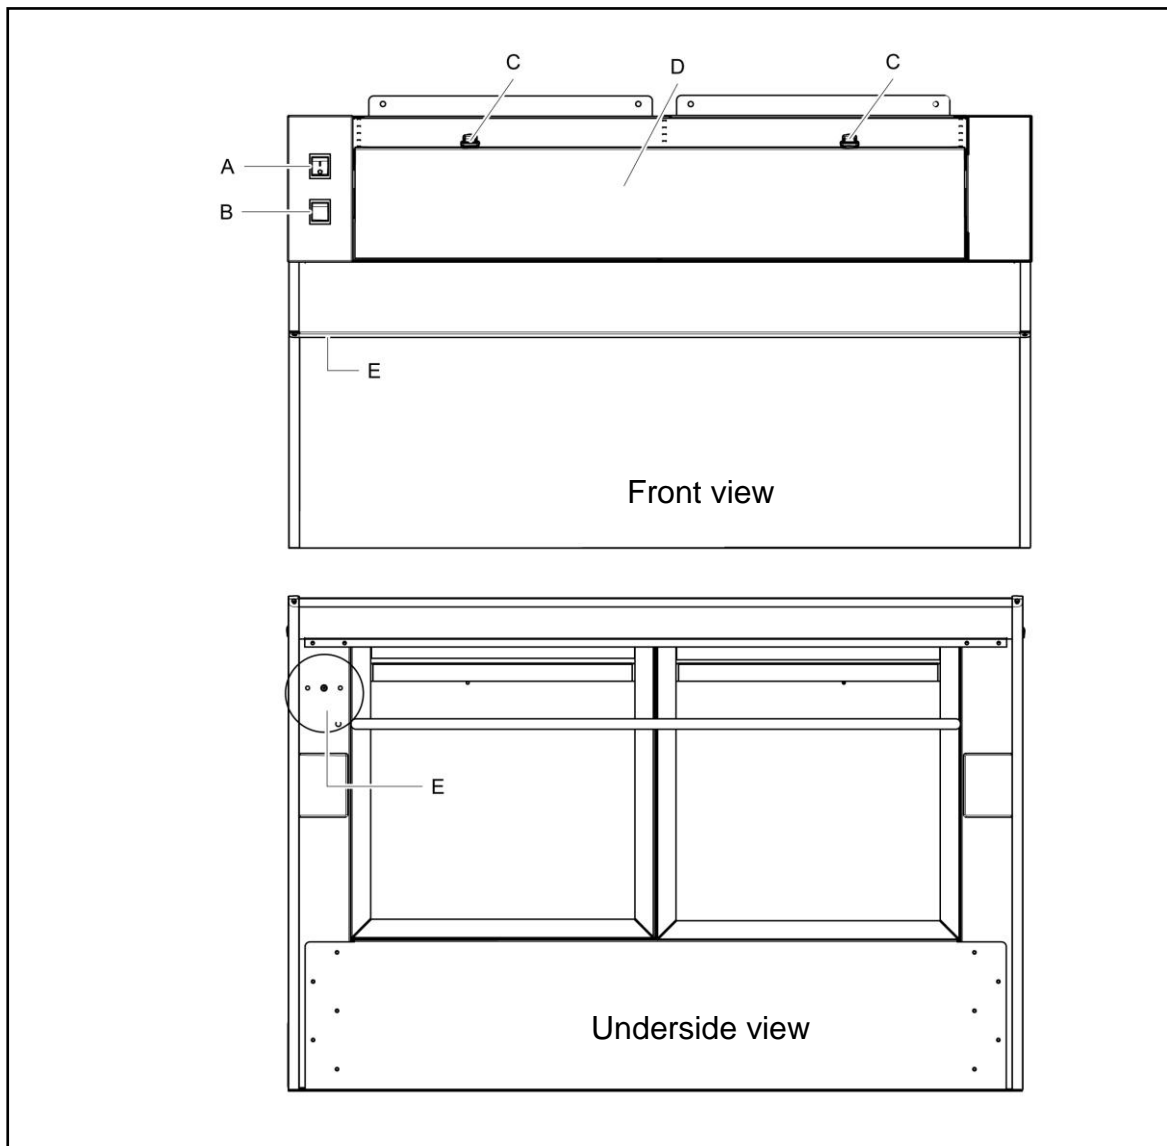


Fig 2

This appliance is fitted with a safety thermostat to cut off the power in the event of a fault. To re-set the safety thermostat, press the button as located in Fig 2, E.

CLEANING



Do not use a water jet or steam cleaner, and do not immerse this appliance.

Clean all panels with warm water and mild detergent, do not use abrasive materials. Dry with a soft cloth.

Avoid damaging the thermostat capillary during cleaning.

SERVICING, MAINTENANCE AND COMPONENT REPLACEMENT

Lamp bulb

Disconnect the appliance. Carefully prise glass cover off with a flat bladed screwdriver.

Replace bulb and re-fit glass cover.

Filters

Disconnect the appliance. Release the latches - Fig 2 (C) and open the door (D).

Slide filters out and replace. Close and secure door.

All other servicing, maintenance and component replacement on this appliance should be carried out by one of our recommended service engineers.

FAULT FINDING

Please refer to the Service Help Desk number on the final page of this manual.

SPARE PARTS LIST

Part Number	Description	Used on
FA25	Fan	L3, L4
FI11	Aluminium filter	
FI13	Charcoal filter	
FI15	Foam filter pad	
LA14	Light	
PL201	Plug and lead	
SU15	Latch	
SW69	On/Off switch	
SW70	Light switch	
TH73	Thermostat	

SERVICE INFORMATION

For help with the installation, maintenance and use of your **Lincat** equipment, please contact our service department:

☎ UK: 01522 875520

For non-UK customers, please contact your local Lincat dealer

All service work, other than routine cleaning should be carried out by one of our authorised service agents. We cannot accept responsibility for work carried out by other persons.

To ensure your service enquiry is handled as efficiently as possible, please tell us:

- Brief details of the problem
 - Product code
 - Type number
 - Serial number
- } All available on serial plate

Lincat reserve the right to carry out any work under warranty, given reasonable access to the appliance, during normal working hours, Monday to Friday, 08:30 to 17:00.

GUARANTEE

This unit carries a comprehensive UK mainland 2 year warranty. The guarantee is in addition to, and does not diminish your statutory or legal rights.

The guarantee does not cover:

- Accidental damage, misuse or use not in accordance with the manufacturer's instructions
- Consumable items (such as filters, glass, bulbs, slot toaster elements and door seals.)
- Damage due to incorrect installation, modification, unauthorised service work or damage due to scale, food debris build-up, etc.

The manufacturer disclaims any liability for incidental, or consequential damages. Attendance is based on reasonable access to the appliance to allow the authorised technician to carry out the warranty work.

Service calls to equipment under warranty will be carried out in accordance with the conditions of sale. Unless otherwise specified, a maximum of 15 minutes of administrative time, not spent directly carrying out servicing work, is provided for within the warranty. Any requirement for staff attending the call to spend greater time than 15 minutes due to administrative requirements, such as on health and safety risk assessments, will be chargeable at the prevailing rate.