



Foodservice Equipment Price List UNITED KINGDOM - July 1, 2019





How to Order

To ensure prompt and accurate processing of your order, please provide the following information:

- 1. Model number, voltage and phase.
- Specify options and accessories as required. Options are not retrofittable.
- Consult Hatco ^c/₀ Gamble Foodservice Solutions when ordering equipment for special applications.

ALL WATT RATINGS ARE Nominal. Actual Wattage May Vary. Consult Factory For More Information.

Email orders to: sales@gamblefs.co.uk

Fax orders to: 01509 260 151

Mail orders to: Hatco Corporation St. George's House

Rearsby Business Park Gaddesby Lane, Rearsby Leicestershire LE7 4YH Telephone: 01509 260 140

www.hatcocorp.com

Who We Are

Since 1950, Hatco has been a leader in creating innovative ideas for the foodservice industry: bold innovations in equipment that improves efficiency, reliability and profits. Products are designed and built to handle the rugged demands of today's foodservice operations. Hatco is a company dedicated to exceptional customer service and quality engineered equipment offering maximum performance.

We Pride Ourselves On Being Employee Owned

The company was started by Gordon and LaReine Hatch in 1950 and was lead by their son, David, beginning in 1990. In 2004, Hatco Corporation began the journey of employee ownership, and in 2007, a monumental event in Hatco history occurred: the employees assumed 100% ownership from David Hatch! Hatco still remains a family corporation - only now our family is larger. The employee owners are driven by the spirit of ownership and motivated by the empowerment of ownership.

Equipment

Buffet Warmers Built-In Heated Shelves Carving Stations Ceramic Strip Heaters Cold Shelves Conveyorl Toasters Decorative Lamps Display Cabinets Drawer Warmers Frost Tops

- Fry Stations Heated Air Curtain Cabinets Heated Display Cases Heated Glass Shelves Heated Shelves Heated Wells Holding Cabinets Hot/Cold Shelves Ice Wells Induction
- Infra-Black Strip Heaters Infrared Strip Heaters Lamp Warmer Mini-Merchandisers Merchandising Warmers Plate Warmers Portable Holding Cabinets Refrigerated Wells Salamanders Under Counter Water Dispenser

Locations



Milwaukee - Corporate Office 635 South 28th St. | Milwaukee, WI 53215 1-414-671-6350



Sturgeon Bay - Manufacturing Facility 208 East Deck Street | Sturgeon Bay, WI 54235 1-920-743-5595







TABLE OF CONTENTS

INDUCTION	2-3	PORTABLES	35-50
SALAMANDER	4-5	BUILT-INS	51-57
TOASTERS	6-11	DRAWER WARMERS	58-62
DECORATIVE LAMPS & DISPLAY LIGHTS	12-17	MERCHANDISERS	63-76
STRIP HEATERS	19-32	HOLDING & DISPLAY CABINETS	77-86
CARVING STATIONS	33-34	WELLS	87-107

111W 58
CDW
CSBFX
CSSBX, CSSBFX
CSUX
CWBX 91-92
DCS 33
DL 12-17
FDWDE
FS2HAC 86
FSD
FSDT
FSHC-6W 84
FSHC-7
FTBX 89-90
GMFFL
GMFFL
GMFFL 35 GMHD, GMHDH 71 GR2BW 49-50
GMFFL 35 GMHD, GMHDH 71 GR2BW 49-50 GR2SDH, GR2SDH-xxD 66-67
GMFFL
GMFFL
GMFFL 35 GMHD, GMHDH 71 GR2BW 49-50 GR2SDH, GR2SDH-xxD 66-67 GR2SDS, GR2SDS-xxD 66-67 GR3SDS 70 GM5AH 19
GMFFL
GMFFL
GMFFL 35 GMHD, GMHDH 71 GR2BW 49-50 GR2SDH, GR2SDH-xxD 66-67 GR2SDS, GR2SDS-xxD 66-67 GR3SDS 70 GM5AH 19 GRAH, GRAHL 20-21 GRAH, GRAHL 22-23 GRAH-xxD, GRAHL-xxD 24-25
GMFFL

GRBW
GRCD, GRCDH73-74
GRCMW
GRCSCL, GRCSCLH
GRFF, GRFFL, GRFFB, GRFFBL 35-36
GRFHS 37-38
GRFS 37-38
GRH
GRHD, GRHDH
GRHW
GRS 46-47
GRSDH, GRSDH-xxD 64-65
GRSDS, GRSDS-xxD 64-65
GRSDS/H 63
GRSR 40
GRSS 43
GRSSB 56
GRSSR 41-42
HBG 44
HBGB
HBGBH
HCSBFX
HCSSBX, HCSSBFX
HDW
HDW-xRx
-
HGSM
HWB-xx 100-107

49-50	HWB-43 100-107
73-74	HWB-xQT 100-107
72	HWBI43 95, 97
34	HWBI, HWBI-S 95-99
35-36	HWBRN
37-38	HWBRT100-107
37-38	HXMH, HXMH-xxD
22-23	HXMS, HXMS-xxD
75-76	IRNG2-3
48	ITQ 6
46-47	IWB, IWB-S 87-88
64-65	LW
64-65	MDW 83
63	PWB, PWC
40	QTS 5
43	RCTHW
56	RHW
41-42	RMBs
44	ТК 11
57	TM
57	TM3
53	TMS
52	TQ 10
59-62	ТQ3 9
60, 62	UGAH, UGAHL
45	UGAH-xxD, UGAHL-xxD27-28
100-107	UGFF, UGFFL, UGFFB, UGFFBL 35-36
	,



Rapide Cuisine® Countertop High-Powered/Heavy-Duty Induction Hobs

Hatco's patent-pending Rapide Cuisine® High-Powered/Heavy-Duty Induction Hob offers industry leading features and true back of house power in a commercial kitchen proof package.

The unit features our Magnetic Power System (MPS) to deliver the highest power in its class! It has User Programmable Presets (UPP) for repeat menu items and a food temperature probe for more accurate cooking, plus a timer, high resolution color display and convenient power and temperature modes.

- Commercial kitchen ready. Heavy gauge stainless steel housing with side impact protection for the top
- Four surface temperature sensors offer the most accurate control in its class
- Culinary equivalent of up to 31,000 BTUs gas
- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), temperature (°C or °F in one degree increments) and time control (30 seconds to 10 hours)
- Programmable mode so the operator can create preset programs for consistent cooking cycles
- Includes a grease filter and features conformal coated boards
- Easy to use color-coded selectable functions

- Large adaptive control for precise, fine control (slow turns) to spanning the full range in a single twist (fast turns)
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Patterned, glass-ceramic top that is durable, easy to clean and helps scratches from heavy use appear less noticeable
- Easy to clean, fully-sealed top stops grease or moisture from penetrating the unit, even if the top gets broken
- Automatic shut-off to prevent overheating
- Withstands high ambient kitchen temperatures up to 51°C
- USB port for downloading updates or adding Modes from our website
- 1800 mm cord with plug

Close up of patterned black glass-ceramic top – helps prevent noticeable scratches due to heavy use





Includes a food temperature probe which facilitates highly accurate cooking



COUNTERTOP HIGH-POWERED/HEAVY-DUTY INDUCTION HOBS

			Dimensions	Voltage			
	Model	Item No.	W x D x H	Single Phase	Watts	Ship Weight [†]	List Price
~	IRNG-PC1-30	IRNGPC130SBBS	352 mm x 471 mm x 94 mm	230/240	2990/3120	10 kg	£1319

IRNG-PC1-30

⁺ Shipping weights are approximate.

All Countertop High-Power/Heavy-Duty Hob Models Feature: Models Shipped with: 1800 mm cord and plug (includes a temperature probe). Cord Location: Rear left bottom base corner.





onnicenticenticent

shown in the standard finishes

IRNG-PB1-30

Rapide Cuisine® Built-In High-Powered/Heavy-Duty Induction Hobs

Hatco's patent-pending Rapide Cuisine® Built-In High-Powered/ Heavy-Duty Induction Range offers industry-leading features and true back-of-house power in a commercial kitchen proof package.

The unit can be mounted flush or near flush with the optional trim ring. It features our Magnetic Power System (MPS) to deliver the highest power in its class! It has User Programmable Presets (UPP) for repeat menu items and a food temperature probe for more accurate cooking, plus a timer, high resolution color display and convenient power and temperature modes.

- Four surface temperature sensors offer the most accurate control in its class
- Culinary equivalent of up to 31,000 BTUs gas
- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), temperature (°C in one degree increments) and time control (30 seconds to 10 hours)
- Programmable mode so the operator can create preset programs for consistent cooking cycles
- Includes conformal-coated boards
- Easy to use color-coded selectable functions
- Large adaptive control for precise, fine control (slow turns) to spanning the full range in a single twist (fast turns)

• Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top

July 1, 2019

- Patterned, glass-ceramic top that is durable, easy to clean and helps scratches from heavy use appear less noticeable
- Easy to clean, fully-sealed top stops grease or moisture from penetrating the unit, even if the top gets broken
- Automatic shut-off to prevent overheating
- Withstands high ambient kitchen temperatures (up to 51°C)
- USB port for downloading updates or adding Modes from our website
- Includes a remote control panel and cord
- 1800 mm cord with plug

Close up of patterned black glass-ceramic top – helps prevent noticeable scratches due to heavy use



HIGH-POWERED/HEAVY-DUTY BUILT-IN INDUCTION HOBS

	Model	Item No.	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight ⁺	List Price
~	IRNG-PB1-30	IRNGPB130SBBS	343 mm x 368 mm x 91 mm	230/240	2990/3120	10 kg	£1391

⁺ Shipping weights are approximate.

Induction

Range

Preset Programmable

All Built-In High-Power/Heavy-Duty Models Feature:

Models Shipped with: 1300 mm cables from the base unit to the control panel and 1800 mm cord and plug (includes temperature probe). Cord Location: Rear right bottom base corner.

ACCESSORY (available at any time)

IRNG

PB

Holds unit nearly flush on the counter (for use where chair-step routing of a countertop material is not possible, but a flush mount look is desired) -TRIM-PB1-36 Stainless Steel Trim Ring for IRNG-PB1-30 £40

ХХ

Hob/Coil

Built-In

- 30 = 2990/3120 watts





Includes a food temperature probe which facilitates highly accurate cooking

💋 Stock Items page 110



Therm-Max[®] Salamander

Hatco's Rise and Fall Salamander is specially designed for versatility in the kitchen with the capabilities to cook, grill and reheat food. The unparalleled start-up speed is a result of "Instant/On" heating elements located in the upper housing of the salamander. The Therm-Max Salamander is energy efficient and easy to operate.

- The high-powered heating elements are ready for use within 8 seconds
- Two sets of independently-controlled heating element sections give the benefits of flexibility and energy conservation
- Cook mode selection switch controls left, right or both locations
- Made of stainless steel for easy cleaning and durability
- Can be placed on a countertop or mounted to a brick or cement wall (mounting bracket comes standard)






V Stock Item page 110

THERM-MAX SALAMANDER											
	Model	Dimensions W x D x H	Voltage 50/60 Hz	Phase	Cooking Area W x D x H	Watts	Amps	Ship Weight	List Price		
~	TMS-1	600 x 503 x 515 mm	230/400	3	540 x 373 x 90-260 mm	4000	8.7	70 kg	£2082		

Therm-Max Salamander Model Features:

Models Shipped with: Grill, drip pan and wall mounting bracket.

Cooking Area: 540 W x 373 D x 90-260 H mm. Power Inlet Location: Right side of back of unit near bottom (cord and plug not included).







💋 Stock Item page 110

Quick-Therm Salamander

A notch above a traditional salamander, the Hatco Rise and Fall Salamander incorporates many unique features, which serve to simplify operations and improve functionality. With the Hatco Quick-Therm Salamander, you can now start cooking, grilling, reheating or holding foods hot in just eight seconds!

- Reduced transfer of heat to surrounding area for effective energy savings
- Three high powered heating elements are ready for use within eight seconds and can be independently controlled
- Cooking grate, drip pan, and wall mounting bracket comes standard
- The Plate Detection feature automatically activates the heating elements when a food plate comes into contact with the plate detection mechanism. Removal of the food plate turns off the heating elements




QUICK-THERM SALAMANDER

	Dimensions			Cooking Area				
Model	W x D x H	Voltage	Phase	W x D x H	Watts	Amps	Ship Weight	List Price
∕ QTS-1≜	576 x 550 x 518 mm	240/415	3	546 x 360 x 78-193	4500	6.3	75 kg	£3906

The Quick-Therm Salamander Model Features:

Models Shipped with: Cooking grate, drip pan, and wall mounting bracket. Power Inlet Location: Right side of back of unit near bottom (cord not included).



Saves Energy, Saves Money, Protects your Reputation!



Do your bit for Global Warming with Hatco's QTS-1. The Hatco Quick-Therm Salamander's elements are ready for use in just eight seconds. How does that work? Mounted on the back wall of the Salamander is a "plate detection" switch that keeps the unit from turning on unless a plate or pan is put

underneath or against this bar. That means the elements are only on when they need to be. Most kitchens have every piece of equipment on all day, firing out heat and constantly using energy. And even in power save mode, most equipment is never fully off. Not the Quick-Therm Salamander, it's 100% off when not in use, saving you money, energy and the environment.

Custom Heating Elements

The heating elements in the QTS-1 salamander may be operated independently, utilizing the benefits of flexibility and energy conservation. Different combinations of elements may be selected to cook the desired quantities of food the way you like. Below are the examples of seven available combinations possible in using the heating elements.





Intelligent Toast-Qwik[®]

Hatco's Intelligent Toast-Qwik[®] allows the operator to toast multiple products at the touch of the button, changing easily from bagels and toast to hash browns and garlic bread to crumpets and croissants, as well as melting cheese and finishing smaller food products. The unit can easily take the place of the current toasting platform and add versatility and future menu expansion along with energy efficiency and cost savings.

- The conveyor toaster can operate in four different modes:
 - ~ Continuous Through Put
 - ~ Select Single Item Mode
 - ~ In and Reverses Out Mode
 - ~ In, Pause, then Continues Through
- USB port located on the front allows for easy transfer of information such as program changes and product usage information
- The ability to program up to twenty product settings
- Hatco's patented ColorGuard Sensing System monitors and adjusts conveyor speed and temperature during high usage periods to ensure toast color uniformity
- Using Hatco's Spot-On® Technology, the toaster senses when product is placed on the conveyor and activates the unit
- Easy to clean, with removable crumb tray and collector ramp. There is minimal operator maintenance required, with self-cleaning elements and no maintenance motor and conveyor drives



ITQ-875-1C

HORIZONTAL CONVEYOR TOASTER



ITQ-1000-1C



ITQ-1750-2C

Model	Voltage	Dimensions (W x D x H)	Opening Dimensions W x H	Watts	Amps	Capacity/ Minute [†]	Ship Weight	List Price
ITQ-875-1C	230	370 x 727 x 420 mm	154 x 56 mm	2700	11.8	15	41 kg	£3798
ITQ-1000-1C	230	450 x 727 x 457 mm	240 x 51 mm	3600	15.7	17	40 kg	3821
ITQ-1750-2C	230	505 x 728 x 420 mm	two openings at 136 x 57 mm	4960	21.6	30	48 kg	5273
ITQ-1750-2C	230		two openings at 136 x 57 mm			30	- 5	

[†] Toasting capacity may vary by product. Toasting of coated products not recommended.

All Horizontal Conveyor Toaster Models Feature:

Plug Options: ITQ-875-1C: BS-1363.


ITQ-1000-1C: no plug.

ITQ-1750-2C: no plug.

Intelligent Toast-Qwik

Cord Location: 1828 mm cord, left center on back of unit.

Model Number

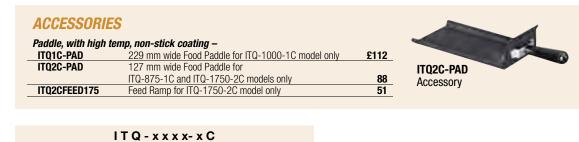

1C = Single Conveyor 2C = Dual Conveyor





Toast-Max® Conveyor Toaster

The Toast-Max Electric Conveyor Toaster is fast, reliable and versatile, toasting up to 460 bread or bun products per hour depending on bread type. Featuring long-lasting serpentine metal sheathed heating elements and a permanently lubricated conveyor motor.

- Durable stainless steel construction
- ColorGuard Sensing System ensures toast color uniformity
- Powersave mode with indicator light saves energy during off-peak periods
- Allows for toasting bread products up to 38 mm thick
- Utilizing conveyor speed, not temperature, to determine toasting color allows for instant adjustment of toasting time
- Units are shipped with 25 mm adjustable legs, feed ramp, removable crumb tray and a discharge chute



TM3-10 in Designer Black, Red and standard Stainless Steel

Se 2	

V Stock Item page 110

ТО	AST-MAX	CONVEYOR TOASTE	R							
	Model	Dimensions W x D x H	Slot Opening W x H	Voltage Single Phase	Hz	Watts	Amps	Capacity/ hour [†]	Ship Weight	List Price
NEW	TM3-5	290 x 535 x 412 mm	186 x 38 mm	220-240	50/60	1320-1575	6.0-6.6	230-280	16 kg	£703
~	TM3-10	368 x 535 x 412 mm	264 x 38 mm	220- 240	50/60	1920-2285	8.7-9.5	390-460	19 kg	916
+ T.	action concel	ty may yory by product Tao	ation of control word	unto mot vo comence	مامما					

* Toasting capacity may vary by product. Toasting of coated products not recommended.

All Toast-Max Models Feature:

Cord Location: Back of unit, bottom right side.



OPTIONS (available at time of purchase only)

Designer Colors - Non-standard colors are non-returnable -

~	SS	Stainless Steel	Standard
~	RED	Warm Red	No Charge
~	BLACK	Black	No Charge
	WHITE	White Granite (not available for Stock Item)	£94
	NAVY	Navy Blue (not available for Stock Item)	94

ACCESSORIES

TM3-10-BUNFEED	Extended Feed Ramp for Buns (TM3-10 model only)	£11
TM3-10-SECURITY	Control Cover and Bracket (TM3-10 model only)	31

COLORS AND FINISHES – INSIDE BACK COVER

	<u>T M 3</u> - <u>x x</u>
Toast-MAX	10 = Full-size (2 slice toaster)
	5 = Half-size (1 slice toaster)



Toast-Max[®] Conveyor Toasters

The Hatco economy Toast-Max[®] conveyor toasters offer the flexibility and performance to perfectly toast bread and buns fast - up to 300 slices per hour. Using conveyor speed, not temperature, to determine toasting color allows for instant adjustment of toasting time. Toast-Max features an easyto-use 4-position toast selector switch with Off / Toast / Buns / Stand-by.

- Long-lasting serpentine metal sheathed heating elements
- 102 mm adjustable legs
- Permanently lubricated 50/60 Hz
 motor
- V-shaped reflectors help capture and redirect heat
- 50 mm clearance to accommodate all types of bread products
- Discharge and crumb trays are removable for easy cleaning
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient for sending product to the operator side or to the customer/server side





7 Stock Item page 110

TOAST-MAX CONVEYOR TOASTERS


	Model	Dimensions W x D x H [●]	Opening Dimensions $W \ x \ H$	kW	Voltage Single Phase	Hz	Amps	Capacity Per Minute [†]	Ship Weight	List Price
~	TM-5	290 x 419 x 387 mm	186 x 50 mm	1.6	230	50/60	6.6	3 slices	16 kg	£654
•	TM-10	368 x 419 x 387 mm	264 x 50 mm	2.3	230	50/60	9.6	6 slices	19 kg	847

• Add 203 mm to depth if using tray extension in rear. Height includes legs.

⁺ Toasting capacity may vary by product. Toasting of coated products not recommended.

All Toast-Max Models Feature:

Bread Types: Bread or buns. Maximum Product Size: TM-5: 176 W x 44 H mm. TM-10: 254 W x 44 H mm. Cord Location: 1829 mm on left side of back of unit near bottom.







Toast-Qwik[®] Conveyor Toasters

Hatco's industry-leading Toast-Qwik Toasters have been completely redesigned to provide a great new look, easy to use touchscreen controller, and increased production capabilities. They continue to provide the best reliability, flexibility, and value of any conveyor toaster available!

- Patented ColorGuard sensing system which monitors and adjusts conveyor speed to ensure consistent toast results - even in your busiest periods
- Dynamic new touchscreen controller that is easy to see and easier to use
- Up to 12 programmable settings for precise and instant product changes
- USB port for easy uploads of program changes and software updates
- Unique new toast delivery ramp moves your product to the storage tray each and every time
- Crumb tray is removeable for easy cleaning
- 51 mm high opening Standard -76 mm high opening available on the TQ3-500H, -900H and -2000H models for thicker bread products



rQ3-500 shown in optional *Designer* Warm Red



shown in optional Stainless Steel



W Stock Item page 110

	HORIZONTA	L CONVEYOR TOASTE	RS						
	Model	Dimensions (W x D x H) Height includes legs	Opening Dimensions W x H	Voltage 50/60Hz	Watts	Amps	Capacity/ Minute [†]	Ship Weight	List Price
	Toasts Two Sli	ces Wide							
~	TQ3-500	374 x 524 x 435 mm	258 x 51 mm	230-240	2039-2220	8.9-9.3	7-8 slices	25 kg	£1966
	TQ3-500H	374 x 524 x 435 mm	258 x 76 mm	230-240	2039-2220	8.9-9.3	7-8 slices	25 kg	1966
	TQ3-900	374 x 524 x 435 mm	258 x 51 mm	230-240	2774-3020	12.1-12.6	15 slices	25 kg	2095
	TQ3-900H	374 x 524 x 435 mm	258 x 76 mm	230-240	2774-3020	12.1-12.6	15 slices	25 kg	2095
	Toasts Three S	Slices Wide							
NEW	TQ3-2000	475 x 536 x 436 mm	359 x 51 mm	220-240	3678-4020	16.7-16.8	33 slices	30 kg	£2693
HEW	T03-2000H	475 x 536 x 436 mm	359 x 76 mm	220-240	3678-4020	16.7-16.8	33 slices	30 kg	2693
† Tc	poeting conocity m	any vary by product. Togeting o	f agatad products pat race	mmondod					

⁺ Toasting capacity may vary by product. Toasting of coated products not recommended.


All Horizontal Conveyor Models Feature:

Cord Location: 1829 mm cord - lower right corner on back of unit.

OPTIONS (available at time of purchase only)

SS	Side Panels – Non-standard colors are non-returnable – Designer Black Stainless Steel	£151
WRED	Designer Warm Red	No Charge
SSINSERT	Stainless Steel toast tray insert (for TQ3-500 and -900 series only)	31
TQ3-RAMP	Extended feed ramp adds 76 mm	78

COLORS AND FINISHES – INSIDE BACK COVER





Toast-Qwik[®] Conveyor Toasters

Hatco's Toast-Qwik[®] conveyor toasters gives you flexibility and performance. Using conveyor speed, not temperature, to determine toasting color allows for instant adjustment of toasting time.

- Instant and precise adjustment of toast color with electronic infinite controls that regulate top and bottom heat
- Hatco's ColorGuard Sensing System assures toast uniformity for Toast-Qwik Toaster series
- Optional Power Save Mode on the Toast-Qwik series conserves energy
- Opening height for Toast-Qwik, H and HBA models is 76 mm, for all other models the opening height is 51 mm
- Capacity of 400-1800 slices per hour, depending on bread type

- Insulation and an interior fan provide cool surface temperatures
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient for sending product to the operator side or to the customer/server side
- Permanently lubricated ball bearing motor and heating elements guaranteed against burnout and breakage for two years



TQ-800BA with accessory security control cover



💋 Stock Item page 110

Ship Weight List Price
21 kg £1701
21 kg 1624
21 kg 1624
28 kg 2063
28 kg 1850
28 kg 1850
33 kg £2343
33 kg 2343
33 kg 2343
33 kg 2343

• TQ-405, -400H, and -400BA, add 64 mm to depth if using tray extension in rear.

TQ-805, TQ-800BA, TQ-800HBA, TQ-1800, TQ-1800BA, TQ-1800H and TQ-1800HBA, add 165 mm to depth if using tray extension in rear. Height includes legs.

[†] Toasting capacity may vary by product. Toasting of coated products not recommended.

▼BA models toast one side only and are for bagels and buns, cut side up.

All Toast-Qwik Models Feature:


Bread Types: TQ-405, -400H, -805, -1800, -1800H: All bread types.

TQ-400BA, -800BA, -800HBA, -1800BA, -1800HBA: Bagels or buns.

Maximum Product Size: TQ-405, -400BA, -805, -800BA: 244 W x 44 H mm.

TQ-800HBA: 244 W x 70 H mm.

Cord Location: 1829 mm on lower right corner on back of unit.

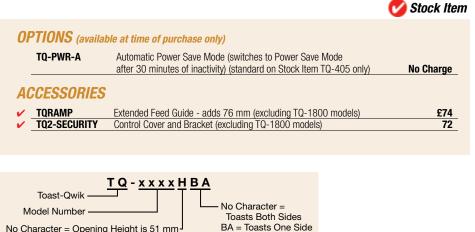

Only (Buns/Bagels)

No Character = Opening Height is 51 mm¹ H = Opening Height is 76 mm





Toast King[®] Conveyor Toasters

Designed for mid- to high-volume and constant flow applications, Hatco's proven reliability and performance makes the TK toasters the workhorse of your operation. These toasters use conveyor speed, not temperature, to determine toast color.

- Toasts a variety of bread products
- Stainless steel construction for years of trouble-free service
- Power saving thermostat for energy savings during non-peak times
- Manual advance and speed control
- Fully insulated for cooler operation
- Multiple metal sheathed toasting elements
- Toast storage area keeps bread warm and dry
- Capacity of 720-1320 slices per hour
- Three basket access for fast loading
- Top venting keeps heat away from the operator







TUAST KING U	CONVEYOR IC	JASTERS					
Model	Voltage	kW	Dimensions● W x D x H	Amps	Capacity per Minute [†]	Ship Weight	List Price
Bread or Buns							
TK-75	240	5.2	464 x 448 x 845 mm	21.8	12 slices	35 kg	£3051
TK-105	240	7.5	578 x 448 x 845 mm	31.0	16 slices	40 kg	3242
Buns							
TK-135B	240	5.0	578 x 448 x 845 mm	18.1	22 slices	40 kg	£3004

TK-135B

• Width included 19 mm for manual advance knob. Depth includes tray extension of 89 mm.

[†] Toasting capacity may vary by product. Toasting of coated products not recommended.

All Toast King Models Feature:

Voltage: 240V, 50 Hz, single phase.

Basket Size: TK-75 (Two-slice model): 254 W x 117 H mm.

TK-105, -135B (Three-slice model): 368 W x 117 H mm.

Maximum Product Thickness: 32 mm. Cord Location: TK-75, -135B: 1219 mm on lower left side on back of unit. TK-105: Not supplied with cord.

Toast King T K - x x x B B = Buns model (Toasts one side) Model Number No Character = 2 sided toasting
OPTIONS (available at time of purchase only)
TK-SECURITY Control Cover, Bracket, Mounting Hardware and Fuse Cover

£134





ORDERING INSTRUCTIONS


Luminaire lamps are for lighting only. LUMINAIRE option must be specified when lamps are utilized for decorative purposes only (no heating). This option is not field convertible. Maximum 100 watts.


CLEARANCE REQUIREMENTS

- NOTE: Install 240V, 250W bulb no closer than 25 mm from a sidewall and no closer than 406 mm above a combustible surface, or no closer than 127 mm to a non-combustible surface.
- NOTE: Install HIGH WATT 240V, 375W bulb no closer than 25 mm from a sidewall and no closer than 686 mm above a combustible surface, or no closer than 127 mm to a non-combustible surface (240V, 375W bulb not available).
 NOTE: Multiple installations of Decorative Lamps must have a minimum of 305 mm on center of shade between each unit.

Specify the following information with your order:

- 1. Electrical: 240V single phase and Wattage: 100W, 250W, 375W
- 2. Mounting Style Code: A, C, P, R or S
- 3. Switch Location Code: Lower (L), None (N), Remote (R) or Upper (U)
- DLH models must have remote switch or none
- **4.** Shade Style Code: -400, -500, -600, -700, -725, -750, -760, -775, -800, -1100, -1200, -1300, -1400, -1500
- 5. Shade and Canopy Colors:
 - Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, Smooth White, Gleaming Gold, Glossy Gray, Bold Black, Radiant Red* (lampshade only), Brilliant Blue* (lampshade only), Clear Coat Brushed Metal* (lampshade only), Bright Brass*, Bright Nickel*, Bright Copper*, Antique Nickel*, Antique Brass*, Antique Bronze*
- 6. Overall Unit Length: For C or S Mounts, from ceiling to bottom of warmer lamp shade For A or P Mounts, from center of shade to wall plus vertical shade length
- 7. Clearance: From bulb to surface (see NOTE Clearance Requirements above)
- 8. Accessory Bulb Color/Coating:
 - 40W Clear Coated (Luminaire only) 250W Clear Uncoated or Clear Coated
- (240V, 375W bulb not available)
- 9. Optional Cord Color: Black (standard), White (optional)
- * Special process required and extended lead times, see page 16 for additional charge. Specify appropriate accessories with your order.



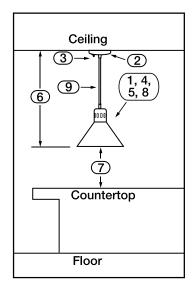





Decorative Lamps/ Luminaires


Hatco Decorative Lamps provide radiant heat to briefly hold food warm at kitchen work areas, wait staff pickup stations or customer serving points, while enhancing your décor. Versatile enough for any location, the range of lights are available with a selection of personalized choices: shade styles, colors, switch locations and mounting arrangements. Configurations for lighting (Luminaire), as well as foodwarming, are available.

NOTE: Decorative Lamps and Luminaires are non-returnable.

- Decorative Lamps available in fourteen shade styles
- Five different mounting arrangements to choose from
- Seven *Designer* colors, seven Gloss finishes and six Plated finishes available
- Four power switch options: Upper (on canopy), Lower (at stem), Remote, None
- Available for food holding and display or lighting only applications

Rigid Stem Mount matches unit color (except for Gloss finishes of Radiant Red, Brilliant Blue and Clear Brushed Metal)

Black cord is standard and white cord is optional Various cord lengths available, starting at 432 mm, while rigid and retractable can vary

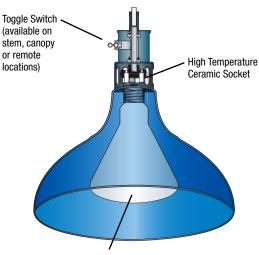

Bulbs for: 40W clear coated (Luminaire only, 240V) 250W (DL models, 240V) in clear, uncoated or coated High watt bulb not available

Build A Decorative Lamp

Hatco has given you two simple and easy ways to "Build Your Decorative Lamp":

- ONLINE at **www.hatcocorp.com**. Click on the "Build a Lamp" tab on our website. Follow the easy steps to build your custom lamp. When finished you can download a color PDF of your lamp configuration and a Hatco List Price Quote.
- OR GO to **"How to Build Your Lamp"** on pages 14 through 16 in this Hatco Price List. Build your Hatco model code and List Price. Then go to page oo for the accessories, *(bulbs are not included in the unit price)*, to easily complete your total order.

BUILD	HOW TO BUI A LAMP		DL - 775 - CR orative Lamp	— Switch Type/Location — Mounting Style
LAMP	1 Electrical	DL	Specify t (Standard Watt - 250 watt max)	he following options when ordering: No Charge
	2 Mounting Style	C	(Cord Mount)	No Charge
Now you can develop your	3 Switch Location	R	(Remote Switch Location)	No Charge
own Hatco Decorative Lamp solutions with our online	4 Shade Style	-775	(Shade Style on page 15)	£274
lamp configurator.	5 Shade Color	BBRASS	(Bright Brass Plated Finish)	113
amp oormgaraton.	6 Overall Length	2032 mm	>1829 mm (£12 over 1829 mm - o	nly C Mounting Style) 14
Visit www.hatcocorp.com	7 Bulb Choice	WHITE-UCTD-24) (Bulb Choice)	46
Click on "Build a Lamp"	(Specify to the neare	st millimeter – CL, C	U, PL, PU, SL, SU mounts only).	TOTAL £447
	Information indicated	I in red are items th	at the customer should enter (bulbs are n	ot included in the unit price).



Build A Decorative Lamp Configurator Worksheet

Complete the seven steps on this worksheet to configure your Hatco model code and List Price. In order to get exactly what you need in the least amount of time, have this handy when ordering your Hatco Decorative Lamp.






No Charge

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEP 1 AND 2

(To determine your total list price and model code, pick all your options - bulb not included)

STEP 1: ELECTRICAL Voltage 240V

Wattag	e		No Charge
DL-	Luminaire Standard High Watt	100 watt max 250 watt max 375 watt max	

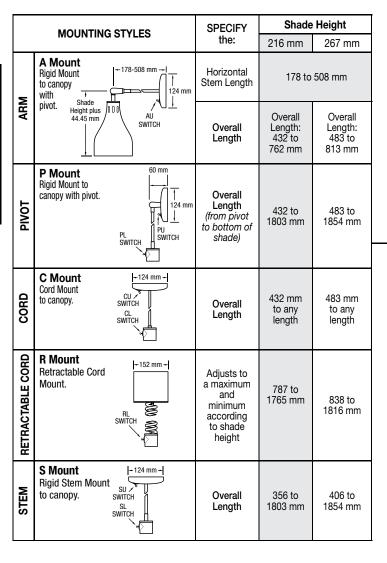

DLX-XXXX-XXX

Decorative Lamp -

H = High Wattage

L=Luminaire Low Watt

No Character = Standard Watt -

STEP 2: MOUNTING STYLE

Mountii	ng Style –	
Α	Arm	£ 46
Р	Pivot	46
C	Cord (specify Cord Color)	No Charge
R	Retractable (specify Cord Color)	168
S	Stem	46

Rigid Stem Mounted (Knock down shipping on S and P units)

Go to next page for Steps 3-4.

NOTE: Decorative Lamps and Luminaires are non-returnable.

Switch Location

Mounting Style

Shade Style




Build A Decorative Lamp Configurator Worksheet

Continued page 14

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS - STEP 3 AND 4 (To determine your total list price and model code, pick all your options - bulb not included)



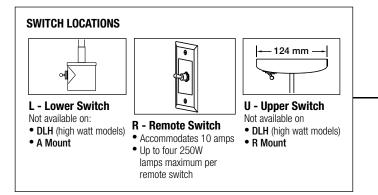

STEP 3: SWITCH LOCATION


Switch Location -No Charge Lower (not available on high watt models) L N R

None Remote

U

Upper (not available on high watt models)

SHADE STYLES (height and width shown)

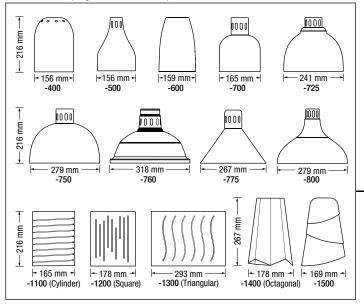

STEP 4: SHADE STYLE

Shade Code	Ship Weight (depending on components)	List Price
-400	3-5 kg	£250
-500	3-5 kg	250
-600	3-5 kg	250
-700	3-5 kg	250
-725	3-5 kg	£274
-750	3-5 kg	274
-760	3-5 kg	274
-775	3-5 kg	274
-800	3-5 kg	274
-1100	3-5 kg	274
-1200	3-5 kg	274
-1300	3-5 kg	274
-1400	3-5 kg	274
-1500	3-5 kg	£309

💋 Stock Items page 110

STOCK ITEMS Specific stock item models available only in colors listed below. For those listed as CL Mounts, the overall length is 1168 mm (includes uncoated bulb).

DL-500-RL in Glossy Gray DL-500-CL in Bright Nickel	£464 409	DL-500-CL in Bold Black DL-500-CL in Bright Copper	£296 409
DL-750-RL in Glossy Gray	488	DL-725-CL in Glossy Gray	320
DL-750-RL in Bright Copper	601	DL-750-CL in Bold Black	320
DL-750-RL in Bright Nickel	601		
DL-775-RL in Bold Black	488		
All ath an DL ma	-l - l - l		

All other DL models have a 6-8 week lead time.

DLX-XXXX-XXX Decorative Lamp -Switch Location No Character = Standard Watt -Mounting Style L=Luminaire Low Watt Shade Style H = High Wattage

Go to next page for Steps 5-7.



Build A Decorative Lamp Configurator Worksheet

Continued page 15

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEP 5 THRU 7 (To determine your total list price and model code, pick all your options - bulb not included)



STEP 5: SHADE AND CANOPY COLORS*

JILI	J. JIADL			LUNJ
Shade ar	nd Canopy Cold	ors –		
Designer	Colors			No Charge
RED	Warm Red	NAVY	Navy Blue	
BLACK	Black	GREEN	Hunter Green	
	Gray Granite	COPPER	Antique Copper	
WHITE	White Granite			
Gloss Fini	shes			No Charge
SWHITE	Smooth White	GGRAY	Glossy Gray	
GGOLD	Gleaming Gold	BBLACK	Bold Black	
*Gloss Fi	inishes for Sha	de Only – ((must choose	
	h for remainder			
Required	and Extended L	ead Times		No Charge
RRED		Radiant Re	ed	
BBLUE		Brilliant Bl	ue	
CL-COA	Т	Clear Brus	hed Metal	
Special P	rocess Required	and Extern	nded Lead Time	s –
Plated Fin	ishes –			
BBRASS	S	Bright Bra	ass	£113
BNICKE	L	Bright Nic	kel	113
BCOPPE		Bright Co		113
ANICKE		Antique N		113
ABRASS		Antique B		113
ABRON	ZE	Antique B	Ironze	113

STEP 6: OVERALL LENGTH

Overall Length – For C Mounts, from ceiling to bottom of warmer lamp shade. For A or P Mounts, from center of shade to wall plus vertical shade length (specify exact length).

Up to 1829 mm	No Charge
Greater than 1829 mm (C Mount only)	£14

🌝 Stock Items


each 7

STEP 7: BULB CHOICE (available for purchase at any time)	
✓ WHITE-UCTD-240	
240 Volt, 250 Watt Clear Bulb, Uncoated	each £46
VWHITE-CTD-240	
240 Volt, 250 Watt Clear Bulb, Coated	each 71
VWHITE-CTD-240L	
240 Volt, 40 Watt Clear Bulb, Coated	

(Luminaire models only)

JUCK ILEN

SHADE AND CANOPY COLORS

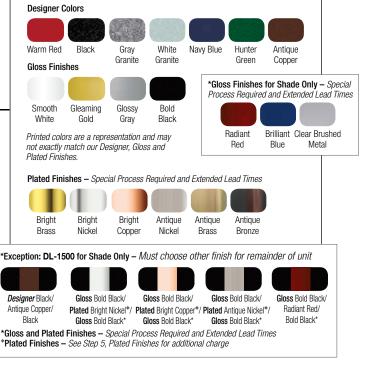







WHITE coated

YOUR TOTAL LIST PRICE AND MODEL CODE

Add the total costs of options below (not for retrofit - bulb not included) -

Step 1	Electrical	£	0.00	DL
Step 2	Mounting Style			
Step 3	Switch Location		0.00	Wattage Code Location
Step 4	Shade Style			Shade Style Code — Mounting Style
Step 5	Shade and Canopy Colors			
Step 6	Overall Length			NOTE: Decorative Lamps and Luminaires are non-returnable.
Step 7	Specify Bulb			
	Your Total Price (bulb not included)	£		<mark>OPTIONS – PAGE 17</mark>



DL-750-RL in Clear Brushed Metal shade finish and unit in *Designer* Black



OPTIONS (available at time of purchase only)

•		
DL-CORD-WHITE	White Cord (C=Cord, R=Retractable Mounts Only)	
	(Black is standard)	No Charge
Leads – For any Sl	, SR or SU Mount units, must specify Lead Length –	
LEADS5	305-1524 mm Extended Electrical Leads	£14
LEADS10	1829-3048 mm Extended Electrical Leads	28
LEADS15	3353-4572 mm Extended Electrical Leads	42
LEADS20	4877-6096 mm Extended Electrical Leads	56

NOTE: Decorative Lamps and Luminaires are non-returnable.

DL-750-CU in Bright Nickel with an optional white cord



Save money lighting your Hatco Glo-Ray® Strip Heater

GREEN ENERGY

Commit to going green in your foodservice operation with Hatco's patented Chef LED Bulbs! Heat strengthened glass lens protects the Light Emitting Diode (LED) while the exterior is made of rugged aluminum and prevents breakage of the components due to incidental contact in a busy kitchen environment. A Chef LED Bulb has substantial benefits and energy savings over other bulbs and are directional.

Other features include:

- Average of 184% increased light output, based on Foot Candle average delivered to surface from a height of 305 mm vs. 40 watt incandescent bulb
- Up to 91% energy savings vs. 40 watt incandescent bulb
- Unique design allows operation over a steam table
- 230V (50-60 Hz) offering
- Warranted for one year

Go to www.hatcocorp.com and download the LED Cost Savings & Energy Analysis calculator to review your energy savings potential.



90° Pivot

> Scan to see how easy it is to install the Chef LED bulb, and direct the light, in your foodwarmer.

Æ



* With 75°C ambient air temperature.

Chef LED Bulbs can be used as an accessory in some equipment. For an up-to-date list call the factory.





Glo-Max[®] Curved Infrared Strip Heaters

This stylish design, based on Hatco's signature Glo-Max[®] Strip Heaters, is the perfect solution for your front-of the-house applications. Superb for buffet and serving lines, the sleek curved design minimizes its size while accenting and warming the products below.

The entire holding surface is heated evenly with no "cold" spots thanks to Hatco's dependable infrared element technology.

- Narrow, curved design uses a very small footprint: 51 H x 153 D mm
- Lengths available from 762-1981 mm
- Available in high watt
- Angle Brackets (mounting) standard
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- End panels and Angle Brackets (mounting) match unit color
- Includes Remote Control Box

GM5AH-36 in standard Clear Anodized

Finish with optional 407 mm non-adjustable tubular

stands (legs)



GM5AH-36 in standard Clear Anodized Finish and angle brackets

GLO-MAX[®] CURVED INFRARED STRIP HEATERS

Model	Width	Watts 230-240V	Amps	Approx. Weight	List Price
High Watt					
GM5AH-30	762 mm	606-660	2.6-2.8	11 kg	£257
GM5AH-36	914 mm	735-800	3.2-3.3	11 kg	271
GM5AH-42	1067 mm	872-950	3.8-4.0	12 kg	287
GM5AH-54	1372 mm	1148-1250	5.0-5.2	13 kg	321
GM5AH-66	1676 mm	1433-1560	6.2-6.5	17 kg	375
GM5AH-78	1981 mm	1736-1890	7.5-7.9	17 kg	437

All Models Feature:

Switch Location: Remote Cotrol Box with power On/Off switch included. Leads: 1524 mm Power Leads. Angle Brackets: Provides 25 mm clearance between Strip Heater and overshelf. Dimensions: 762-1981 W x 153 D x 51 H mm.

Control Box Dimensions: 190 W x 68 H mm.

Cut Out Dimensions: 162 W x 51 H mm.

OPTIONS (available at time of purchase only)

	– Clear Anodized standard – End panels and Angle Brackets match unit co. colors are non-returnable –	lor –			
BLACKANOD	Black Anodized	per 305 mm £33			
Non-Adjustabl	e Tubular Stands, bottom mount, attach to counter – match unit color				
NTL5-16	407 mm clearance	1 pair 6			
RECOMMENDED MOUNTING HEIGHTS – PAGE 32					





Glo-Max® Curved **Infrared Strip Heaters** with LED Lights

Hatco's Glo-Max® Curved Infrared Strip Heaters with LED Lights feature a housing design that is low-profile, elliptical-shaped and stylish, the ideal solution for front-of-the-house applications where heat and lights are needed.

- Narrow, curved design:
- 51 H x 153 D mm uses a very small footprint with lengths available from 762-1981 mm
- Energy efficient, warm LED lights span the entire strip heater, which provide longer performance and energy savings compared to standard incandescent bulbs
- Angle Brackets (mounting) standard
- End panels and Angle Brackets match unit color
- Includes Remote Control Box with power On/Off switch (controls lights and heat)
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food



Finish and standard Angle Brackets.

GLO-MAX[®] CURVED INFRARED STRIP HEATERS WITH LED LIGHTS

Model	Width	Watts 230-240V	Amps	Approx. Weight	List Price
High Watt			•	5	
GM5AHL-30	762 mm	616-670	2.7-2.8	10 kg	£407
GM5AHL-36	914 mm	746-812	3.2-3.4	10 kg	446
GM5AHL-42	1067 mm	885-964	3.8-4.0	11 kg	487
GM5AHL-54	1372 mm	1163-1267	5.1-5.3	12 kg	575
GM5AHL-66	1676 mm	1450-1579	6.3-6.6	14 kg	681
GM5AHL-78	1981 mm	1754-1910	7.6-8.0	16 kg	806

All Models Feature:

Switch Location: Remote Control Box with power On/Off switch (controls lights and heat) included.

Leads: 1524 mm Power Leads Angle Brackets: Provides 25 mm clearance between strip heater and overshelf.

Dimensions: 762-1981 W x 153 D x 51 H mm. Control Box Dimensions: 190 W x 68 H mm. Cut Out Dimensions: 162 W x 51 H mm.

OPTIONS – PAGE 21





OPTIONS (available at time of purchase only)

A **GM5AHL** model in optional Black Anodized finish above a **GRS-54**



Glo-Ray[®] Infrared Strip Heaters

Safely hold the temperature of your product without drying out or further cooking food with Hatco's Glo-Ray[®] Infrared Foodwarmers. The end result is hot, fresh food that's ready-toserve. The sturdy stainless steel or continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Ensures maximum flavor, safety and holding time
- Even heat distribution means no cold spots
- Sturdy extruded aluminum housings that do not sag, from 457 to 1829 mm
- Reflector does not blacken, maintaining a consistent heat pattern
- Protective reinforced wire guard supports heating element without affecting heat distribution
- Pre-focused heat pattern bathes entire holding surface
- Optional sneeze guards (excludes stainless steel models)
- Available with shatter resistant incandescent lights (excludes stainless steel models)
- Additional reflector styles and lower wattage elements available, consult factory for more information

GRAH-48 with optional sneeze guards and T-leg Stands

V Stock Item page 110

GRAH-36 in optional Designer Navy Blue, infinite switch and C-leg Stands



Model	Width	Voltage (Single Phase)	Watts	Ship Weight	List Price
GRH-18	457 mm	240	350	3 kg	£281
GRH-24	610 mm	240	500	3 kg	303
GRH-36	914 mm	240	800	5 kg	338
GRH-48	1219 mm	240	1100	5 kg	364
GRH-60	1524 mm	240	1400	7 kg	411
GRH-72	1829 mm	240	1725	9 kg	487

All Stainless Steel Models Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side.Leads: 152 mm pigtail leads – server's right.Dimensions: 457-1829 W x 152 D x 69 H mm.NOTE: Sneeze guards can not be added to GRH models.

ALLIMINIIM STRIP HEATERS - HIGH WATT

AL	ALUMINUM STRIP REATERS - RIGH WATT								
	Model	Width	Voltage (Single Phase)	Watts	Ship Weight	List Price+			
	GRAH-18	457 mm	240	350	3 kg	£212			
~	GRAH-24	610 mm	240	500	3 kg	227			
	GRAH-30	762 mm	240	660	4 kg	239			
~	GRAH-36	914 mm	240	800	4 kg	252			
~	GRAH-42	1067 mm	240	950	5 kg	263			
~	GRAH-48	1219 mm	240	1100	5 kg	277			
~	GRAH-54	1372 mm	240	1250	6 kg	289			
	GRAH-60	1524 mm	240	1400	6 kg	313			
	GRAH-66	1676 mm	240	1560	7 kg	337			
	GRAH-72	1829 mm	240	1725	8 kg	381			
	GRAH-84	2134 mm	240	2050	9 kg	463			
	GRAH-96	2438 mm	240	2400	10 kg	523			

+ Price includes cord and plug for GRAH-18 through -72 (Cord and plug not available for GRAH-84,-96 models). All Aluminum Models Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified). Dimensions: 457-1829 W x 152 D x 64 H mm.

AL	UMINUM	SIKIP	HEATER	S WITH LIGHTS – HI	GH WA	11	
	Model	Bulbs	Width	Voltage (Single Phase)	Watts	Ship Weight	List Price+
	GRAHL-18	2	457 mm	240	470	4 kg	£313
1	GRAHL-24	2	610 mm	240	620	5 kg	326
	GRAHL-30	2	762 mm	240	780	5 kg	364
1	GRAHL-36	3	914 mm	240	980	6 kg	402
	GRAHL-42	3	1067 mm	240	1130	7 kg	437
1	GRAHL-48	4	1219 mm	240	1340	8 kg	477
	GRAHL-54	4	1372 mm	240	1490	9 kg	512
	GRAHL-60	5	1524 mm	240	1700	10 kg	563
	GRAHL-66	5	1676 mm	240	1860	10 kg	612
	GRAHL-72	6	1829 mm	240	2085	11 kg	683
	GRAHL-84	7	2134 mm	240	2470	13 kg	818
	GRAHL-96	8	2438 mm	240	2800	15 kg	922

Price includes cord and plug for GRAHL-18 through -72 (Cord and plug not available for GRAHL-84,-96 models).

Toggle Switch (max. 15 Amps) Location: Chef's left side - light side

(unless otherwise specified).

Dimensions: 457-1829 W x 229 D x 64 H mm.

OPTIONS AND ACCESSORIES – PAGE 23 Recommended mounting heights – Page 32

<u>GR A I</u>	<u> 1 L</u> - <u>xx</u>
Glo-Ray ————	Width (inches)
A = Aluminum Housing ——— No Character = Stainless	Lights No Character = No Lights
	H = High Watt

B

- A Stainless steel (single units without lights) or sturdy aluminum housings that do not sag, from 457 mm up to 1829 mm
- **B** Shatter-resistant incandescent lights (standard on GRAHL)
- **C** Heavy-duty insulation minimizes heat loss
- **D** Standard hanger tabs are provided
- **E** Aluminized reflector retains full heat intensity and directs more heat towards the edges of the holding surface
- ${\bf F}$ Long life metal-sheathed heating element
- **G** Protective reinforced wire guard supports heating element without affecting heat distribution



All Aluminum Models with Lights Feature:

GRAHL-48 with optional sneeze guard

💋 Stock Item 🖟	page 110
----------------	----------

OPTIONS (available at time of purchase only)

COLOR-6	152 mm housing for GRAH models	per 305 mm 🖇
COLOR-9	229 mm housing for GRAHL models	per 305 mm
	RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper BLACK Black WHITE White Granite GREEN Hunter Green Copper	
Gloss finishes. a	luminum models 457-1829 mm – Non-standard colors are non-returnable –	
GLOSS-6	152 mm housing for GRAH models	per 305 mm 🖇
GLOSS-9	229 mm housing for GRAHL models	per 305 mm
	RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black	
	GGOLD Gleaming Gold BBLUE Brilliant Blue	
CAP-EX	Attached 1829 mm Cord and Plug Set on models up to 1829 mm	
ND. LGT	Indicator Light (remote control only on stainless steel units)	
Extended Electr	ical Power Leads – Must specify lead length –	
LEADS5	305-1525 mm	£
LEADS10	1829-3048 mm	
LEADS15	3352-4572 mm	
LEADS20	4877-6096 mm	
Sneeze Guards -	- Aluminum models only –	
9.375BP1	238 mm – one side	per 305 mm
9.375BP2	238 mm – two sides	per 305 mm
14BP1	356 mm – one side	per 305 mm
14BP	356 mm – two sides	per 305 mm 1
IO BULB	No bulb option (GRAHL model only)	No Cha
IGHTS-ADD'L	Extra Lamps – Installed (max. two per 305 mm less one - one per 305 mm is standard)	
	(must be ordered with remote switches only)	each
ANEAL REFL	Bright Annealed Reflector for Lights	per 305 mm
nfinite Control -	- REMOTE ENCLOSURE RECOMMENDED (RMB)	
BLT INF	Built-In (max. of 12.2 Amps) – remote installation recommended	ş
	Enclosure (RMB)	
		31 for models and pri
AVAIIADIE III DESI	Adjustable Tubular Stands 254-356 mm (not available in <i>Designer</i> colors) – not available with cord –	1 pair £1
NTL-10, -12	Non-Adjustable Tubular Stands (specify 254 or 305 mm clearance) – not available with cord –	1 pair
NTL-14, -16	Non-Adjustable Tubular Stands (specify 254 of 565 mm clearance) – not available with cord –	1 pair
NTL-PAINT	Non-Adjustable Tubular Stand (specify <i>Designer</i> color or Gloss finish) – Non-standard colors are non-returnable –	add per pair
CL-HIGH	C-Leg Stands High Watt (343 mm clearance) – for models up to 1829 mm – only available with cord –	1 pair
L-13	T-Leg Stands (343 mm clearance) – for models up to 1829 mm – only available with cord –	1 pair 1
-		
FL-16	T-Leg Stands (406 mm clearance) – for models up to 1829 mm – only available with cord –	1 pair 2

ACCESSORIES see page 31 for illustrations

	GR-ANGLE	Adjustable Angle Brackets for GRH models only	1 pair	£17
~	ADJ ANGLE	Adjustable Angle Brackets for GRAH, GRAHL models only	1 pair	17
	ADJ ANGLE7	178 mm Adjustable Angle Bracket for GRAH, GRAHL models only	1 pair	19
	CHAIN 1	Chain Suspension	per 305 mm	5

COLORS AND FINISHES – INSIDE BACK COVER







Glo-Ray[®] Dual Infrared Strip Heaters

Create a deeper holding area with Glo-Ray[®] Aluminum Dual Infrared Strip Heaters mounted side-by-side, keeping hot food at optimum serving temperatures. The pre-focused heat pattern directs heat from a metal sheathed element across the entire holding surface. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Ensures maximum flavor, safety and holding time
- Provides even heat distribution no cold spots
- Sturdy extruded aluminum housings that do not sag, from 457 to 1829 mm
- Reflector does not blacken, maintaining a consistent heat pattern



- Long life metal-sheathed heating elements
- Reinforced wire guard provides operator safety without affecting heat distribution
- 76 or 152 mm spacer available
- Heavy-duty insulation minimizes
 heat loss
- Additional reflector styles and lower wattage elements available, consult factory for more information



GRAH-36D with standard 76 mm spacer

ALUMINUM DUAL STRIP HEATERS - HIGH WATT

					List	Price
		Voltage		Ship	76 mm	152 mm
Model	Width	Single Phase	Watts	Weight	Spacer	Spacer
GRAH-18D	457 mm	240	700	7 kg	£504	£513
GRAH-24D	610 mm	240	1000	8 kg	526	535
GRAH-30D	762 mm	240	1320	9 kg	575	590
GRAH-36D	914 mm	240	1600	10 kg	622	637
GRAH-42D	1067 mm	240	1900	11 kg	667	682
GRAH-48D	1219 mm	240	2200	13 kg	715	734
GRAH-54D	1372 mm	240	2500	14 kg	762	781
GRAH-60D	1524 mm	240	2800	16 kg	832	861
GRAH-66D	1676 mm	240	3120	18 kg	904	933
GRAH-72D 🗅	1829 mm	240	3450	19 kg	1010	1039
GRAH-84D 🗅	2134 mm	240	4100	23 kg	1167	1206
GRAH-96D 🗅	2438 mm	240	4800	24 kg	1307	1346
D Poquiros Por	nata Control Ra	v (DMP) coo poo	0.21			

GRAHL-72D with

and lights

optional Designer color,

standard 76 mm spacer

□ Requires Remote Control Box (RMB), see page 31.

All Aluminum Dual Models Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified). Leads: 152 mm pigtail leads – server's right.

Dimensions: with 76 mm Spacer (standard): 457-1829 W x 381 D x 64 H mm. with 152 mm Spacer: 457-1829 W x 457 D x 64 H mm.

ALUMINUM DUAL STRIP HEATERS WITH LIGHTS - HIGH WATT

						List I	Price
			Voltage		Ship	76 mm	152 mm
Model	Bulbs	Width	Single Phase	Watts	Weight	Spacer	Spacer
GRAHL-18D	2	457 mm	240	820	6 kg	£ 545	£ 554
GRAHL-24D	2	610 mm	240	1120	7 kg	570	579
GRAHL-30D	2	762 mm	240	1440	9 kg	634	649
GRAHL-36D	3	914 mm	240	1780	10 kg	692	707
GRAHL-42D	3	1067 mm	240	2080	11 kg	756	771
GRAHL-48D	4	1219 mm	240	2440	13 kg	815	834
GRAHL-54D	4	1372 mm	240	2740	15 kg	877	896
GRAHL-60D	5	1524 mm	240	3100	17 kg	964	993
GRAHL-66D	5	1676 mm	240	3420	18 kg	1049	1078
GRAHL-72D ^D	6	1829 mm	240	3810	19 kg	1172	1201
GRAHL-84D ^D	7	2134 mm	240	4520	21 kg	1360	1399
GRAHL-96D ^D	8	2438 mm	240	5280	25 kg	1531	1570


□ Requires Remote Control Box (RMB), see page 31.

All Aluminum Dual Models with Lights Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified). Leads: 152 mm pigtail leads – server's right.

Dimensions: with 76 mm Spacer (standard): 457-1829 W x 381 D x 64 H mm. with 152 mm Spacer: 457-1829 W x 457 D x 64 H mm.

OPTIONS AND ACCESSORIES – PAGE 25 Recommended mounting heights – Page 32

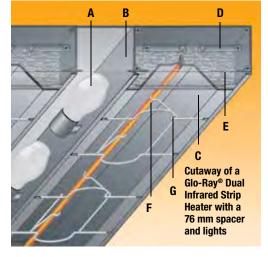

- **A** Shown with optional shatter-resistant incandescent lights
- **B** Sturdy extruded aluminum housings that do not sag, from 457 up to 1829 mm
- **C** Reflector does not blacken, maintaining a consistent heat pattern
- **D** Standard hanger tab is provided for under shelf or chain installation
- E Heavy-duty insulation minimizes heat loss
- **F** Long life metal-sheathed heating elements
- **G** Protective reinforced wire guard supports heating element without affecting heat distribution





A series of **GRAH-60D** models

OPTIONS (available at time of purchase only)

COLOR-15, -18									per 305 mm	22
	RED Black	Warm Red		Gray Granite White Granite		Navy Blue Hunter Green	COPPER	Antique Copper		
		nodels 457-1829								~
GLUSS-15, -18		and 457 mm hous							per 305 mm	£
	RRED	i la analite i lo a		Glossy Gray	BRLACK	Bold Black				
ND. LGT		Gleaming Gold		Brilliant Blue						<u> </u>
-		Light (Remote Cor								£
		Leads – Must sp	ecify lead	l length –						
LEADS5	305-152									£
LEADS10	1829-304									
LEADS15	3352-45									
EADS20	4877-609	96 mm								
neeze Guards –										
0.375BP1		 one side 							per 305 mm	
0.375BP2		 two sides 							per 305 mm	
4BP1		 one side 							per 305 mm	
14BP2		 two sides 							per 305 mm	1
O BULB		ption (GRAHL mod	.,						No Cl	
GHTS-ADD'L		nps – Installed (ma				305 mm is standa	ard)		each	
ANEAL REFL		nealed Reflector fo							per 305 mm	
ANEAL REFL	Bright Ani	nealed Reflector for	or Lights wi	th 152 mm Spac	er				per 305 mm	
emote Control E	nclosure	(RMB) —								
		and Gloss finishes	– Non-sta	ndard colors are i	non-returnal	ole –		See page 31	for models and p	oric
MB-ATT		ttaches control box								_
		ect RMB on page 3				,,				£
rl-D		e Tubular Stands 2			ls (not availa	ıble in <i>Designer</i> c	olors)		2 pair	2
TL-10-D, 12-D	Non-Adiu	stable Tubular Sta	nds for Dua	al models (specify	254 or 305	5 mm clearance)			2 pair	1
TL-14-D, 16-D	Non-Adju	stable Tubular Sta	nds for Dua	al models (specify	356 or 406	6 mm clearance)			2 pair	1
TL-PAINT-D		stable Tubular Sta							•	
	Non-stand	dard colors are no	n-returnab	le –					2 pair	
CCESSORII	ES see pa	age 31 for illustr	ations						•	
ADJ ANGLE-D		table Angle Brack							2 pair	£
ADJ ANGLE7-I		nm tall Adjustable	Angle Brad	ckets for Dual mo	dels				2 pair	
CHAIN 1	Chain	Suspension	-						per 305 mm	

COLORS AND FINISHES – INSIDE BACK COVER



Ultra-Glo[®] Ceramic Infrared Strip Heaters

Hatco Ultra-Glo[®] Ceramic Strip Heaters provide the ultimate holding power. Increased heights improve working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Available with or without lights, with attached or remote control box enclosure (RMB) (recommended). Units with lights must use a remote control box. Ideal for a fabricator who wants to incorporate a foodwarmer component into their final assembly.

- Pre-focused pyramidal heat pattern concentrates the heat at the edges where heat loss is greatest
- Increased height improves operational working clearances, giving the chef and server an improved ergonomic working environment
- Adaptable to many locations and configurations, including back-or front-of-the-house use, open kitchen concepts or buffet lines
- Optional coated shatter-resistant incandescent bulbs enhance product displays while safeguarding food from bulb breakage



UGAH-18 with optional Gloss finish – requires either attached or remote control box (RMB), not shown

ALUMINUM CERAMIC STRIP HEATERS – HIGH WATT (Standard Control Box includes toggle switch[es] and indicator light[s]) (CE Mark not available)

Model *	Width	Voltage Single Phase	Watts	Amps	Ship Weight∻	List Price +
UGAH-18	457 mm	240	650	2.7	4 kg	£457
UGAH-24	610 mm	240	750	3.1	5 kg	462
UGAH-30	762 mm	240	1125	4.7	5 kg	552
UGAH-36	914 mm	240	1300	5.4	5 kg	560
UGAH-42	1067 mm	240	1500	6.3	6 kg	646
UGAH-48	1219 mm	240	1950	8.1	6 kg	653
UGAH-54	1372 mm	240	2250	9.4	7 kg	744
UGAH-60	1524 mm	240	2600	10.8	8 kg	751
UGAH-66	1676 mm	240	2600	10.8	9 kg	836
UGAH-72	1829 mm	240	3000	12.5	9 kg	861

ALUMINUM CERAMIC STRIP HEATERS WITH LIGHTS – HIGH WATT (CE Mark not available)

Model*	Bulbs	Width	Voltage Single Phase	Watts	Amps	Ship Weight∻	List Price≭
UGAHL-18	1	457 mm	240	710	2.3	5 kg	£ 560
UGAHL-24	2	610 mm	240	870	3.2	6 kg	580
UGAHL-30	2	762 mm	240	1245	4.3	7 kg	675
UGAHL-36	3	914 mm	240	1480	4.9	8 kg	707
UGAHL-42	3	1067 mm	240	1680	5.8	8 kg	806
UGAHL-48	4	1219 mm	240	2190	7.3	9 kg	837
UGAHL-54	4	1372 mm	240	2490	7.3	10 kg	947
UGAHL-60	5	1524 mm	240	2900	9.6	10 kg	982
UGAHL-66	5	1676 mm	240	2900	9.6	11 kg	1090
UGAHL-72	6	1829 mm	240	3360	9.8	12 kg	1126

* CE Mark not available.

- Does not include Remote Control Enclosure (RMB).
- + Includes either attached control or Remote Control Enclosure with toggle switch(es) and indicator light(s).
- \star Units with lights will be supplied with Remote Control Enclosures, with toggle switches or without switches.

All Ceramic Models Feature:


Models Shipped with: Angle Brackets with 152 mm Leads.

- UGAH Dimensions with Remote Control Enclosure, Toggle and Indicator Light: 457-1829 W x 152 D x 64 H mm.
- UGAHL Dimensions with Remote Control Enclosure, Toggle and Indicator Light: 457-1829 W x 229 D x 64 H mm.

UGAH Dimensions with Attached Box: 457-1829 W x 251 D x 64 H mm.

OPTIONS – PAGE 28 Remote Boxes (RMB) – Page 31 Recommended mounting heights – Page 32



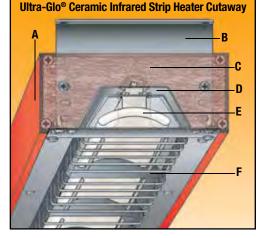

- A Sturdy aluminum housings that do not sag, widths from 457 up to 1829 mm in 152 mm increments
- **B** Adjustable standard mounting bracket (allows 3 different mounting heights and allows connection to end of the unit)
- **C** Heavy-duty insulation surrounds heating element to keep exterior housing cooler and minimize heat loss
- **D** Dual aluminized steel reflector keeps housing cooler, focuses more heat towards the food
- E Shape of element focuses the heat on the food
- **F** Protective wire guards under heating element






Ultra-Glo[®] Ceramic **Dual Infrared Strip Heaters**

Hatco Ultra-Glo® Ceramic Strip Heaters provide the ultimate holding power. Increased height improves working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Dual mounted Strip Heaters accommodate wider food holding areas. Ideal for a fabricator who wants to incorporate a foodwarmer component into their final assembly.

- Increased height improves operational working clearances, giving the chef and server an improved ergonomic environment to work
- Adaptable to any location and configuration, including back- or front-of-the-house use, open kitchen concepts or buffet lines
- Sturdy continuous aluminum housings
- Available in widths from 457 to 1829 mm
- Pre-focused heat pattern provides an increased pyramidal dimension, concentrating heat at the edges where heat loss is the greatest
- Remote Control Enclosure (RMB) with toggle switch, indicator lights and wiring for convenient control placement

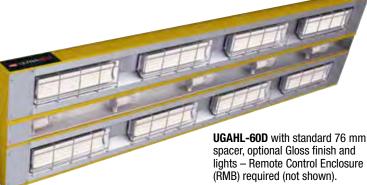

lights - Remote Control Enclosure

ALUMINUM DUAL CERAMIC STRIP HEATERS - HIGH WATT (Standard Control Box includes toggle switch[es]and indicator light[s]) (CE Mark not available)

		Voltage				
Model×	Width	Single Phase	Watts	Amps	Ship Weight*	List Price+
UGAH-18D	457 mm	240	1300	5.4	8 kg	£ 904
UGAH-24D	610 mm	240	1500	6.3	9 kg	942
UGAH-30D	762 mm	240	2250	9.4	10 kg	1148
UGAH-36D	914 mm	240	2600	10.8	11 kg	1182
UGAH-42D	1067 mm	240	3000	14.4	12 kg	1374
UGAH-48D	1219 mm	240	3900	16.2	14 kg	1409
UGAH-54D	1372 mm	240	4500	18.8	15 kg	1610
UGAH-60D	1524 mm	240	5200	26.0	17 kg	1650
UGAH-66D	1676 mm	240	5200	21.6	18 kg	1840
UGAH-72D	1829 mm	240	6000	25.0	20 kg	1914

ALUMINUM DUAL CERAMIC STRIP HEATERS WITH LIGHTS – HIGH WATT (CE Mark not available)

UGAHL-24D 2 610 mm 240 1620 6.8 9 kg 1014 UGAHL-30D 2 762 mm 240 2370 9.9 10 kg 1220 UGAHL-36D 3 914 mm 240 2780 11.6 11 kg 1256	•							
UGAHL-24D 2 610 mm 240 1620 6.8 9 kg 1014 UGAHL-30D 2 762 mm 240 2370 9.9 10 kg 1220 UGAHL-36D 3 914 mm 240 2370 9.9 10 kg 1220 UGAHL-36D 3 914 mm 240 2780 11.6 11 kg 1256 UGAHL-42D 3 1067 mm 240 3180 13.3 12 kg 1473 UGAHL-48D 4 1219 mm 240 4140 19.2 14 kg 1509 UGAHL-54D 4 1372 mm 240 4740 19.8 15 kg 1734 UGAHL-60D 5 1524 mm 240 5500 22.9 17 kg 1770 UGAHL-66D 5 1676 mm 240 5500 22.9 18 kg 1988	Model*	Bulbs	Width	•	Watts	Amps	Ship Weight	
UGAHL-30D2762 mm24023709.910 kg1220UGAHL-36D3914 mm240278011.611 kg1256UGAHL-42D31067 mm240318013.312 kg1473UGAHL-48D41219 mm240414019.214 kg1509UGAHL-54D41372 mm240474019.815 kg1734UGAHL-60D51524 mm240550022.917 kg1770UGAHL-66D51676 mm240550022.918 kg1988	UGAHL-18D	1	457 mm	240	1360	5.7	8 kg	£ 956
UGAHL-36D3914 mm240278011.611 kg1256UGAHL-42D31067 mm240318013.312 kg1473UGAHL-48D41219 mm240414019.214 kg1509UGAHL-54D41372 mm240474019.815 kg1734UGAHL-60D51524 mm240550022.917 kg1770UGAHL-66D51676 mm240550022.918 kg1988	UGAHL-24D	2	610 mm	240	1620	6.8	9 kg	1014
UGAHL-42D 3 1067 mm 240 3180 13.3 12 kg 1473 UGAHL-48D 4 1219 mm 240 4140 19.2 14 kg 1509 UGAHL-54D 4 1372 mm 240 4740 19.8 15 kg 1734 UGAHL-60D 5 1524 mm 240 5500 22.9 17 kg 1770 UGAHL-66D 5 1676 mm 240 5500 22.9 18 kg 1988	UGAHL-30D	2	762 mm	240	2370	9.9	10 kg	1220
UGAHL-48D 4 1219 mm 240 4140 19.2 14 kg 1509 UGAHL-54D 4 1372 mm 240 4740 19.8 15 kg 1734 UGAHL-60D 5 1524 mm 240 5500 22.9 17 kg 1770 UGAHL-66D 5 1676 mm 240 5500 22.9 18 kg 1988	UGAHL-36D	3	914 mm	240	2780	11.6	11 kg	1256
UGAHL-54D 4 1372 mm 240 4740 19.8 15 kg 1734 UGAHL-60D 5 1524 mm 240 5500 22.9 17 kg 1770 UGAHL-66D 5 1676 mm 240 5500 22.9 18 kg 1988	UGAHL-42D	3	1067 mm	240	3180	13.3	12 kg	1473
UGAHL-60D 5 1524 mm 240 5500 22.9 17 kg 1770 UGAHL-66D 5 1676 mm 240 5500 22.9 18 kg 1988	UGAHL-48D	4	1219 mm	240	4140	19.2	14 kg	1509
UGAHL-66D 5 1676 mm 240 5500 22.9 18 kg 1988	UGAHL-54D	4	1372 mm	240	4740	19.8	15 kg	1734
	UGAHL-60D	5	1524 mm	240	5500	22.9	17 kg	1770
UGAHL-72D 6 1829 mm 240 6360 26.5 20 kg 2066	UGAHL-66D	5	1676 mm	240	5500	22.9	18 kg	1988
	UGAHL-72D	6	1829 mm	240	6360	26.5	20 kg	2066

* CE Mark not available.

Does not include Remote Control Enclosure (RMB).

+ Includes either attached control or Remote Control Enclosure with toggle switch(es) and indicator light(s).

★ Units with lights will be supplied with Remote Control Enclosures, with toggle switches or without switches.

All Ceramic Dual Models Feature:

Models Shipped with: Angle Brackets and Leads (914 mm conduit whip).

Dimensions with Attached Control Box, Toggle and Indicator Light (UGAH only): 457-1829 W x 479 D x 64 H mm. Dimensions with Remote Control Enclosure, Toggle and Indicator Light: 457-1829 W x 381 D x 64 H mm.

OPTIONS - PAGE 28 RECOMMENDED MOUNTING HEIGHTS – PAGE 32



27





UGAH-42D with standard 76 mm spacer. Remote Control Enclosure (RMB) recommended (not shown)

OPTIONS (available at time of purchase only)

COLOR-6	152 mm housing for Single UGAH models (color selection below)	per 305 mm	£7
COLOR-9	229 mm housing for Single UGAHL models (color selection below)	per 305 mm	7
COLOR-15	381 mm housings for Dual UGAH, UGAHL madels (color selection below)	per 305 mm	2
	RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper		
	BLACK Black WHITE White Granite GREEN Hunter Green		
loss finishes, alumir	um models 457-1829 mm – Non-standard colors are non-returnable –		
GLOSS-6	152 mm housing for Single UGAH models (finish selection below)	per 305 mm	£
GLOSS-9	229 mm housing for Single UGAHL models (finish selection below)	per 305 mm	
GLOSS-15	381 mm housings for Dual UGAH, UGAHL models (finish selection below)	per 305 mm	
	RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black	por 000 mm	
	GGOLD Gleaming Gold BBLUE Brilliant Blue		
ogianor golara Dom	ote Control Enclosures (RMB) – Non-standard colors are non-returnable –		_
RMB-COLOR	Remote Control Housing in <i>Designer</i> color – Non-standard colors are non-returnable –		£
nivid-COLON	RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper		2
	BLACK Black WHITE White Granite GREEN Hunter Green		
			-
	e Control Enclosures (RMB) – Non-standard colors are non-returnable –		
RMB-GLOSS	Remote Control Housing in Gloss finish – Non-standard colors are non-returnable –		£
	RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black		
	GGOLD Gleaming Gold BBLUE Brilliant Blue		
IGHTS-ADD'L	Extra Lamps – Installed (max. two per 305 mm less one - one per 305 mm is standard) –	each s	£
GA-NTL-14, -16	Non-Adjustable Tubular Stands (specify 356 or 406 mm clearance)	1 pair	
GA-NTL-18, -20	Non-Adjustable Tubular Stands (specify 457 or 508 mm clearance)	1 pair	
GA-NTL-22, -24	Non-Adjustable Tubular Stands (specify 559 or 610 mm clearance)	1 pair	
GA-NTL-18-D, 20-D	Non-Adjustable Tubular Stands for Dual models (specify 457 or 508 mm clearance)	2 pair	
GA-NTL-22-D,	Non-Adjustable Tubular Stands for Dual models		
24-D, -26-D	(specify 559, 610 or 660 mm clearance)	2 pair	1
TL-PAINT	Designer color or Gloss finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	p	
TL-PAINT-D	Designer color or Gloss finish for Non-Adjustable Tubular Stands for Dual models		
	Non-standard colors are non-returnable –	2 pair	
vtondod Electrical D	ower Leads – extend beyond standard 914 mm conduit – Must specify lead length –		
HT-LEADS5	305-1524 mm		£
HT-LEADS10	1829-3048 mm		£
HT-LEADS15	3353-4572 mm		
HT-LEADS15	4877-6096 mm		
		No Ch	
MB-UGA MB-UGA-INF	Remote Control Enclosure with Toggle Control and Indicator (not available on 240V Dual models)	No Cha	đΠ
IND-UGA-INF	Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay and Indicator Light		
	(not available for 240V with lights) – <i>Designer</i> colors and Gloss finishes available		2

Strip Heaters

٩,

1





Glo-Ray® Infra-Black® Strip Heaters

For foodwarming at close range to food product, the Glo-Ray® Infra-Black[®] heat technology is ideal, emitting a solid panel of uniform heat. Sturdy continuous single or dual aluminum housings assure quality and durability with a variety of widths, depths, mounting arrangements and colors to fit your operation.

- Provides ideal amount of heat for limited space operations, mounted 102 to 254 mm above target surface for singles and 203 to 356 mm for duals
- Infra-Black emitter provides even heat distribution - eliminating hot spots
- Sturdy aluminum housings that do not sag, from 457 to 1829 mm in 152 mm increments
- Heavy-duty insulation keeps the exterior housing cool
- Optional wire guard available to protect user from incidental contact with the heated surface
- Optional 76 or 152 mm spacer available on dual models



ALUMINUM INFRA-BLACK STRIP HEATERS- HIGH WATT (Must specify and add price of RMB or TCBI)

Model	Width	Voltage Single Phase	Watts	Ship Weight ☆	List Price $^{ m O}$
GRAIH-18	457 mm	240	350	3 kg	£313 + RMB
GRAIH-24	610 mm	240	500	5 kg	334 + RMB
GRAIH-30	762 mm	240	660	6 kg	353 + RMB
GRAIH-36	914 mm	240	800	7 kg	373 + RMB
GRAIH-42	1067 mm	240	950	8 kg	394 + RMB
GRAIH-48	1219 mm	240	1100	10 kg	413 + RMB
GRAIH-54	1372 mm	240	1250	11 kg	432 + RMB
GRAIH-60	1524 mm	240	1400	12 kg	468 + RMB
GRAIH-66	1676 mm	240	1560	14 kg	508 + RMB
GRAIH-72*	1829 mm	240	1725	15 kg	578 + RMB

ALUMINUM DUAL INFRA-BLACK STRIP HEATERS – HIGH WATT (Must specify and add price of RMB or TCBI)

		Voltage		Ship	List Price $^{\bigcirc}$		
Model	Width	Single Phase	Watts	Weight \diamond	76 mm Spacer	152 mm Spacer	
GRAIH-18D	457 mm	240	700	6 kg	£ 732 + RMB	£ 741 + RMB	
GRAIH-24D	610 mm	240	1000	9 kg	771 + RMB	780 + RMB	
GRAIH-30D	762 mm	240	1320	10 kg	834 + RMB	849 + RMB	
GRAIH-36D	914 mm	240	1600	11 kg	901 + RMB	916 + RMB	
GRAIH-42D	1067 mm	240	1900	12 kg	963 + RMB	978 + RMB	
GRAIH-48D	1219 mm	240	2200	15 kg	1027 + RMB	1046 + RMB	
GRAIH-54D	1372 mm	240	2500	16 kg	1089 + RMB	1108 + RMB	
GRAIH-60D	1524 mm	240	2800	18 kg	1193 + RMB	1222 + RMB	
GRAIH-66D	1676 mm	240	3120	19 kg	1294 + RMB	1323 + RMB	
GRAIH-72D*	1829 mm	240	3450	21 kg	1455 + RMB	1484 + RMB	

^O Does not include Remote Control Box (RMB) or Thermostatic Control Box (TCBI). Must order either Thermostatic Control Box (see Options on page 30) or Remote Control Enclosure (see page 31).


- ✤ Does not include Remote Control Enclosure (RMB).
- * Not available with CE Mark

All Infra-Black Models Feature:


Leads: 152 mm pigtail leads - server's right.

Dimensions: GRAIH: 457-1829 W x 152 D x 64 H mm. **GRAIH-xxD with 76 mm Spacer:** 457-1829 W x 381 D x 64 H mm. GRAIH-xxD with 152 mm Spacer: 457-1829 W x 457 D x 64 H mm. TCBI Enclosure dimensions (not including switches): 203 W x 76 D x 64 H mm. TCBI Enclosure location: Chef's left side (unless otherwise specified).

OPTIONS AND ACCESSORIES – PAGE 30 RECOMMENDED MOUNTING HEIGHTS – PAGE 32

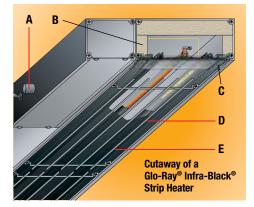

- A Thermostatically controlled to regulate heat and provide consistent temperature. (optional remote infinite control available)
- **B** Heavy-duty insulation minimizes heat loss
- C Provides ideal amount of heat for limited space operations, effectively holding product
- **D** Optional wire guard available to protect user from incidental contact with the heated surface
- E Infra-Black emitter provides even heat distribution, eliminating hot spots for close applications







Stock Item page 110

GRAIH-72 requires Remote Control Enclosure (RMB)


OPTIONS (available at time of purchase only)

COLOR-6	152 mm Housing for Single GRAIH models	per 305 mm £
COLOR-15, -18	381 mm and 457 mm Housings for Dual GRAIH models	per 305 mm
	RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper	r
	BLACK Black WHITE White Granite GREEN Hunter Green	
Gloss finishes, alui	ninum models 457-1829 mm – Non-standard colors are non-returnable –	
GLOSS-6	152 mm Housing for Single GRAIH models	per 305 mm £
GLOSS-15, -18	381 mm and 457 mm housings for Dual GRAIH models	per 305 mm
	RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black	
	GGOLD Gleaming Gold BBLUE Brilliant Blue	
Remote Control En	closure (BMB) -	
		for models and pric
TCBI	Thermostatic Control Box with Indicator Lights	£1
		05 mm (per side)
AIH4NTL	102 mm Non-Adjustable Tubular Stands	1 pair
AIH6NTL	152 mm Non-Adjustable Tubular Stands	1 pair
AIH8NTL	203 mm Non-Adjustable Tubular Stands (Dual models require two pair)	1 pair
AIH10NTL	254 mm Non-Adjustable Tubular Stands (Dual models require two pair)	1 pair
AIH12NTL-D	305 mm Non-Adjustable Tubular Stands for Dual models	2 pair 12
AIH14NTL-D	356 mm Non-Adjustable Tubular Stands for Dual models	2 pair 13
NTL-PAINT	Designer color or Gloss finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	1 pair
NTL-PAINT-D	Designer color or Gloss finish for Non-Adjustable Tubular Stands for Dual models	i puil
	Non-standard colors are non-returnable	2 pair
Extended Electrica	Power Leads – extend beyond standard 152 pigtail leads – Must specify lead length –	- F • · · ·
HT-LEADS5	305-1524 mm	£
HT-LEADS10	1829-3048 mm	Z /
HT-LEADS10	3353-4572 mm	
HT-LEADS20	4877-6096 mm	
ITT-LEAD320		
HUGEJJUKIE	S see page 31 for illustrations	
ADJ ANGLE	Adjustable Angle Brackets for Single models	1 pair £
ADJ ANGLE7	178 mm Adjustable Angle Bracket for Single models	1 pair ~
ADJ ANGLE-D	Adjustable Angle Brackets for Dual models	2 pair
	178 mm tall Adjustable Angle Brackate for Dual models	2 pair

•	ADJ ANULE	Aujustable Aligie Diackets für Siligie Houels	i µaii	Z1/			
	ADJ ANGLE7	178 mm Adjustable Angle Bracket for Single models	1 pair	19			
	ADJ ANGLE-D	Adjustable Angle Brackets for Dual models	2 pair	34			
	ADJ ANGLE7-D	178 mm tall Adjustable Angle Brackets for Dual models	2 pair	38			
	CHAIN 1	Chain Suspension	per 305 mm	5			
C	COLORS AND FINISHES – INSIDE BACK COVER						



Glo-Ray[®] Mounting Arrangements





Non-Adjustable Tubular Stands

Sturdy stands conceal all supply wiring. Available in Designer colors. Duals require two pair. Specify power location. (not available on Infra-Black models)



Adjustable Tubular Stands Sturdy tubular stands conceal all supply wiring. Duals require two pair (not available on Ultra-Glo models). Specify power location.

254 to 356 mm



25 mm

Special adjustable angle brackets fit 152 or 229 mm housings for mounting Glo-Ray under a shelf. Provides 25-51 mm space or 25-152 mm space between Glo-Ray and overshelf. Duals require two pair. (standard on Ultra-Glo models).

27 mm 152 mm 60 or 178 mm



Chain Suspension

Chains attach to tabs provided with warmers and are available in various lengths to suit the location. (not available on Ultra-Glo models).



C-Leg Stands

RMB-14QE-CE

Attractive plated legs allow easy relocation of the warmer. For models 1829 mm or less in width (not available on Ultra-Glo and Infra-Black models). Requires attached cord and plug.

T-Leg Stands

Provide rigid stability and allow for more passthrough area below unit. For models 1829 mm or less in width (not available on Ultra-Glo and Infra-Black models). Requires attached cord and plug.

343, 406, 457

Remote Control Enclosures (RMB)

Hatco Remote Control Enclosures are built for toggle or infinite switches, indicator lights and wiring, ready for installation when purchased with Glo-Ray[®] Foodwarmers.

- Built for toggle or infinite switches, indicator lights and wiring
- Threaded rubber boot for toggle switch is standard
- One RMB per Strip Heater



RMB-7DE-CE with toggle switches and optional Designer color

RMBS				
Model	Description	Voltage Single Phase	Width	List Price≆
RMB-3CE-CE	1 infinite switch	240	140 mm	£132
RMB-3DE-CE	1 toggle switch	240	140 mm	101
RMB-3EE-CE	2 toggle switches	240	140 mm	111
RMB-3HE-CE	1 toggle switch 1 indicator light	240	140 mm	111
RMB-7CE-CE	2 infinite switches	240	229 mm	200
RMB-7DE-CE	3 toggle switches	240	229 mm	148
RMB-7HE-CE	1 infinite switch 1 indicator light	240	229 mm	154
RMB-7KE-CE	2 toggle switches 2 indicator lights	240	229 mm	147
RMB-7NE-CE	1 toggle switch 1 infinite switch	240	229 mm	159
RMB-7QE-CE	1 toggle switch 1 infinite switch 1 indicator light	240	229 mm	169
RMB-14FE-CE	4 infinite switches	240	356 mm	324
RMB-14EE-CE	4 toggle switches	240	356 mm	160
RMB-14KE-CE	3 toggle switches 3 indicator lights	240	356 mm	180
DUD 44NE OF		0.10	050	

RMB-14YE-CE 1 toggle switch 2 infinite switches Pricing applies only at time of equipment purchase.

RMB-14NE-CE 2 infinite switches 2 indicator lights

All Models Feature:

Ship Weight: 1-3 kg depending on components.

Max. allowable amperage per switch: Toggle: 15.0, Infinite: 12.2 Dimensions (not including switches): 140, 229 or 356 W x 76 D x 64 H mm

2 toggle switches 2 infinite switches

240

240

240

infinite controls

RMB-3HE-CE with toggle

switch and indicator light

1

230

236

233

356 mm

356 mm

356 mm

OPTIONS (available at time of purchase only)

Toggle Switch: Max. 15 Amps Infinite Switch: Max. 12.2 Amps

Remote Control Enclosures: When used, no

more than one RMB per Strip Heater and no

Choose Remote Box (RMB) can be found on:

www.hatcocorp.com under Resource

more than one Strip Heater per RMB.

	rnable –	Non-standar g <i>ner</i> color Ren			£25
RED	Warm Red	NAVY	Nav	y Blue	
BLACK	Black	GREE	Hun	ter Green	
GRAY	Gray Grani	te COPPI	R Anti	que Copper	
WHITE	White Grar	ite			
on-retu	rnable –	o n-standard s finish Remote			£39
GGOLD		d GGRAY Gold BBLA(


UK Price List Telephone: 01509 260 140 hatcocorp.com



July 1, 2019

Strip Heater Recommended Range Above Target* and Spacing Requirements

(Based on 610 mm Foodwarmer)

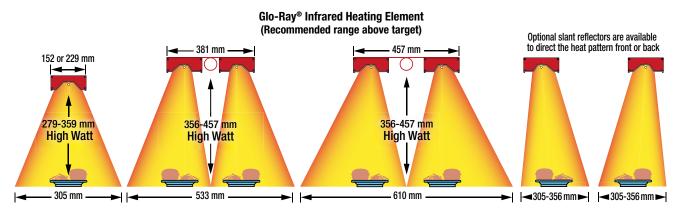

GLO-RAY® INFRARED HEATING ELEMENT


Singles (GRH, GRAH, GRAHL) -

Combustibles: 343 mm below, 25 mm above and 76 mm to back wall. Non-combustibles: 25 mm above, 254 mm below with infinite or indicator lamp and 203 mm below toggle. Must be installed in a passthrough area. Units with remote switches may be installed against a non-combustible back wall, flush to an overshelf and 203 mm to a surface below. Maximum 254 mm setback from the front of an overshelf. Models with cords must be installed 76 mm below an overshelf and 297 mm over a surface below.

> Ultra-Glo[®] Heating Element (Recommended range above target)

Duals (GRAH-D, GRAHL-D) -

May not be installed in combustible surroundings. Non-combustibles: 25 mm above, 254 mm below. Must be installed in a pass-through area. Units with remote switches may be installed 76 mm from a non-combustible back wall, 203 mm to surface below and flush to an overshelf. Maximum 254 mm setback from the front of an overshelf.

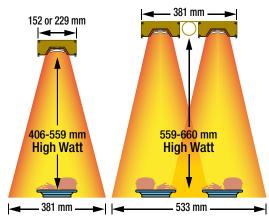

ULTRA-GLO®


Singles and Duals: (UGAH, UGAHL, UGAH-D, UGAHL-D) – May not be installed in combustible surroundings. Non-combustibles: 25 mm above, 432 mm from a surface below and 76 mm from a back wall.

Dual Mounting: Do not mount warmers side by side (dual mounting) with less than a 76 mm space between units.

Remote Control Enclosures (RMB): When used, no more than one RMB per Strip Heater and no more than one Strip Heater per RMB.

DEPTH OF HEAT PATTERN AT RECOMMENDED ELEMENT HEIGHT

* Recommended single unit application without base heat, based on ideal conditions. Individual applications may vary, consult factory.

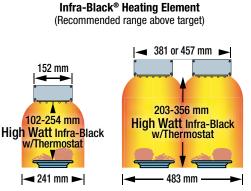

GLO-RAY® INFRA-BLACK®

(GRAIH, GRAIH-D) -

May not be installed in combustible surroundings. Non-combustibles: 25 mm above and 102 mm below. Must be installed in a pass-through area. Units with remote switches may be installed 76 mm from a non-combustible back wall and flush to an overshelf. Maximum 254 mm setback from the front of an overshelf.



-3624-2 models only)

are non-returnable

 Sneeze guard is removable for easy cleaning (DCSB400-R24-1, -2420-1,

• The heated simulated stone bases are

made of foodsafe materials and come

in three colors - Non-standard colors

• Units come with matching cutting board

juices contained and tablecloths clean

(except DCS400-1, -1CM), keeping

• DCS400-1 has a 18 kg weighted

base, perfect for buffet use



Decorative Carving Stations

Decorative Carving Stations provide proper food serving temperatures plus combine the Hatco Decorative Heat Lamp with a simulated stone Heated Base to create an attractive carving display. Perfect for chef stations in restaurants, hotels, country clubs, casinos and any catered events.

DCS400-1CM with optional Bright Brass post and optional Bermuda Sand trim ring



- Available as post mount, permanent counter mount or freestanding with a rounded or rectangular heated simulated stone base (DCS400-1, -1CM do not have bases)
- The patented telescoping heated decorative lamp has a 30° shade pivot
- Decorative posts and shades are available in three Plated Finishes – Non-standard colors are non-returnable
- Heated base is controlled by an adjustable thermostat and power switch
- Models with simulated stone are Swanstone[®]



DCSB400-3624-2 with standard Night Sky base and standard Bright Nickel posts and shades



DECORATIVE CARVING STATIONS

beconarrye canving stations								
Model	No. of Lamps	Width	Heated Base Surface Area	Voltage Single Phase	Watts	Ship Weight	List Price	
DCS400-1	1	203 mm	-	230	230	15 kg	£1006	
DCS400-1CM	1	156 mm	-	230	230	9 kg	985	
DCSB400-R24-1	1	660 mm	610 mm diameter	230	580	35 kg	2451	
DCSB400-2420-1	1	610 mm	610 W x 508 D mm	230	730	48 kg	2451	
DCSB400-3624-2	2	914 mm	914 W x 610 D mm	230	1259	70 ka	3565	

All Decorative Carving Station Models Feature:

Models Ship with: DCS400-1, -1CM: One clear coated bulb. DCS400-1 includes black base.

DCSB400-R24-1, -2420-1: One clear coated bulb, base heat, glass sneeze guard and cutting board. DCSB400-3624-2: Two clear coated bulbs, base heat, glass sneeze guard and cutting board.

Telescoping Clearance: DCS400-1, -1CM: Bottom of shade to counter: 406 - 711 mm.

DCSB400-R24-1, -2420-1, -3624-2: Bottom of shade to top of cutting board: 356 - 660 mm. Cord Location: DCS400-1: Base of unit, server side center.

DCS400-1CM: Under counter.

DCSB400-R24-1, -2420-1, 3624-2: Base of unit, server side on left.

OPTIONS (available at time of purchase only)

Shade and post(s) in Plated Finish, no additional charge – Non-standard colors are non-returnable – Bright Nickel Standard –					
BNICKEL	Bright Nickel	Standard			
BBRASS	Bright Brass	No Charge			
ABRONZE	Antique Bronze	No Charge			
no additional cha		,			
	lors are non-returnable – N				
GGRAN	Gray Granite	No Charge			
BSAND	Bermuda Sand	No Charge			

NSKY	Night Sky	Standard
Trim Ring (DC	S400-1CM only) in simulated	stone, no additional charge
– Non-standa	rd colors are non-returnable	– Night Sky Standard –
GGRAN	Gray Granite	No Charge

uunan	Giay Giallite	NU Ullarye
BSAND	Bermuda Sand	No Charge
NSKY	Night Sky	Standard

Decorative Carving Station B = Heated Base B XXX - XX - X CM

No Character = No Base Heat

Shade Style Number Width of Heated Base (inches) (R = Round Heated Base) No Character = Freestanding CM = Countertop Mount

Quantity Overhead Heat Lamps Depth of Heated Base (inches) (Diameter for Round Headed Base)



Close-up of **Trim Ring** in Standard Night Sky (Unit shown in Optional Plated Antique Bronze finish)





Glo-Ray® Carving Stations

An excellent addition to extend food holding times during serving periods is the Glo-Ray® Carving Station. Create a complete serving station for buffets by adding it to Hatco's Flav-R-Savor® Holding Cabinet.

- Overhead ceramic heating elements project high intensity radiant heat over entire target area
- Adjustable clearance of 445 to 570 mm
- Portable includes a 1829 mm cord and plug
- Shatter-resistant incandescent lights illuminate holding area
- Drip pan and cutting board available

GRCSCLH-24 controls

• GRCSCLH has base heat



GRCSCL-24 with accessory left-hand sneeze guard, drip pan and cutting board

Gl

GLO-RAY CARVING STATIONS							
Model	Dimensions W◆ x D x H	Voltage Single Phase	Watts	Ship Weight	List Price		
GRCSCL-24	660 x 711 x 572-724 mm	240	990	26 kg	£2403		
GRCSCLH-24	660 x 711 x 572-724 mm	240	1290	26 kg	2711		
 Width includes accessory 	 ♦ Width includes accessory left-hand sneeze guard. 						

GRCSCLH-24 with accessory


and cutting board

left-hand sneeze guard, drip pan

All Carving Station Models Feature:

Models Shipped with: Right-hand sneeze guard. Cord Location: Back side on base.









Portable Foodwarmers

Opt for the versatility of Hatco's Glo-Max®, Glo-Ray® and Ultra-Glo® Portable Foodwarmers. With heat from above, below or both, these foodwarmers offer design flexibility without sacrificing food product quality. Ideal for use next to fry stations, drive-through windows and service areas that require frequent and easy access.

- Portable ready to plug in and use
- Versatile available in many sizes, styles and heat sources to fit your needs
- Flexible both top and bottom heat available
- Available with incandescent bulbs containing special protective coating to guard against food contamination
- Ceramic heating elements provide more distance between the heat source and the holding pan (UGFF series only)
- Toggle switch is standard; infinite switch optional on GRFF series
- All base heat units (GR-B, GRFFB and UGFFB) have a preset automatic thermostat to maintain consistent temperatures
- GMFFL provides top heat only



Stock Item page 110

GL	GLO-MAX PORTABLE FOODWARMER WITH METAL SHEATHED ELEMENTS							
	Model	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Ship Weight	List Price		
~	GMFFL	329 x 644 x 445 mm	230	610	10 kg	£240		
	All Metal Sheathed Portable Models Feature: Model Shipped with: 1829 mm cord and plug, base front sign holder and clear plastic insert for sign holder.				TIONS (available			

Cord Location: Back, upper middle.

urchase only)

Designer colors, No Additional Charge - Non-standard colors are non-returnable - Black standard Warm Red No Charge RED BLACK Black Standard

GLO-RAY PORTABLE FOODWARMERS WITH METAL SHEATHED ELEMENTS							
Model	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Ship Weight	List Price		
GR-B	324 x 559 x 57 mm	240	250	7 kg	£417		
GRFF	314 x 610 x 400 mm	240	500	7 kg	398		
GRFFL	314 x 610 x 400 mm	240	620	8 kg	506		
GRFFB+	324 x 610 x 406-508 mm	240	750	12 kg	624		
GRFFBL*	324 x 610 x 406-508 mm	240	870	14 kg	735		

+ Standard clearance is 356 mm. Specify 306 or 406 mm if required.

GR-B Heated Base with accessory sheet pan

All Metal Sheathed Portable Models Feature:

Models Shipped with: 1829 mm cord and plug. Cord Location: GR-B, GRFFB, GRFFBL: Back, lower middle. GRFF, GRFFL: Back, upper middle.

OPTIONS AND ACCESSORIES – PAGE 36

ULTRA-GLO PORTABLE FOODWARMERS WITH CERAMIC ELEMENTS

Model	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Ship Weight	List Price
UGFF	314 x 565 x 479 mm	240	750	7 kg	£492
UGFFL	314 x 565 x 479 mm	240	870	9 kg	603
UGFFB	324 x 572 x 559 mm	240	1000	12 kg	733
UGFFBL	324 x 572 x 559 mm	240	1120	14 kg	844

All Ceramic Portable Models Feature:

Models Shipped with: 1829 mm cord and plug.

Cord Location: UGFF, UGFFL: Back, upper middle. UGFFB, UGFFBL: Back, lower middle.

OPTIONS AND ACCESSORIES – PAGE 36

xx FF B GR = Glo-Ray . L = Incandescent Light GM = Glo-Max No character = No Light UG = Ultra-Glo B = Base Heat No character = No Base Heat French Frv





OPTIONS (available at time of purchase only) (excludes GMFFL)

Designer colors (one color per unit, heated base is not painted, excludes GR-B models) Non-standard colors are non-returnable – RED Warm Red Warm Red £96 BLACK Black 96 GRAY Gray Granite 96 WHITE White Granite 96 NAVY Navy Blue 96 GREEN 96 Hunter Green COPPER 96 Antique Copper Gloss Finishes (one color per unit, heated base is not painted, excludes GR-B models) Non-standard colors are non-returnable -RRED Radiant Red £153 GGOLD **Gleaming Gold** 153 GGRAY Glossy Gray 153 BBLUE Brilliant Blue 153 BBLACK 153 Bold Black Clearance from bottom of Glo-Ray to top of heated surface (GRFFB, GRFFBL only) -No Charge Standard 305 mm 356 mm No Charge 406 mm SIGN HOLD Sign Holder for GRFFL model with Back Toggle only (requires 229 W x 140 H x 2 D mm sign, not included) - Adds 76 mm to height of unit £29 INF Infinite Control (not available on GR-B, GMFFL, UGFF, UGFFL, UGFFB or UGFFBL models) 39 ACCESSORIES 5PLTBOX Five-Pleat Hardcoated French Fry Box Ribbon - 489 W x 235 D x 51 H mm £131 8PLTBAG Eight-Pleat Hardcoated French Fry Bag Ribbon – 489 W x 235 D x 51 H mm 131

FRY RIBBONS – PAGE 38 COLORS AND FINISHES – INSIDE BACK COVER





Glo-Ray[®] Fry Stations

Hatco offers convenient Glo-Ray[®] Fry Stations that can be placed where they are most needed – next to a fryer! Glo-Ray heat technology offers the ability to keep fried foods at optimum temperatures, ready to serve, without cooking or drying them out.

- Various hardcoated fry ribbons stage boxed or bagged products for quick-service areas
- Thermostatically-controlled heated base maintains uniform holding temperatures from below (GRFHS series)
- Portable models including pass-through style (GRFHS series)
- Ceramic elements and slotted holding bin prevent soggy product (GRFHS series)
- Accessory hardcoated fry ribbons absorb more radiant heat than stainless steel and can be up to 8° to 11°C hotter (GRFHS series)
- Sectional divider permits holding of multiple products simultaneously (GRFHS series)
- Fry Station Warmers (GRFSC, GRFS series) feature a built-in top heat source and a swing-away post mount
- GRFSC series available with ceramic heating element, while the GRFS series has a metal sheathed element
- A variety of clearances are offered (GRFS series)
- GRFS series has power toggle switch, cord and plug, plus optional infinite control

GRFHS-21 with optional righthand cutout for fry basket and accessory fry ribbon (lefthand cutout also available)









GLO-RAY PORTABLE FRY HOLDING STATIONS

	Model	Bulbs	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price
	GRFHS-16 ⁺	2	416 x 559 x 564 mm	240	1090	24 kg	£1979
V	GRFHS-21 ⁺	2	543 x 724 x 578 mm	240	1200	29 kg	2175
	GRFHS-26 ⁺	2	672 x 595 x 578 mm	240	1200	30 kg	2232
	GRFHS-PT26*	2	759 x 570 x 625 mm	240	1440	29 kg	2232
	GRFHS-PT26▼■	2	759 x 570 x 625 mm	240	1440	29 kg	2313
	GRFHS-PTT21*	2	578 x 965 x 630 mm	240	1740	45 kg	2269

^{*} Subtract 52 mm from width if ordering without Scoop Holder.

Scoop Holder standard.

Includes a built-in 152 mm deep heated food holding base (102 mm is standard on all other models).

All Fry Holding Station Models Feature:

Models Shipped with: One slotted holding bin and one sectional divider.

Cord location: GRFHS-16, -21, -26, -PT26: Back side, lower right corner.

GRFHS-PTT21: Lower right-hand side.

GLO-RAY FRY STATION WARMERS

		Dimensions	Voltage		Ship	
Model	Bulbs	W x D x H	Single Phase	Watts	Weight	List Price
GRFSC-18 ^D	-	152 x 457 x 489-572 mm	240	750	5 kg	£441
GRFSCL-18 ^D	2	229 x 457 x 489-572 mm	240	870	6 kg	526
GRFSCR-18 ^{1†}	-	152 x 457 x 489-572 mm	240	750	5 kg	441
GRFSCLR-18 ¹	2	229 x 457 x 489-572 mm	240	870	6 kg	526
GRFS-24*	-	152 x 610 x 318-394 mm	240	500	5 kg	362
GRFSL-24*	2	229 x 610 x 318-394 mm	240	620	6 kg	455
GRFSR-24* [†]	-	152 x 610 x 318-394 mm	240	500	5 kg	362
GRFSLR-24* [†]	2	229 x 610 x 318-394 mm	240	620	6 kg	455



GRFS, GRFSL, GRFSC and **GRFSCL** with swing-away post mount and cord with plug

^D Specify clearance of 305, 425, 457 (standard) or 508 mm when ordering.

⁺ Fry Station Warmer without cord and plug. Supply wires through mounting post.


* Specify clearance of 254, 279, 305 or 330 mm (standard) when ordering.


All Fry Station Warmer Models Feature:

Toggle Switch Location: Ceramic Heating Element Models: Back of unit. Metal Sheathed Heating Element Models: Front of unit.

Cord Location: GRFS-24 and GRFSL-24: Back, upper middle.


OPTIONS AND ACCESSORIES – PAGE 38






UK Price List Telephone: 01509 260 140 hatcocorp.com



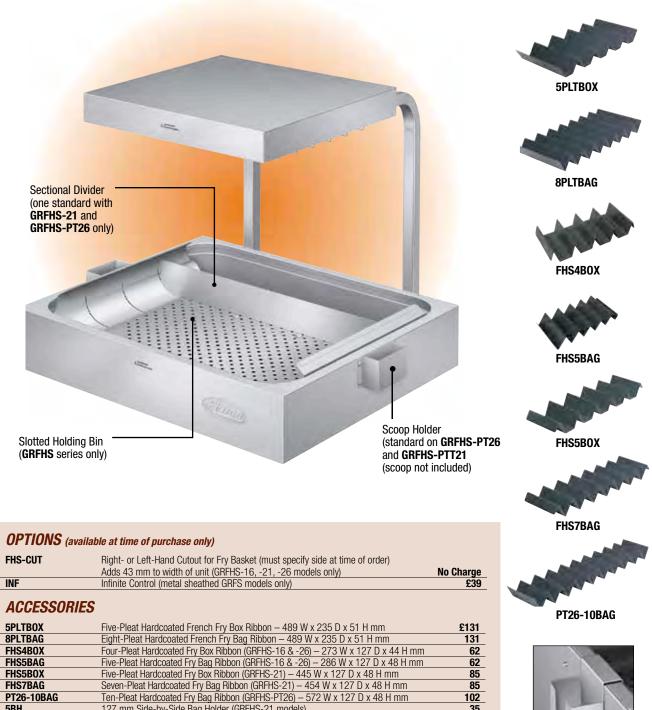



FHS-SH





Portable Lamp Warmer

The Portable Hatco Lamp Warmer has a specially designed stand that keeps food holding pans above the countertop and provides insulation to extend holding times.

- Features two vented lamps with heavy-duty sockets
- Adjustable stand from 619 to 772 mm in height
- Cord and plug with in-line power switch
- Holds food pans, wire trivets and fry ribbons



PORTABLE LAMP WARMER						
Model•	No. of Bulbs	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price
LW-2	2	314 x 548 x 619-772 mm	240	544	8 kg	£453

When no color is specified, color will be Gray Granite.

All Lamp Warmer Models Feature:

Bulbs: Two, 250 watt clear bulbs, uncoated.

Cord location: Back of adjustable stand near top.

Lamp Distance: 267 x 419 mm space from bottom of lamp to base.

OPTIONS (available at time of purchase only)

Designer colo	rs – Non-standard colors are non-returnabl	e – Gray Granite standard –
RED	Warm Red	No Charge
BLACK	Black	No Charge
GRAY	Gray Granite	Standard
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

ACCESSORIES

WHITE-CTD-240250 Watt Clear Bulb, 240V, Coated (unit accommodates 2 bulbs)each £71

FRY RIBBONS – PAGE 38

<u>LW</u> - <u>x</u>						
Lamp Warmer	Quantity of Heat Lamps					



Portable Round Heated Shelves

The contemporary-styled Portable Round Heated Shelf keeps hot food at serving temperatures. Ideal when used for wrapped product or for use behind a sneeze guard with unwrapped food like pizza, biscuits, muffins and cookies.

- Unit is designed for countertop or built-in use see cutout dimensions below
- Uniform heat distribution with blanket-type element
- Thermostatically-controlled heated base
- Available in three sizes to hold standard 381, 432 or 483 mm diameter pans

GRSR-19 with optional

Designer Hunter Green

and accessory pizza pan

- Lighted power switch with cord and plug attached
- Optional stainless steel trim available



GRSR-17 with optional *Designer* Navy Blue and accessory food pan

PORTABLE ROUND HEATED SHELVES

Model	Dimensions Dia. x H	Voltage Single Phase	Watts	Ship Weight	List Price
GRSR-15	425 x 98 mm	240	250	8 kg	£611
GRSR-17	476 x 98 mm	240	325	9 kg	646
GRSR-19	527 x 98 mm	240	400	10 kg	681

All Round Heated Shelf Models Feature: Maximum Pan Size: GRSR-15 = 381 mm di

e:	GRSR-	15 =	381	mm	diam	eter
	GRSR-	·17 =	432	mm	diam	eter

GRSR-19 = 483 mm diameter

Cord Location: Underneath.

OPTIONAL PORTABLE ROUND HEATED SHELVES COUNTERTOP CUTOUT DIMENSIONS

Model	Minimum Diameter	Maximum Diameter	Below Counter
GRSR-15	410 mm	413 mm	137 mm
GRSR-17	460 mm	464 mm	137 mm
GRSR-19	511 mm	514 mm	137 mm

OPTIONS (available at time of purchase only)

SS SIDE	Stainless Steel Side	No Charge
Designer colors	- Non-standard colors are non-returnat	ble – Black standard –
RED	Warm Red	No Charge
BLACK	Black	Standard
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge



	GRSR-xx
Glo-Ray ——— Heated Shelf ——	Max. Pan Size (inches) Bound

Hatco

Glo-Ray[®] Portable Round Heated Simulated Stone Shelves

Hatco's Glo-Ray[®] Portable Heated Simulated Stone Shelves are made of foodsafe materials and are offered in three colors. These unique warmers will safely hold food hot while blending in with your décor and are ideal for buffet lines or as hors d'oeuvre displays.

- Blanket-type element creates uniform heat across the entire simulated stone surface
- Features a lighted rocker switch and thermostatically-controlled heated base to help hold your food hot and delicious
- Optional 76 or 127 mm Risers available in stainless steel (standard) or *Designer* Colors
- Models with simulated stone are Swanstone[®]

GRSSR-18 in standard Night Sky simulated stone with optional 127 mm Riser in *Designer* color



GRSSR20-DL77516 in standard Night Sky simulated stone with standard *Designer* Black base and lamp

GRSSR-20 in standard Night Sky simulated stone

GLO-RAY PORTABLE ROUND HEATED SIMULATED STONE SHELVES						
Model	Dimensions Dia. x H	Voltage Single Phase	Watts	Ship Weight	List Price	
GRSSR-16	406 x 67 mm	240	250	6 kg	£784	
GRSSR-18	457 x 67 mm	240	325	7 kg	836	
GRSSR-20	508 x 67 mm	240	400	8 kg	886	

All Portable Round Heated Simulated Stone Shelf Models Feature:

Temperature Range: 38°- 93°C.

Cord Location: Back side on base.

GRSSR-16 in standard Night Sky simulated stone with optional 76 mm Riser in *Designer* color

7 Stock Item page 110

GLO-RAY PORTABLE ROUND HEATED SIMULATED STONE SHELF WITH DECORATIVE LAMP						
Model	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price	
✓ GRSSR20-DL77516	508 x 572 x 914 mm	240	650	15 kg	£1295	


The Portable Round Heated Simulated Stone Shelf with Decorative Lamp Models Features: Bulb: One, 250 watt clear bulb, uncoated.

Temperature Range: 38°- 93°C.

Cord Location: Back side on base.

Lamp Distance: 415 mm space from bottom of shade to base.

OPTIONS AND ACCESSORIES – PAGE 42

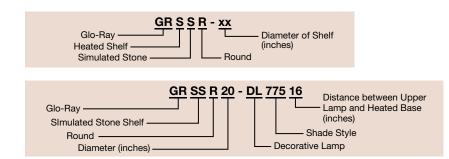



July 1, 2019



Two **GRSSR20-DL77516** units in optional Gray Granite simulated stone and standard *Designer* Black Base and Shade

OPTIONS (available at time of purchase only)

RED	Warm Red	No Charge
BLACK	Black	Standard
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge
Simulated stone	color – Non-standard colors are non-returnable – Night Sky standard –	
SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge
SS-NSKY	Night Sky	Standard
	vailable in Designer colors and stainless steel	
	the GRSSR20-DL77516) – Non-standard colors are non-returnable –	
3RISER16	GRSSR-16	630
		£38
	GRSSR-18	
3RISER18	00,022,00	
3RISER20	GRSSR-20	38 38
3RISER20	GRSSR-20 Available in Designer colors and stainless steel	38
3RISER20 127 mm Risers –		38
3RISER20 127 mm Risers –	Available in Designer colors and stainless steel	38 £50
3RISER20 127 mm Risers – (not available on	Available in Designer colors and stainless steel the GRSSR-DL77516) – Non-standard colors are non-returnable –	
3RISER20 127 mm Risers – (not available on 5RISER16	Available in Designer colors and stainless steel the GRSSR-DL77516) – Non-standard colors are non-returnable – GRSSR-16	£50 50
3RISER20 127 mm Risers – (not available on 5RISER16 5RISER18	Available in Designer colors and stainless steel the GRSSR-DL77516) – Non-standard colors are non-returnable – GRSSR-16 GRSSR-18	£50 50
3RISER20 127 mm Risers – (not available on 5RISER16 5RISER18	Available in Designer colors and stainless steel the GRSSR-DL77516) – Non-standard colors are non-returnable – GRSSR-16 GRSSR-18 GRSSR-20	£50

Glo-Ray[®] Portable Rectangular Heated Simulated Stone Shelves

Match the heat zone to your countertops with Hatco's Glo-Ray[®] Heated Simulated Stone Shelves. The portable foodsafe shelves come in three colors and are ideal for buffet lines or as hors d'oeuvre displays. These unique warmers will safely hold food hot while blending in with your décor.

- Hatco Heated Simulated Stone Shelves are made of approved foodsafe materials
- Features a lighted rocker switch and thermostatically-controlled heated base to help hold your food hot and delicious
- Models with simulated stone are Swanstone®



GRSS-3618 in optional Bermuda Sand simulated stone (view of base)



GLO-RAY PORTABLE RECTANGULAR HEATED SIMULATED STONE SHELVES

	Dimensions	Voltage			
Model	W x D x H	Single Phase	Watts	Ship Weight	List Price
GRSS-2418	610 x 457 x 64 mm	240	635	13 kg	£1167
GRSS-3018	762 x 457 x 64 mm	240	780	14 kg	1220
GRSS-3618	914 x 457 x 64 mm	240	930	16 kg	1272
GRSS-4818+	1219 x 457 x 159 mm	240	1270	21 kg	1372
GRSS-6018+	1524 x 457 x 159 mm	240	1560	26 kg	1750
GRSS-7218*	1829 x 457 x 159 mm	240	1860	31 kg	1852

+ Height includes standard 102 mm legs.

All Portable Rectangular Heated Simulated Stone Shelf Models Feature:

Cord Location: Center of side with switch.

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Night Sky standard –					
SS-GGRAN	Gray Granite	No Charge			
SS-BSAND	Bermuda Sand	No Charge			
SS-NSKY	Night Sky	Standard			

GR S S - xx xx					
Glo-Ray ——————	Depth of Shelf (inches)				
Heated Shelf —	Width of Heated				
Simulated Stone —	Surface (inches)				



Portable Rectangular Heated Base Glass Shelves

The Hatco Heated Base Glass Shelves have an approved foodsafe heated ceramic glass top which creates uniform heat across the entire surface. Adjustable thermostatic controls allow surface temperature ranging from 38° to 90°C to be controlled easily.

- Shelves are made of approved foodsafe materials
- Lighted On/Off rocker switch
- Equipped with a trim mounting ring that is available in stainless steel (standard) *Designer* Black or White
- All units come with a 1829 mm cord and plug



HBG-FS-24 Black angled Food Stop (detail view) with HBG-TRIM-BLK optional *Designer* Black trim ring



Black Glass and stainless steel trim ring

HBG-2418 with Optional White Glass, Frame and Trim Ring

PORTABLE RECTANGULAR HEATED BASE GLASS SHELVES

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price
HBG-2418	619 x 467 x 64 mm	240	425	14 kg	£1676
HBG-3018	772 x 467 x 64 mm	240	525	15 kg	1751
HBG-3618+	924 x 467 x 156 mm	240	630	17 kg	1827
HBG-4818 ⁺ ≈	1229 x 467 x 156 mm	240	850	19 kg	1979
HBG-6018 ⁺ ≈	1534 x 467 x 156 mm	240	1050	28 kg	2129
HBG-7218 ⁺ ≈	1838 x 467 x 156 mm	240	1260	31 kg	2281

+Height includes standard 102 mm legs.

[≈] Units 1219 mm and larger are constructed of two equal size pieces of glass which create a seam.

All Portable Heated Base Glass Shelf Models Feature:

Cord Location: Center of side with switch.

OPTIONS (available at time of purchase only) Ceramic Glass Color – Black standard HBG-GLASS-BLK Black (standard) No Charge HBG-GLASS-WHT White Angled Food Stop keeps product on the heat zone – Choose size/color 610 mm HBG-FS-24 Designer Black HBG-FSW-24 White each \$107 672 mm HBG-FS-30 Designer Black HBG-FSW-30 White each 128 914 mm HBG-FS-36 Designer Black HBG-FSW-36 White each 149 1219 mm HBG-FS-48 Designer Black HBG-FSW-48 White 170 each 1524 mm HBG-FS-60 Designer Black HBG-FSW-60 White each 191 HBG-FS-72 Designer Black HBG-FSW-72 White 1829 mm 212 each Trim Ring – Stainless Steel standard HBG-TRIM-BLK Designer Black \$35 HBG-TRIM-WHT White Frame (base) color - Black standard - Non-standard colors are non-returnable -No Charge HBG-FRAME-BLK Designer Black HBG-FRAME-WHT White

COLORS AND FINISHES – INSIDE BACK COVER

Portable



Portable Heated Base Glass Modular Shelf

Hatco's black ceramic glass creates uniform heat across the entire top surface. The new design uses a modular system, so units can be placed side-by-side. This allows great flexibility in buffet areas. Each unit's glass surface is the size of a 1/1 GN food pan.

- Electronic temperature control with five settings for 55°, 65°, 75°, 85° and 95°C
- The portable, modular system design offers great flexibility
- Simple design for easy cleaning and maintenance
- Durable stainless steel housing





					🌝 Stoc	k Item page 110
PC	ORTABLE HEATE	D BASE GLASS MODULA	AR SHELF			
	Madal	Dimensions	Valtana	14/2442	Chin Wainht	Link Duine
	Model	W x D x H	Voltage	Watts	Ship Weight	List Price
~	HGSM-4060	400 x 600 x 58 mm	230	300	8 kg	£406

The Portable Heated Base Glass Modular Shelf Model Features: Cord Location: Left back of unit.





Glo-Ray[®] Portable Heated Shelves

Whether you need a heated workspace or extra base heat in a pass-through or buffet area, Hatco's full line of Glo-Ray[®] Heated Shelf options can help you. Using a blanket heating element for an even temperature, the thermostaticallycontrolled base safely extends the holding time of your food.

Flexibility, style and quality mark these workhorses of the buffet.

- Uniform heat distribution with blankettype element
- Built-in adjustable thermostat controls surface temperature
- Extruded aluminum base with stainless steel top optional hardcoated aluminum surface
- Optional 102 mm legs (standard on 914 mm and wider models)

GRS-30-I in optional *Designer* color with accessory food pans shown below a **GRAH-36** Strip Heater in optional *Designer* color with infinite switch and accessory C-leg stands

- Optional slant leg kit and pan rail
- Model widths from 457 to 1829 mm
- Model depths: 152, 197, 248, 305, 349, 394, 400, 445, 495, 546, 597 and 648 mm



GLO-RAY PORTABLE HEATED SHELVES

	Dimensions	Voltage Single		Ship	List		Dimensions	Voltage Single		Ship	List
Model	W x H	Phase	Watts	Weight	Price	Model	WxH	Phase	Watts	Weight	Price
495 mm dept	h – Standard 495 mr	n Depth ac	commoda	tes 305 x 50)8 mm					-	
	steam table pans					305 mm depth					
GRS-18-I	457 x 57 mm	240	272	7 kg	£608	GRS-18-D	457 x 57 mm	240	218	5 kg	£507
GRS-24-1	610 x 57 mm	240	381	9 kg	655	GRS-24-D	610 x 57 mm	240	272	6 kg	542
GRS-30-I	762 x 57 mm	240	490	11 kg	709	GRS-30-D	762 x 57 mm	240	327	8 kg	574
GRS-36-I	914 x 133 mm	240	599	13 kg	754	GRS-36-D	914 x 133 mm	240	381	9 kg	601
GRS-42-I	1067 x 133 mm	240	653	15 kg	838	GRS-42-D	1067 x 133 mm	240	490	10 kg	666
GRS-48-I	1219 x 133 mm	240	762	16 kg	885	GRS-48-D	1219 x 133 mm	240	544	12 kg	700
GRS-54-I	1372 x 133 mm	240	871	19 kg	939	GRS-54-D	1372 x 133 mm	240	599	13 kg	729
GRS-60-I	1524 x 133 mm	240	980	20 kg	985	GRS-60-D	1524 x 133 mm	240	653	15 kg	761
GRS-66-I	1676 x 133 mm	240	1089	23 kg	1034	GRS-66-D	1676 x 133 mm	240	708	16 kg	793
GRS-72-I	1829 x 133 mm	240	1198	25 kg	1082	GRS-72-D	1829 x 133 mm	240	762	17 kg	821
152 mm dept	h			Ū		349 mm depth					
GRS-18-A	457 x 57 mm	240	109	5 ka	£439	GRS-18-E	457 x 57 mm	240	218	6 kg	£525
GRS-24-A	610 x 57 mm	240	136	5 kg	456	GRS-24-E	610 x 57 mm	240	272	7 kg	558
GRS-30-A	762 x 57 mm	240	163	6 kg	471	GRS-30-E	762 x 57 mm	240	327	9 ka	596
GRS-36-A	914 x 133 mm	240	191	7 kg	489	GRS-36-E	914 x 133 mm	240	381	10 kg	632
GRS-42-A	1067 x 133 mm	240	245	9 kg	542	GRS-42-E	1067 x 133 mm	240	490	11 kg	700
GRS-48-A	1219 x 133 mm	240	272	9 kg	558	GRS-48-E	1219 x 133 mm	240	544	13 kg	739
GRS-54-A	1372 x 133 mm	240	299	10 kg	572	GRS-54-E	1372 x 133 mm	240	599	14 kg	774
GRS-60-A	1524 x 133 mm	240	327	11 kg	585	GRS-60-E	1524 x 133 mm	240	653	15 kg	809
GRS-66-A	1676 x 133 mm	240	354	12 kg	600	GRS-66-E	1676 x 133 mm	240	708	17 kg	837
GRS-72-A	1829 x 133 mm	240	381	13 kg	615	GRS-72-E	1829 x 133 mm	240	762	18 kg	880
197 mm dep	th			0		394 mm depth					
GRS-18-B	457 x 57 mm	240	109	5 ka	£467	GRS-18-F	457 x 57 mm	240	218	6 ka	£537
GRS-24-B	610 x 57 mm	240	136	5 kg	491	GRS-24-F	610 x 57 mm	240	272	8 kg	574
GRS-30-B	762 x 57 mm	240	163	6 kg	520	GRS-30-F	762 x 57 mm	240	327	10 kg	612
GRS-36-B	914 x 133 mm	240	191	7 kg	542	GRS-36-F	914 x 133 mm	240	381	11 kg	648
GRS-42-B	1067 x 133 mm	240	245	9 kg	594	GRS-42-F	1067 x 133 mm	240	490	13 kg	729
GRS-48-B	1219 x 133 mm	240	272	9 kg	612	GRS-48-F	1219 x 133 mm	240	544	15 kg	768
GRS-54-B	1372 x 133 mm	240	299	10 kg	634	GRS-54-F	1372 x 133 mm	240	599	17 kg	809
GRS-60-B	1524 x 133 mm	240	327	11 kg	655	GRS-60-F	1524 x 133 mm	240	653	18 kg	852
GRS-66-B	1676 x 133 mm	240	354	12 kg	676	GRS-66-F	1676 x 133 mm	240	708	19 kg	885
GRS-72-B	1829 x 133 mm	240	381	13 kg	706	GRS-72-F	1829 x 133 mm	240	762	20 kg	925
248 mm dept						400 mm depth				- 0	
GRS-18-C	457 x 57 mm	240	136	5 kg	£488	GRS-18-G	457 x 57 mm	240	245	6 ka	£542
GRS-24-C	610 x 57 mm	240	191	5 kg	£400 515	GRS-24-G	610 x 57 mm	240	327	8 kg	578
GRS-30-C	762 x 57 mm	240	245	6 kg	513	GRS-30-G	762 x 57 mm	240	408	10 kg	617
GRS-30-C	914 x 133 mm	240	245	7 kg	568	GRS-36-G	914 x 133 mm	240	400	11 kg	655
GRS-42-C	1067 x 133 mm	240	327	9 kg	627	GRS-42-G	1067 x 133 mm	240	572	13 kg	744
GRS-48-C	1219 x 133 mm	240	381	9 kg	648	GRS-48-G	1219 x 133 mm	240	653	15 kg	778
GRS-54-C	1372 x 133 mm	240	436	9 kg 10 kg	670	GRS-54-G	1372 x 133 mm	240	735	17 kg	821
GRS-60-C	1524 x 133 mm	240	430	11 kg	709	GRS-60-G	1524 x 133 mm	240	817	18 kg	862
GRS-66-C	1676 x 133 mm	240	544	12 kg	709	GRS-66-G	1676 x 133 mm	240	898	19 kg	905
GRS-72-C	1829 x 133 mm	240	599	12 kg	754	GRS-72-G	1829 x 133 mm	240	980	20 kg	939
uno-72-0	1020 × 100 11111	270	000	10 Ky	7.04			210	000	20 119	505

GR S - xx	(- X
Glo-Ray	Depth of Unit
	I = 495 mm D = 305 mm
Heated Shelf	A = 152 mm E = 349 mm
	B = 197 mm F = 394 mm
Width of Model (inches)	C = 248 mm G = 400 mm

46



Glo-Ray® Portable Heated Shelves

continued...

GRS-60-I



GRS-30-I in optional *Designer* color with accessory pan rail and food pans

GLO-RAY PORTABLE HEATED SHELVES

Model	Dimensions W x H	Voltage Single Phase	Watts	Ship Weight	List Price
445 mm depth					
GRS-18-H	457 x 57 mm	240	245	7 kg	£568
GRS-24-H	610 x 57 mm	240	327	9 kg	607
GRS-30-H	762 x 57 mm	240	408	11 kg	648
GRS-36-H	914 x 133 mm	240	490	12 kg	700
GRS-42-H	1067 x 133 mm	240	572	14 kg	784
GRS-48-H	1219 x 133 mm	240	653	16 kg	827
GRS-54-H	1372 x 133 mm	240	735	18 kg	872
GRS-60-H	1524 x 133 mm	240	817	20 kg	925
GRS-66-H	1676 x 133 mm	240	898	21 kg	968
GRS-72-H	1829 x 133 mm	240	980	23 kg	1008
546 mm depth					
GRS-18-J	457 x 57 mm	240	327	9 kg	£ 632
GRS-24-J	610 x 57 mm	240	408	12 kg	691
GRS-30-J	762 x 57 mm	240	490	14 kg	744
GRS-36-J	914 x 133 mm	240	572	15 kg	796
GRS-42-J	1067 x 133 mm	240	735	16 kg	885
GRS-48-J	1219 x 133 mm	240	817	17 kg	943
GRS-54-J	1372 x 133 mm	240	898	20 kg	998
GRS-60-J	1524 x 133 mm	240	980	22 kg	1052
GRS-66-J	1676 x 133 mm	240	1062	24 kg	1110
GRS-72-J	1829 x 133 mm	240	1143	26 kg	1164

		Voltage			
	Dimensions	Single		Ship	List
Model	W x H	Phase	Watts	Weight	Price
597 mm depth					
GRS-18-K	457 x 57 mm	240	354	9 kg	£ 666
GRS-24-K	610 x 57 mm	240	463	12 kg	725
GRS-30-K	762 x 57 mm	240	572	14 kg	778
GRS-36-K	914 x 133 mm	240	681	15 kg	837
GRS-42-K	1067 x 133 mm	240	817	16 kg	939
GRS-48-K	1219 x 133 mm	240	925	17 kg	998
GRS-54-K	1372 x 133 mm	240	1034	20 kg	1056
GRS-60-K	1524 x 133 mm	240	1143	22 kg	1120
GRS-66-K	1676 x 133 mm	240	1252	24 kg	1180
GRS-72-K	1829 x 133 mm	240	1361	26 kg	1235
648 mm depth					
GRS-18-L	457 x 57 mm	240	381	9 kg	£ 676
GRS-24-L	610 x 57 mm	240	517	12 kg	739
GRS-30-L	762 x 57 mm	240	653	15 kg	797
GRS-36-L	914 x 133 mm	240	789	17 kg	863
GRS-42-L	1067 x 133 mm	240	898	20 kg	985
GRS-48-L	1219 x 133 mm	240	1034	23 kg	1035
GRS-54-L	1372 x 133 mm	240	1171	25 kg	1116
GRS-60-L	1524 x 133 mm	240	1307	27 kg	1180
GRS-66-L	1676 x 133 mm	240	1443	29 kg	1230
GRS-72-L	1829 x 133 mm	240	1579	31 kg	1295

All Portable Heated Shelves Feature:

Pan Capacity (305 x 508 mm): GRS-18-I, -24-I = 1-pan

GRS-30-I, -36-I = 2-pan

GRS-42-I,	-48-I = 3-pan
-----------	----------------------

GRS-54-	I, -60-I =	4-pan
---------	------------	-------

GRS-66-I, -72-I = 5-pan

Cord location: Center of side with controls.

Y

OPTIONS (available at time of purchase only)

	(top surface not painted) – Non-standard colo Clear Anodized Standard –	rs are
RED	Warm Red	£116
BLACK	Black	116
GRAY	Gray Granite	116
WHITE	White Granite	116
NAVY	Navy Blue	116
GREEN	Hunter Green	116
COPPER	Antique Copper	116

Hardcoated Surface in lieu of stainless steel on standard 495 mm deepGRS models only (please consult factory for pricing of other depths)HC 18-42GRS-18 through GRS-42HC 48-72GRS-48 through GRS-72GRS-RECTHThermostat GuardNo Charge

COLORS AND FINISHES – INSIDE BACK COVER

GR S - xx	(- x
Glo-Ray	L Depth of Unit
Heated Shelf	H = 445 mm K = 597 mm
Width of Model (inches)	J = 546 mm L = 648 mm

ACCESSORIES

GRS-LEGS	102 mm Adjustable Legs	
	(standard on units GRS-36 and large	er) £45
GRS-SLANT	Slant Leg Kit for models 305 mm de	ep or deeper 35
Pan Rail for	r 495 mm deep GRS models –	
2 RAIL	2-Pan	£113
3 RAIL	3-Pan	122
4 RAIL	4-Pan	227
5 RAIL	5-Pan	235
	3 RAIL	GRS-SLANT



Glo-Ray® Mini-Merchandisers

Hatco's convenient Mini-Merchandisers create impulse sales by placing fresh product in front of customers. Using a limited amount of valuable counterspace, these flexible warmers come in a variety of shapes, sizes and colors to hold food samples, hors d'oeuvres and packaged product.

- Ideal for delis, supermarkets, kiosks, convenience stores or concession stands where counterspace is limited
- Sturdy acrylic sneeze guard safeguards food serving areas
- Shatter-resistant incandescent lights enhance product displays while safeguarding food from bulb breakage
- Lighted rocker switch for easy On/Off
- Thermostatically-controlled heated base to extend holding times of most foods
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
 - 102 mm food bins are standard (GRHW-1SG only)



accessory food pans



GLO-RAY MINI-MERCHANDISERS

Model	Bulbs	Dimensions W x D x H Includes sneeze guard	Usable Heated Shelf Space W x D	Voltage Single Phase	Watts	Ship Weight	List Price
GRHW-1P	2	565 x 414 x 451 mm	533 x 349 mm	240	820	16 kg	£1172
GRHW-2P	4	1098 x 414 x 527 mm	1067 x 349 mm	240	1640	31 kg	1540
GRHW-1SG	2	565 x 414 x 467 mm	533 x 349 mm	240	820	17 kg	1456

All Mini-Merchandiser Models Feature:

Included with Merchandiser: Thermostatically-controlled base, 191 mm sneeze guard, display lights,

25 mm rubber legs (except GRHW-2P has 102 mm legs), five 102 mm bins (GRHW-1SG only) and 1829 mm cord and plug.

Cord Location: Base end plate, same side as switch.

OPTIONS (available at time of purchase only)

Designer (Colors – Non-standard (colors are non-returnable – Clear Anodized
Aluminum	Standard –	
RED	Warm Red	£27

NED	Wallineu	2215
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279
PANEL	Plexi-Glass side panels	58

ACCESSORIES

4" LEGS 102 mm Adjustable Legs (standard on GRHW-2P) £45









Glo-Ray[®] Buffet Warmers

Hold hot food at optimum serving temperatures on buffet lines or at temporary serving areas with Hatco Glo-Ray[®] Buffet Warmers. Choose from either standard or *Designer* style models in many widths to fit your operation.

- Available with *Designer* color insets with the choice of an entire unit in color as well
- Thermostatically-controlled heated base of 27°-93°C extends holding times of most foods
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Sturdy plexi-glass sneeze guard
- Shatter-resistant incandescent lights enhance product displays while safeguarding food from bulb breakage
- Available in a variety of widths from 635-1988 mm



GRBW-30 with optional *Designer* Color and accessory food pans



GR2BW-30 with optional *Designer* Red inset panels and accessory food pans



GR2BW-30 in optional *Designer* color with plexiglass side enclosures and accessory food pans

GLO-RAY BUFFET WARMERS

Model	No. of Light Bulbs	Dimensions W x D x H Includes sneeze guard	Maximum Pan Capacity 305 x 508 mm pan	Voltage Single Phase	Watts	Ship Weight	List Price
GRBW-24	2	638 x 572 x 451 mm	1	240	1000	21 kg	£1278
GRBW-30	2	761 x 572 x 451 mm	2	240	1270	24 kg	1411
GRBW-36	3	943 x 572 x 527 mm	2	240	1578	26 kg	1544
GRBW-42	3	1095 x 572 x 527 mm	3	240	1728	31 kg	1668
GRBW-48	4	1248 x 572 x 527 mm	3	240	2040	35 kg	1807
GRBW-54	4	1400 x 572 x 527 mm	4	240	2360	37 kg	1928
GRBW-60	5	1553 x 572 x 527 mm	4	240	2680	41 kg	2066
GRBW-66	5	1705 x 572 x 527 mm	5	240	2948	44 kg	2195
GRBW-72	5	1857 x 572 x 527 mm	5	240	3113	49 kg	2319

All Buffet Warmer Models Feature:

GRBW Base Dimensions: 638-1857 W x 495 D mm. **Cord Location:** Base end plate, same side as switch.

GLO-RAY DESIGNER BUFFET WARMERS

Model [•]	No. of Light Bulbs	Dimensions W x D x H Includes sneeze guard	Maximum Pan Capacity 305 x 508 mm pan	Voltage Single Phase	Watts	Ship Weight	List Price
GR2BW-24	2	768 x 686 x 483 mm	1	240	970	34 kg	£2246
GR2BW-30	2	921 x 686 x 483 mm	2	240	1230	39 kg	2460
GR2BW-36	2	1073 x 686 x 483 mm	2	240	1470	44 kg	2670
GR2BW-42	4	1226 x 686 x 559 mm	3	240	1790	50 kg	2955
GR2BW-48	4	1378 x 686 x 559 mm	3	240	2040	57 kg	3233
GR2BW-54	4	1530 x 686 x 559 mm	4	240	2290	59 kg	3571
GR2BW-60	6	1683 x 686 x 559 mm	4	240	2660	70 kg	3909
GR2BW-66	6	1835 x 686 x 559 mm	5	240	2920	77 kg	4190
GR2BW-72*	6	1988 x 686 x 559 mm	5	240	3185	84 kg	4460

• When no color is specified, color inset panels and corner caps will be black.

Cord without plug.

All Designer Buffet Warmer Models Feature:

Usable Heated Shelf Space: Width of unit minus 165 x 552 D mm. Cord location: Center of bottom on control side.

OPTIONS AND ACCESSORIES – PAGE 50







OPTIONS (available at time of purchase only)

Designer Colors - Non-	standard	d colors are non-re	turnable –	Clear anodized	l Aluminum	Standard –	5	£279
	RED	Warm Red	BLACK	Black	COPPER	Antique Copper		
	GRAY	Gray Granite	WHITE	White Granite				
	NAVY	Navy Blue	GREEN	Hunter Green				
Designer Inset Panel co	olors, GR	2BW models – Blad	k standar	d – Non-standa	rd colors ar	e non-returnable –	No Ch	arg
	RED	Warm Red	BLACK	Black	COPPER	Antique Copper		
	GRAY	Gray Granite	WHITE	White Granite				
	NAVY	Navy Blue	GREEN	Hunter Green				
Designer Corner Caps, (GR2BW n	nodels – Black sta	ndard – No	on-standard col	lors are non	-returnable –	No Ch	arg
	BLACK	Black (Standard)	DKGRAY	Dark Gray				
Acrylic Front and two S	Side Encl	osures in lieu of Sı	neeze Guar	ds – (GRBW-24	30, -36, -4	12, -48 models only)		
FRTENCL-24, -30		0 models		· · · ·	, , ,	,	1	£25
FRTENCL-36, -42, -48	-36,-42	2, -48 models						29
SIDE-ENCL	Two Acr	vlic Side Enclosures	(GRBW mod	tels only)			1	£16
SIDE-ENCL2	Two Acr	ylic Side Enclosures	(GR2BW mo	odels only)				16
Hardcoated Surface, GR	RBW mod	iels –	•					
HC 24-42		24 through GRBW-42	2				1	£ 9
HC 48-72		48 through GRBW-72						18
INF	Infinite (Control for top heat or	ly (GRBW-24	4 through -60 and	d GR2BW-24	through -60 models only)		£3
9.375BP	238 mn	n Sneeze Guard in lie	u of standa	rd 191 mm (GRB	W models on	ly)	add per 305 mm per side	
14BP	356 mn	n Sneeze Guard in lie	u of standa	rd 191 mm			add per 305 mm per side	1
ACCESSORIES								
GRBW-LEGS	102 mn	n Adjustable Legs for	GRBW-24	models (standard	l on GRBW-3	6 or larger)		£4
						W /		

2SD-LEGS 102 m	m Designer Legs for GR2BW-24 models (standard on GR2BW-30 or larger)	63
Pan Rail for GRBW models (not	t for use with Acrylic Front Enclosure)	
2 RAI	L 2-pan	£113
3 RAI	L 3-pan	122
4 RAI	L 4-pan	227
5 RAI	L 5-pan	235







Cold Simulated Stone Shelves Built-In with unattached Control **Panel only**

These shelves are a must for buffet lines in cafeterias, restaurants and much more! The sturdy, foodsafe shelves have the benefit of allowing fabricators the freedom to design

- Condensing unit not included
- Thermal break reduces condensation and temperature transfer (patent-pending)
- Self-adhesive silicone gasket included
- Both CSSBX and CSSBFX models are bottom mount units, flush with countertop
- Models with simulated stone are Swanstone[®]

NOTE: Models are not a CE offering, items are sold as components for fabricator

Width

619 mm

772 mm

924 mm

1229 mm

619 mm

619 mm

619 mm

924 mm

924 mm

924 mm

1229 mm

1229 mm

1229 mm

Width

242 mm

th 10 mm radi

Depth

467 mm

467 mm

467 mm

467 mm

403 mm

505 mm

619 mm

403 mm

505 mm

619 mm

403 mm

505 mm

619 mm

Height

197 mm

with 10 mm radii

COUNTERTOP CUTOUT DIMENSIONS



Bermuda Sand simulated stone



self certification.

Model

CSSBX-2418

CSSBX-3018

CSSBX-3618

CSSBX-4818

CSSBFX-24-F

CSSBFX-24-I

CSSBFX-24-S

CSSBFX-36-F

CSSBFX-36-I CSSBFX-36-S

CSSBFX-48-F

CSSBFX-48-I CSSBFX-48-S

Model

Control Box

COLD SIMULATED STONE SHELVES BUILT-IN WITH UNATTACHED CONTROL PANEL ONLY (flush to countertop)

Model *	Usable Space W x D	Watts	Approximate Ship Weight	List Price
CSSBX-2418	607 x 457 mm	17	35 kg	£3065
CSSBX-3018	762 x 457 mm	17	40 kg	3106
CSSBX-3618	914 x 457 mm	17	46 kg	3242
CSSBX-4818	1219 x 457 mm	17	53 kg	3852

* Not available with CE Mark. All models utilize R-404A Refrigerant.

All Cold Simulated Stone Shelf Built-In models with Unattached Control Panel only feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (assembled).

COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP WITH UNATTACHED CONTROL PANEL ONLY


Model *	Usable Space W x D	Watts	Approximate Ship Weight	List Price
CSSBFX-24-F	610 x 394 mm	17	32 kg	£3057
CSSBFX-24-I	610 x 495 mm	17	36 kg	3073
CSSBFX-24-S	610 x 610 mm	17	41 kg	3212
CSSBFX-36-F	914 x 394 mm	17	45 kg	3225
CSSBFX-36-I	914 x 495 mm	17	50 kg	3242
CSSBFX-36-S	914 x 610 mm	17	56 kg	4040
CSSBFX-48-F	1219 x 394 mm	17	45 kg	3831
CSSBFX-48-I	1219 x 495 mm	17	56 kg	3851
CSSBFX-48-S	1219 x 610 mm	17	64 kg	4730

* Not available with CE Mark. All models utilize R-404A Refrigerant.

All Cold Simulated Stone Shelf Built-In Flush Top models with unattached Control Panel only feature: Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (assembled).

OPTIONS – PAGE 52





Hot/Cold Shelves **Built-In with** unattached Control Panel only

Give your operation ultimate flexibility with these patented shelves. Available in our signature Aluminum Hardcoat or in simulated stone, they easily transition between a heated to cold and cold to heated shelf!

They have the benefit of allowing fabricators the freedom to design.

- Condensing unit not included
- Thermal break reduces condensation and temperature transfer (patent-pending)
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change for different day parts
- Simulated stone models (HCSSBFX, HCSSBX) are bottom mount, flush with counter top
- Models with simulated stone are Swanstone[®]
- Self-adhesive silicone gasket included with HCSSB(F) X models
- Hardcoat aluminum models (HCSBFX) are top mount
- The flush mount control comes standard with a 1219 mm lead wire continued on next page ...



HCSSBX-4818 in optional Bermuda Sand simulated stone

in standard Night Sky

NOTE: Models are not a CE offering, items are sold as components for

Width

619 mm

772 mm

924 mm

1229 mm

619 mm

619 mm

619 mm

921 mm

921 mm

921 mm

1226 mm

1226 mm

<u>1226 mm</u> Width

372 mm

with 10 mm radii with 10 mm radii

fabricator self certification.

COUNTERTOP CUTOUT DIMENSIONS

Model

HCSSBX-2418

HCSSBX-3018

HCSSBX-3618

HCSSBX-4818

HCSSBFX-24-F

HCSSBFX-24-I

HCSSBFX-24-S

HCSSBFX-36-F

HCSSBFX-36-I

HCSSBFX-36-S

HCSSBFX-48-F

HCSSBFX-48-I

HCSSBFX-48-S

Control Box

Model

HCSSBFX-48-S simulated stone

Depth

467 mm

467 mm

467 mm

467 mm

403 mm

505 mm

619 mm

403 mm

505 mm

619 mm

403 mm

505 mm 619 mm

Height

197 mm

HOT/COLD SIMULATED STONE SHELVES BUILT-IN WITH UNATTACHED CONTROL PANEL ONLY (flush to countertop)

Model *	Usable Space W x D	Hot Side Watts 220V, 230V, 240V	Approx. Ship Weight	List Price
HCSSBX-2418	607 x 457 mm	371, 405, 441	35 kg	£3650
HCSSBX-3018	762 x 457 mm	467, 510, 555	48 kg	3826
HCSSBX-3618	914 x 457 mm	558, 610, 664	57 kg	4087
HCSSBX-4818	1219 x 457 mm	746, 815, 887	64 kg	4511
		I'I' D AGAA D C'		

* Not available with CE Mark. All models utilize R-404A Refrigerant.

All Hot/Cold Simulated Stone Shelf Built-In Remote models with unattached Control Panel only feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probes, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (assembled).

HOT/COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP WITH UNATTACHED CONTROL PANEL ONLY

Model *	Usable Space W x D	Hot Side Watts 220V, 230V, 240V	Approx. Ship Weight	List Price
HCSSBFX-24-F	610 x 394 mm	325, 355, 387	32 kg	£4425
HCSSBFX-24-I	610 x 495 mm	407, 445, 485	40 kg	4638
HCSSBFX-24-S	610 x 610 mm	503, 550, 599	48 kg	4856
HCSSBFX-36-F	914 x 394 mm	485, 530, 577	46 kg	4849
HCSSBFX-36-I	914 x 495 mm	613, 670, 730	56 kg	5122
HCSSBFX-36-S	914 x 610 mm	755, 825, 898	62 kg	5610
HCSSBFX-48-F	1219 x 394 mm	650, 710, 773	59 kg	5283
HCSSBFX-48-I	1219 x 495 mm	814, 890, 969	77 kg	5653
HCSSBFX-48-S	1219 x 610 mm	1006, 1100, 1198	75 kg	6766
* Not available with	CE Mark All models	utilizo P 404A Pofrigorar	nt .	

Not available with CE Mark. All models utilize R-404A Refrigerant.

All Hot/Cold Simulated Stone Shelf Built-In Flush Top models with unattached Control Panel

only feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (assembled).

OPTIONS (available at time of purchase only)

Simulated stone color - Night Sky standard

Non-standard	d colors are non-returnable –	
SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge
SS-NSKY	Night Sky	Standard
		-

COLORS AND FINISHES – INSIDE BACK COVER

HC SS B x X - xx x(x) Hot/Cold Depth F = 394 mm Simulated Stone Shelf I = 495 mmS = 610 mm Built-In -F = Flush No Character = Not Flush xx = inchesWidth of Shelf (inches) No Condensing Unit -

52

Hot/Cold Shelves Built-In with unattached **Control Panel only** continued...





HOT/COLD SHELVES BUILT-IN FLUSH TOP (Aluminum Hardcoat) WITH UNATTACHED CONTROL PANEL ONLY

Model *	Dimensions W x D	Usable Space W x D	Hot Side Watts 220V, 230V, 240V	Approximate Ship Weight	List Price
HCSBFX-24-F	648 x 432 mm	610 x 394 mm	325, 355, 387	34 kg	£3445
HCSBFX-24-I	648 x 533 mm	610 x 495 mm	407, 445, 485	39 kg	3563
HCSBFX-24-S	648 x 648 mm	610 x 610 mm	503, 550, 599	44 kg	3728
HCSBFX-36-F	953 x 432 mm	914 x 394 mm	485, 530, 577	50 kg	3788
HCSBFX-36-I	953 x 533 mm	914 x 495 mm	613, 670, 730	52 kg	3873
HCSBFX-36-S	953 x 648 mm	914 x 610 mm	755, 825, 898	54 kg	4136
HCSBFX-48-F	1257 x 432 mm	1219 x 394 mm	650, 710, 773	55 kg	4037
HCSBFX-48-I	1257 x 533 mm	1219 x 495 mm	814, 890, 969	58 kg	4269
HCSBFX-48-S	1257 x 648 mm	1219 x 610 mm	1006, 1100, 1198	67 kg	4670


* Not available with CE Mark. All models utilize R-404A Refrigerant.

All Hot/Cold Shelf Built-In Flush Top models with unattached Control Panel only feature: Voltage: 220, 230 or 240 (CE not available). Models Shipped with: Shelf assembly with temperature probes, solenoid valve (attached to shelf), control panel

(shipped loose) and TXV valve (assembled).

COUNTERTOP CUTOUT DIMENSIONS

Wi	dth	Dei	oth
Min.	Max.	Min.	Max.
625 mm	635 mm	409 mm	419 mm
625 mm	635 mm	511 mm	521 mm
625 mm	635 mm	625 mm	635 mm
930 mm	940 mm	409 mm	419 mm
930 mm	940 mm	511 mm	521 mm
930 mm	940 mm	625 mm	635 mm
1234 mm	1245 mm	409 mm	419 mm
1234 mm	1245 mm	511 mm	521 mm
1234 mm	1245 mm	625 mm	635 mm
Wi	Width		ght
372	372 mm		mm
	Win 625 mm 625 mm 625 mm 930 mm 930 mm 930 mm 1234 mm 1234 mm 1234 mm Wie	625 mm 635 mm 625 mm 635 mm 625 mm 635 mm 930 mm 940 mm 1234 mm 1245 mm 1234 mm 1245 mm 1234 mm 1245 mm 1234 mm 1245 mm	Width Min. Dep Min. 625 mm 635 mm 409 mm 625 mm 635 mm 511 mm 625 mm 635 mm 625 mm 930 mm 940 mm 409 mm 930 mm 940 mm 511 mm 930 mm 940 mm 511 mm 930 mm 940 mm 625 mm 930 mm 940 mm 625 mm 930 mm 940 mm 511 mm 930 mm 940 mm 625 mm 1234 mm 1245 mm 511 mm 1234 mm 1245 mm 625 mm 1234 mm 1245 mm 625 mm



NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.



Cold Shelves Built-In Flush Top with unattached Control Panel only

These shelves are designed to keep your pre-chilled beverages, hors d'oeuvres, side dishes, buffet items and more in the perfect chill zone.

They have the benefit of allowing fabricators the freedom to design.



- Thermal break reduces condensation and temperature transfer (patent-pending)
- Top mounted hardcoat aluminum surface



COLD SHELVES BUILT-IN FLUSH TOP (Aluminum Hardcoat) WITH UNATTACHED CONTROL PANEL ONLY

Model *	Dimensions W x D	Usable Space W x D	Watts	Approximate Ship Weight	List Price
CSBFX-24-F	648 x 432 mm	610 x 394 mm	17	29 kg	£2895
CSBFX-24-I	648 x 533 mm	610 x 495 mm	17	33 kg	2911
CSBFX-24-S	648 x 648 mm	610 x 610 mm	17	36 kg	2967
CSBFX-36-F	953 x 432 mm	914 x 394 mm	17	35 kg	2981
CSBFX-36-I	953 x 533 mm	914 x 495 mm	17	42 kg	2981
CSBFX-36-S	953 x 648 mm	914 x 610 mm	17	50 kg	2998
CSBFX-48-F	1257 x 432 mm	1219 x 394 mm	17	43 kg	3609
CSBFX-48-I	1257 x 533 mm	1219 x 495 mm	17	51 kg	3506
CSBFX-48-S	1257 x 648 mm	1219 x 610 mm	17	56 kg	3526

* Not available with CE Mark. All models utilize R-404A Refrigerant.

All Cold Shelf Built-In Flush Top models with unattached Control Panel only feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (assembled).

COUNTERTOP CUTOUT DIMENSIONS

Model	Wi Minimum	dth Maximum	Dej Minimum	oth Maximum	
CSBFX-24-F	625 mm	635 mm	409 mm	419 mm	
CSBFX-24-I	625 mm	635 mm	511 mm	521 mm	
CSBFX-24-S	625 mm	635 mm	625 mm	635 mm	
CSBFX-36-F	930 mm	940 mm	409 mm	419 mm	
CSBFX-36-I	930 mm	940 mm	511 mm	521 mm	
CSBFX-36-S	930 mm	940 mm	625 mm	635 mm	
CSBFX-48-F	1234 mm	1245 mm	409 mm	419 mm	
CSBFX-48-I	1234 mm	1245 mm	511 mm	521 mm	
CSBFX-48-S	1234 mm	1245 mm	625 mm	635 mm	
Control Box	242	mm	197 mm		

NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.





NOTE: Models are not a CE offering, items are sold as components for fabricator

self certification.



Cold Shelves Undermount with unattached Control Panel only

These shelves mount directly against the underside of a granite, quartz, stainless steel or appropriate simulated stone countertop (no cutout required). Cooling transfers through the countertop to the top surface, without puncturing, for a true, seamless look.

They have the benefit of allowing fabricators the freedom to design.

- Condensing unit not included
- Mount under appropriate countertop material for a seamless look
- Aluminum surface
- Approved materials include granite and quartz up to 30 mm Swanstone as provided by Hatco and certain stainless steel or aluminum surfaces approved by Hatco. Please contact the factory for applications with other material.*



COLD SHELVES UNDERMOUNT (Aluminum) WITH UNATTACHED CONTROL PANEL ONLY

Model *	Usable Space W x D	Watts	Approximate Ship Weight	List Price
CSUX-24-F	610 x 394 mm	17	34 kg	£2650
CSUX-24-I	610 x 495 mm	17	32 kg	2665
CSUX-24-S	610 x 610 mm	17	39 kg	2705
CSUX-36-F	914 x 394 mm	17	45 kg	2640
CSUX-36-I	914 x 495 mm	17	44 kg	2648
CSUX-36-S	914 x 610 mm	17	45 kg	3186
CSUX-48-F	1219 x 394 mm	17	44 kg	3075
CSUX-48-I	1219 x 495 mm	17	59 kg	3093
CSUX-48-S	1219 x 610 mm	17	45 kg	3477


* Not available with CE Mark. All models utilize R-404A Refrigerant.

All Cold Shelf Undermount models with unattached Control Panel only feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), control panel (shipped loose) and TXV valve (assembled).

*Make structural modifications or add bracing underneath the countertop to ensure countertop will support the weight of the unit and its contents.





Glo-Ray® Built-In Rectangular Heated Simulated Stone Shelves . Three simulated stone colors for shelf:

Match the heat zone to your countertops with Hatco's Glo-Ray® **Built-In Heated Simulated Stone** Shelves. They're ideal for buffet lines or hors d'oeuvre displays. These unique warmers will safely hold food hot while blending in with your décor.

- Hatco Built-In Heated Simulated Stone Shelves are made of approved foodsafe materials
- Gray Granite, Bermuda Sand and Night Sky (standard). Non-standard colors are non-returnable
- Features a lighted rocker switch and thermostatically-controlled heated base
- Includes Control Box with 915 mm conduit and 1829 mm cord and plug
- Models with simulated stone are Swanstone®



GRSSB-3618 in Bermuda Sand simulated stone built into a Bermuda Sand simulated stone countertop



Standard Control Box

BUILT-IN RECTANGULAR HEATED SIMULATED STONE SHELVES

	Dimensions	Voltage			
Model^	W x D x H	Single Phase	Watt	Ship Weight	List Price
GRSSB-2418	651 x 498 x 57 mm	240	635	14 kg	£1244
GRSSB-3018	803 x 498 x 57 mm	240	780	16 kg	1296
GRSSB-3618	956 x 498 x 57 mm	240	930	19 kg	1348
GRSSB-4818	1260 x 498 x 57 mm	240	1270	24 kg	1477
GRSSB-6018	1565 x 498 x 57 mm	240	1560	30 kg	1895
GRSSB-7218	1870 x 498 x 57 mm	240	1860	32 ka	1974



^Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C.

All Built-In Rectangular Heated Simulated Stone Shelf models feature:

Cord Location: Cord is attached to Control Box.

OPTIONS (available at time of purchase only)

Designer Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel Standard – Non-standard colors are non-returnable -

RED	Warm Red	£27
BLACK	Black	27
GRAY	Gray Granite	27
WHITE	White Granite	27
NAVY	Navy Blue	27
GREEN	Hunter Green	27
COPPER	Antique Copper	27
Simulated stone colors	– Non-standard colors are non-returnable – Night Sky Standard –	
SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge
SS-NSKY	Night Class	<u> </u>
	Night Sky	Standard
GRSSB-FLUSH-TSTAT	Flush Mount Thermostatic Control Box in Stainless Steel with	Standard
GRSSB-FLUSH-TSTAT	0 /	Standard No Charge
GRSSB-FLUSH-TSTAT GRSSB-REC	Flush Mount Thermostatic Control Box in Stainless Steel with	



GRSSB-FLUSH-TSTAT **Optional Flush Mount** recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls

COLORS AND FINISHES – INSIDE BACK COVER

BUILT-IN RECTANGULAR HEATED SIMULATED STONE SHELVES CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
GRSSB-2418	625 mm	632 mm	473 mm	480 mm
GRSSB-3018	778 mm	784 mm	473 mm	480 mm
GRSSB-3618	930 mm	937 mm	473 mm	480 mm
GRSSB-4818	1235 mm	1241 mm	473 mm	480 mm
GRSSB-6018	1540 mm	1546 mm	473 mm	480 mm
GRSSB-7218	1845 mm	1851 mm	473 mm	480 mm

CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
GRSSB-FLUSH-TSTAT	149 mm	174 mm	102 mm







Built-Ins

Built-In Rectangular Heated Base Glass Shelves

Hatco Heated Base Glass Shelves have a heated ceramic glass top to create uniform heat across the entire surface and are made of approved foodsafe materials. Adjustable thermostatic controls allow surface temperature to be controlled easily.

- Shelves are made of approved foodsafe materials
- Attached stainless steel trim mounting ring standard



HBGB-3618 with optional White Glass

- Lighted On/Off rocker switch
- Includes remote Control Box with 915 mm conduit and 1829 mm cord and plug



HBGB-2418 with optional Designer Black Trim Ring

BUILT-IN RECTANGULAR HEATED BASE GLASS SHELVES

					1
Model^	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Ship Weight	List Price
HBGB-2418	654 x 502 x 57 mm	240	425	15 kg	£1772
HBGB-3018	806 x 502 x 57 mm	240	525	17 kg	1850
HBGB-3618	959 x 502 x 57 mm	240	630	19 kg	1926
$HBGB-4818^{\approx}$	1264 x 502 x 57 mm	240	850	23 kg	2114
HBGB-6018 [≈]	1568 x 502 x 57 mm	240	1050	29 kg	2265
HBGB-7218 $^{\approx}$	1873 x 502 x 57 mm	240	1260	34 kg	2415

^Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. \approx Units 1219 mm and greater are constructed of two equal size pieces of glass which create a seam.

All Built-In Rectangular Heated Base Glass Shelf models feature:

Temperature Range: 38°-93°C. Cord Location: Cord is attached to Control Box.

BUILT-IN RECTANGULAR HIGH-WATT HEATED BASE GLASS SHELVES						
Model^	Dimensions (W x D x H)	Voltage (Single Phase)	Watts	Ship Weight	List Price	
HBGBH-2418	654 x 502 x 57 mm	230	635	14 kg	£1916	
HBGBH-3018	806 x 502 x 57 mm	230	809	15 kg	1988	
HBGBH-3618	959 x 502 x 57 mm	230	984	18 kg	2063	
HBGBH-4818 $^{\approx}$	1264 x 502 x 57 mm	230	1268	22 kg	2244	
HBGBH-6018 [≈]	1568 x 502 x 57 mm	230	1618	25 kg	2389	
HBGBH-7218 [≈]	1873 x 502 x 57 mm	230	1968	29 kg	2539	

^Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 125°C. \approx Units 1219 mm and greater are constructed of two equal size pieces of glass which create a seam.

All Built-In Rectangular High-Watt Heated Base Glass Shelf models feature:

Cord Location: Cord is attached to Control Box.

OPTIONS (available at time of purchase only)

		• • • • • • • • • • • • • • • • • • • •		
M	Ceramic Glass Color	(Black Standard)	No Charge	HBGB-FLUSH-
NEW		HBGB-GLASS-BLK Black (Standard) HBGB-GLASS-WHT White		TSTAT Optional
N	Designer Color Beze	I (Flush Mount Control Box, Bezel only) – Stainless Steel Standard –		Flush Mount
	Non-standard colors	s are non-returnable –		recessed
		HBGB-BEZEL-BLACK Black	£26	Thermostatic
		HBGB-BEZEL-WHITE White	26	Control Box
NEW	Trim Ring Color – St	ainless Steel Standard – Non-standard colors are non-returnable –		with lighted
AD.		HBGB-TRIM-BLK Designer Black	27	On/Off rocker switch and
NEW		HBGB-TRIM-WHITE White	27	angled recessed
	HBGB-FLUSH-TSTAT	Flush Mount Thermostatic Control Box in Stainless Steel with Lighted Power Switch – HBGB		controls
		models only	No Charge	CONTINUS
	HBGB-REC	Built-In Heated Black Glass Shelf with Recessed Top – HBGB models only	No Charge	
	HBGBH-NO-TRIM	Unit without Trim Ring – HBGBH models only	No Charge	
	COND-3	915 mm Conduit in lieu of standard 1829 mm – used with Flush Mount ITC Control Box –		
		HBGBH models only	27	
	COND-10	3050 mm Conduit in lieu of standard 1829 mm – used with Flush Mount ITC Control Box –		
		HBGBH models only	48	

RECTANGULAR HIGH-WATT HEATED AND HEATED BASE GLASS SHELF COUNTERTOP CUTOUT DIMENSIONS

	Minimum	Maximum	Minimum	Maximum
Model	Width	Width	Depth	Depth
HBGB, HBGBH-2418	625 mm	632 mm	473 mm	480 mm
HBGB, HBGBH-3018	778 mm	784 mm	473 mm	480 mm
HBGB, HBGBH-3618	930 mm	937 mm	473 mm	480 mm
HBGB, HBGBH-4818	1235 mm	1241 mm	473 mm	480 mm
HBGB, HBGBH-6018	1540 mm	1546 mm	473 mm	480 mm
HBGB, HBGBH-7218	1845 mm	1851 mm	473 mm	480 mm

CONTROL BOX CUTOUT DIMENSIONS



HBG B x - xx xx Heated Base Glass _ _ _ _ _ _ _ Depth of Shelf Built-In _ _ _ _ _ _ _ _ _ Uepth of Shelf (inches) No Character = Standard Watt _ _ _ _ _ Width of Shelf (inches)

Standard Control Box for

HBGBH Standard Flush Mount recessed *Electronic* Control Box with lighted On/Off rocker switch and angled recessed controls





Convected Drawer Warmer

This Hatco unit is designed to keep a variety of food products hot and flavor-fresh until served. With a single non-humidified cavity and a single electronic temperature control, this unit provides even, dry heat for food products that do not require humidity. With insulated top, sides and back, these Drawer Warmers provide excellent energy efficiency.

- Digital electronic controller for easy programming
- Low velocity convected air system provides even temperature throughout the cabinet
- Tough, solid chrome handles are angled to avoid contact from passing carts
- Narrow width fits most kitchen footprints
- Heavy-duty drawer slides with nylon rollers
- Includes three full-size pans




CONVECTED DRAWER WARMER

	Dimensions	Voltage			
Model	W x D⁺ x H	Single Phase	Watts	Ship Weight	List Price
CDW-3N	421 x 774 x 762 mm	230	933	81 kg	£3136

Includes 32 mm for drawer handle.
 All Convected Models Feature:

Models Shipped with: One 152 mm deep food pan per drawer, low profile 51 mm casters, 1829 mm cord and plug.

Cord Location: Back of unit, top right corner.





Free Standing Drawer Warmers

Hold everything from meat to vegetables to rolls in the Hatco Drawer Warmers. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- Standard and narrow widths available
- Completely insulated individual cavities provide maximum energy efficiency
- Each drawer has a food pan, recessed individual thermostatic control, temperature monitor, vent slides and power switch, (optional touch screen display for HDW-1R2, -1.5R2, -2R2 models)
- 12-gauge stainless steel heavy-duty drawer slides with nylon rollers
- For additional humidity, see illustration Options and Accesory page
- Available with: oversized drawer frame, biscuit pan drawer, chip guard, casters, 6" adjustable stainless steel legs, water/ spillage pan and splash baffle
- Standard width Drawer Warmer pans lift straight out of drawer, (HDW-1N, -2N, -3N models require tipping the pan to install)



FI	REESTANDI	ING DRAWER WARMERS				
OPTION	Model	Dimensions (W x D* x H) Height excludes legs/casters	Voltage Single Phase	Watts	Ship Weight	List Price
 ✓ 	HDW-1	749 x 575 x 279 mm	240	450	44 kg	£1662
 ✓ 	HDW-2	749 x 575 x 537 mm	240	900	76 kg	2810
 ✓ 	HDW-3	749 x 575 x 794 mm	240	1350	106 kg	3962
	HDW-4	749 x 575 x 1051 mm	240	1800	134 kg	5405

All Freestanding Models Feature:

HDW-1, -2 and -3 shipped with: One 152 mm deep food pan per drawer, 102 mm plastic legs, 1829 mm cord and plug. HDW-4 Shipped with: One 152 mm deep full pan per drawer, 152 mm stainless steel legs, 1829 mm cord and plug. Cord Location: Back of unit, lower left corner.

F	REESTANDII	NG NARROW DRAWER WARMERS				
OPTION	Model	Dimensions W x D+ x H	Voltage Single Phase	Watts	Ship Weight	List Price
	HDW-1N	530 x 686 x 279 mm	240	450	44 kg	£1662
~	HDW-2N	530 x 686 x 537 mm	240	900	76 kg	2810
 ✓ 	HDW-3N	530 x 686 x 794 mm	240	1350	106 kg	3962

All Freestanding Narrow Models Feature:

Models Shipped with: One 152 mm deep food pan per drawer, 102 mm plastic legs, 1829 mm cord and plug. Cord Location: Back of unit, lower left corner.

OPTIONS AND ACCESSORIES – PAGE 62





July 1, 2019

Split Drawer Warmer

Expand holding capacities with Hatco's Split Drawer Warmer. Ideal for holding products that are lower in height profile such as bacon, sausage, hot dogs, rolls, pot pies and delicate products that should not be stacked. Each drawer features adjustable sliding vents and individual thermostatic controls to hold a wide variety of hot foods safely for peak serving periods.

- Each drawer has a recessed individual Each drawer will accommodate one thermostatic control and temperature monitor - optional touch screen display control (TTC) available
- Adjustable sliding vents on each drawer (No vents available as an option)
- Standard 527 x 324 x 64 mm pan supplied with each drawer



- 1/2 sheet pan
- Units come with 1829 mm cord, plug and 102 mm legs
- Require tipping the pan to install
- Optional Touch Screen Control available



HDW-1R2



HDW-1.5R2 with optional Touchscreen Control



with optional Touch Screen Control

SPLIT DRAWER WARMER

Model	Dimensions ⁺ W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price
HDW-1R2	733 x 419 x 378 mm	230	634	41 kg	£2532
HDW-1.5R2	733 x 419 x 494 mm	230	909	51 kg	3604
HDW-2R2	733 x 419 x 610 mm	230	1185	61 kg	3951

* Add 32 mm to depth for drawer handle. Height includes 102 mm legs.


All Split Drawer Warmers Models Feature:

Cord Location: Back of unit, lower left corner.

Pan Capacity: 527 W x 324D x 64 H mm.

HDW-1R2 Shipped with: Two 527 x 324 x 64 mm food pans, four 102 mm legs, 1829 mm cord and plug. HDW-1.5R2 Shipped with: Three 527 x 324 x 64 mm food pans, four 102 mm legs, 1829 mm cord and plug. HDW-2R2 Shipped with: Four 527 x 324 x 64 mm food pans, four 102 mm legs, 1829 mm cord and plug.

OPTIONS AND ACCESSORIES – PAGE 62







Built-In Drawer Warmers

Hold everything from meat to vegetables to rolls in the Hatco Drawer Warmers. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- Standard and narrow widths available
- 1-, 2- or 3-drawer built-in models
- · Completely insulated individual cavities provide maximum energy efficiency
- Each drawer has a food pan, recessed individual thermostatic control, temperature monitor, vent slides and power switch
- 12-gauge stainless steel heavy-duty drawer slides with nylon rollers
- For additional humidity, see illustration on following page
- Standard width Drawer Warmer pans lift straight out of drawer (HDW-1N, -2N and -3N models require tipping the pan to install)







💋 Stock Item page 110

HDW-2B

BUILT-IN DRAWER WARMERS

TC	Model	Dimensions (W x D* x H) Width & Height excludes front mounting flange	Voltage Single Phase	Watts	Ship Weight	List Price
~	HDW-1B	715 x 568 x 248 mm	240	450	40 kg	£1610
~	HDW-2B	715 x 568 x 506 mm	240	900	72 kg	2704
	HDW-3B	715 x 568 x 763 mm	240	1350	106 kg	3800

All Built-In Models Feature:

Models Shipped with: One 152 mm deep food pan per drawer and 1524 mm conduit.

BL	BUILT-IN NARROW DRAWER WARMERS									
TC	Model	Dimensions (W x D+ x H) Width & Height excludes front mounting flange	Voltage Single Phase	Watts	Ship Weight	List Price				
	HDW-1BN	494 x 679 x 248 mm	240	450	40 kg	£1610				
~	HDW-2BN	494 x 679 x 506 mm	240	900	72 kg	2704				
	HDW-3BN	494 x 679 x 763 mm	240	1350	106 kg	3800				

All Built-In Narrow Models Feature:

Models Shipped with: One 152 mm deep food pan per drawer and 1524 mm conduit.


+ On all models above, add 32 mm to depth for drawer handle.

OPTIONS AND ACCESSORIES – PAGE 62

BUILT-IN DRAWER WARMER CUT-OUT REQUIREMENTS

Model	"W" Dimension	"D" Dimension	"H" Dimension
HDW-1B	720 mm	610 mm	257 mm
HDW-2B	720 mm	610 mm	514 mm
HDW-3B	720 mm	610 mm	771 mm
HDW-1BN	500 mm	720 mm	257 mm
HDW-2BN	500 mm	720 mm	514 mm
HDW-3BN	500 mm	720 mm	771 mm

▲ Depth dimension includes 38 mm for conduit connector.





OPTIONS (available at time of purchase only)

Designer Drawer	· Front	Colors per Draw	er – Non-standard colors are non-returnable –

REĎ	Warm Red		£46
BLACK	Black		46
GRAY	Gray Granite		46
WHITE	White Granite		46
NAVY	Navy Blue		46
GREEN	Hunter Green		46
COPPER	Antique Copper		46
HDW-TTC	Temperature Control Timer – 6-channel control touchscreen display	:	£420
RD-NOVENT	No Drawer Vents (HDW-1R2, -1.5R2, -2R2 only)	No Ch	arge
OS-PAN	Oversized Drawer Frame and Pan (508 x 381 x 127 mm) in lieu of standard drawer with Pan (standard width models only)	per drawer	£94
BIS DRAWER	Biscuit Pan Drawer (accommodates two 457 x 330 mm Half-Size Sheet Pans - not included) in lieu of standard drawer with		
	Pan (standard width models only)	No Ch	arge
HDW-CHIP	Chip Guard	per drawer	30

ACCESSORIES

A	CCESSORIES		Stock Item page 110
	HDW 6" LEG	152 mm Adjustable Stainless Steel Legs (standard on HDW-4)	£117
~	HDW-CASTER-2	51 mm diameter casters – all swivel, 2 lock – adds 57 mm to height of unit (HDW-1, -2, -3 models only)	159
	HDW-CASTER-3	76 mm diameter Locking Casters - all swivel, all lock - adds 108 mm to height of unit (HDW-1, -2, -3 models	s only) 159
	HDW-CASTER-5	127 mm diameter Locking Casters – all swivel, all lock – adds 159 mm to height of unit	186
~	HDW-TRIVET	Custom Trivet raises (445 x 242 x 13 mm) food product 13 mm off bottom of full-size pan	36
~	HDW-SPILL	Water/Spillage Pan – one per drawer (excludes BIS Drawer and OS-Pan Options)	163
~	HDW-SPLASH	Splash Baffle – one per drawer (excludes BIS Drawer and OS-Pan Options)	32
	ST PAN 2	Stainless Steel Food Pan (527 x 324 x 64 mm)	51
	HDW 6" PAN	Stainless Steel Food Pan (527 x 324 x 152 mm)	71
	ALUM PAN	457 x 330 mm Half-Size Sheet Pan for Biscuit Pan Drawer (accommodates two)	20

COLORS AND FINISHES – INSIDE BACK COVER



HDW-TTC option Shown: Temperature adjustment and timer touchscreen control



Biscuit Pan Drawer (pans not included) **BIS DRAWER** option






HDW-SPLASH accessory



CASTERS accessory HDW-CASTER-2 All swivel, 2 lock HDW-CASTER-3 All swivel, all lock HDW-CASTER-5 All swivel, all lock



HDW-TRIVET accessory



the element

- D. Heat Shield (included)
- E. Heating Element (included)
- F. Chip Guard HDW-CHIP Option (standard width shown)



Additional Humidity A. Stainless Steel Food Pan (included) B. Splash Baffle HDW-SPLASH Accessory

C. Water/Spillage Pan (add 6 mm of water) HDW-SPILL Accessory





Glo-Ray[®] Merchandising Warmers

Designed with both a slanted and horizontal shelf, Glo-Ray[®] Merchandising Warmers offer the convenience of customer self-serve with the efficiency of preparing product in advance, and holding for peak serving periods.

- Warmer includes a slant and horizontal shelf for merchandising a variety of products like popcorn on the top shelf and nachos, boxed pizza or wrapped food on the bottom
- Standard Indicating Temperature Control (ITC) enhances accuracy and provides digital readout of temperatures
- Thermostatically-controlled hardcoated heated base to extend holding times
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Product divider rods and 102 mm legs included
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



GRSDS/H-36D with slant and horizontal shelf and optional 381 mm cleareance top shelf



GRSDS/H-36D with slant and horizontal shelf

SLANT/HORIZONTAL DISPLAY WARMERS – DUAL SHELF – TOP AND BASE HEAT

Model	No. of Bulbs, Divider Rods	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price
GRSDS/H-36D	4, 14	914 x 616 x 851 mm	240	1810	72 kg	£4270
GRSDS/H-41D	6, 16	1041 x 616 x 851 mm	240	2120	81 kg	4564

ACCESSORIES

All Slant/Horizontal Shelf Models Feature:

Cord Location: 1829 mm. Control side at right base corner.

OPTIONS (available at time of purchase only)

Designer	Colors – Non-standard colors a	re non-returnable –
Glossy Gra	ay Standard –	
DEN	Warm Pod	£970

NEU	Wallineu	£Z/9
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279
15SPACE	381 mm clearance for top shelf	
	in lieu of standard 305 mm	£85

COLORS AND FINISHES – INSIDE BACK COVER

GRSDS-DIV Additional Stainless Steel Divider Rods (bottom shelf only)

	(bottom shelf only)	each	£15
GRSDH-DIV	Additional Stainless Steel Divider Rods (top shelf only)	each	15

Glo-Ray Glo-Ray Sandwich Display Base Slanted and Center Horizontal Shelf



Glo-Ray[®] Merchandising Warmers

Designed specifically for showcasing wrapped or boxed product, the Hatco Glo-Ray[®] Merchandising Warmers hold hot food safely at proper serving temperatures. These warmers offer the convenience of self-serve and the efficiency of kitchen-to-server.

- Available in single- or two-tier models
- Horizontal or slant shelves
- Product divider rods sort food displays
- Thermostatically-controlled hardcoated heated base, with a temperature range of 85°- 93°C, to extend holding times
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest



GRSDH-30D

• Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



GRSDS-24D Dual slant shelf with optional sign holder (sign not included)



HORIZONTAL MERCHANDISING WARMERS

Model	No. of Bulbs, Divider Rods	Dimensions W x D x H (Height includes leas)	Voltage Single Phase	Usable Heated Shelf Space (W × D)	Watts	Ship Weight	List Price
Single Shelf	2		enigie i nace			opj	
GRSDH-24	2,5	610 x 495 x 303 mm	240	577 x 419 mm	861	22 kg	£1833
GRSDH-30	2,6	762 x 495 x 303 mm	240	730 x 419 mm	1060	25 kg	1970
GRSDH-36	2,7	914 x 495 x 303 mm	240	882 x 419 mm	1278	30 kg	2129
GRSDH-41	3, 8	1041 x 495 x 379 mm	240	1009 x 419 mm	1464	34 kg	2316
GRSDH-52	4, 10	1321 x 495 x 379 mm	240	1289 x 419 mm	1912	39 kg	2697
GRSDH-60	5, 12	1524 x 495 x 379 mm	240	1492 x 419 mm	2180	60 kg	3038
Dual Shelf							
GRSDH-24D	4, 10	610 x 495 x 303 mm	240	577 x 419 mm	1722	40 kg	£3190
GRSDH-30D	4, 12	762 x 495 x 643 mm	240	730 x 419 mm	2120	45 kg	3263
GRSDH-36D	4, 14	914 x 495 x 643 mm	240	882 x 419 mm	2556	54 kg	3452
GRSDH-41D	6, 16	1041 x 495 x 643 mm	240	1009 x 419 mm	2928	62 kg	3667
GRSDH-52D*	8, 20	1321 x 495 x 643 mm	240	1289 x 419 mm	3824	78 kg	4219
GRSDH-60D*	10, 24	1524 x 495 x 643 mm	240	1492 x 419 mm	4360	89 kg	4646
Cord without plug							

* Cord without plug.

All Horizontal Single and Dual Horizontal Display Warmer Models Feature:

Cord Location: 1829 mm. Left rear corner toward server side.

SLANT MERCHANDISING WARMERS


Model	No. of Bulbs, Divider Rods	Dimensions W x D x H (Height includes legs)	Voltage Single Phase	Usable Heated Shelf Space (W x D)	Watts	Ship Weight	List Price	
Single Shelf								
GRSDS-24	2, 5	610 x 616 x 469 mm	240	572 x 533 mm	749	36 kg	£2160	
GRSDS-30	2,6	762 x 616 x 469 mm	240	724 x 533 mm	870	36 kg	2324	
GRSDS-36	2, 7	914 x 616 x 545 mm	240	876 x 533 mm	1030	42 kg	2499	
GRSDS-41	3, 8	1041 x 616 x 545 mm	240	1003 x 533 mm	1195	44 kg	2682	
GRSDS-52	4, 10	1321 x 616 x 545 mm	240	1283 x 533 mm	1520	50 kg	3070	
GRSDS-60	5, 12	1524 x 616 x 545 mm	240	1486 x 533 mm	1715	76 kg	3315	
Dual Shelf								
GRSDS-24D	4, 10	610 x 616 x 820 mm	240	572 x 533 mm	1502	52 kg	£3373	
GRSDS-30D	4, 12	762 x 616 x 820 mm	240	724 x 533 mm	1690	64 kg	3574	
GRSDS-36D	4, 14	914 x 616 x 820 mm	240	876 x 533 mm	1990	73 kg	3806	
GRSDS-41D	6, 16	1041 x 616 x 820 mm	240	1003 x 533 mm	2325	82 kg	4091	
GRSDS-52D	8, 20	1321 x 616 x 820 mm	240	1283 x 533 mm	2960	98 kg	4747	
GRSDS-60D*	10, 24	1524 x 616 x 820 mm	240	1486 x 533 mm	3340	108 kg	5040	

* Cord without plug.

All Slant Single and Dual Shelf Models Feature:

Cord Location: 1829 mm. Control side at right base corner.

OPTIONS AND ACCESSORIES – PAGE 65







OPTIONS (available at time of purchase only)

ITC-S	Indicating Temperature Control (LED) for single shelf	add	£206
ITC-D	Indicating Temperature Control (LED) for dual shelf	add	353
SSEND	Stainless Steel End Panels in lieu of Glass End Panels	per shelf	25
127 mm Sneeze Gu	ard on Customer side (GRSDS one side, GRSDH two sides) –		
GRSD24BP	610 mm width models	per shelf	£96
GRSD30BP	762 mm width models	per shelf	112
GRSD36BP	914 mm width models	per shelf	134
GRSD41BP	1041 mm width models	per shelf	152
GRSD52BP	1321 mm width models	per shelf	169
GRSD60BP	1524 mm width models	per shelf	242
GRSDFLIPLOCK1	Flip-Up Door Locking Plate for GRSDS-xx, -xxD models -24 to -41	per shelf	10
GRSDFLIPLOCK2	Flip-Up Door Locking Plate for GRSDS-xx, -xxD models -52 to -60	per shelf	25
Display Sign Holde	r (Signs not included) Color matches unit color – Top or interm	ediate shelf	-
GRSDS-24SIGN	610 mm width. Requires 575 W x 100 H x 2 D mm Sign	each	£51
GRSDS-30SIGN	762 mm width. Requires 727 W x 100 H x 2 D mm Sign	each	51
GRSDS-36SIGN	914 mm width. Requires 879 W x 100 H x 2 D mm Sign	each	62
GRSDS-41SIGN	1041 mm width. Requires 1006 W x 100 H x 2 D mm Sign	each	62
GRSDS-52SIGN	1321 mm width. Requires 1286 W x 100 H x 2 D mm Sign	each	73
CDCDC COCICN	1524 mm width Boguiroo 1480 W x 100 H x 2 D mm Sign	aaab	72

OPTIONS

each 73

Set of four £45

(available at time of purchase only)

Designer Color	s – Non-standa	ard colors are
non-returnable	- Glossy Gray	Standard –
DED		00=0

RED	Warm Red	£279
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279

GRSDS-60SIGN ACCESSORIES

4"LEGS

102 mm Adjustable Legs (standard on units GRSDH-41 and larger, GRSDS-36 and larger and all duals)

1524 mm width. Requires 1489 W x 100 H x 2 D mm Sign

Plexi-Glass Flip-Up Doors on one side for GRSDS models – Not compatible with optional Sneeze Guards or Display Sign Holders in same openin				
SDS24FLIP	610 mm width models	pe		
SDS30FLIP	762 mm width models	ne		

- Not compatible	with optional Sneeze Guards or Display Sign I	Holders in same opening –
SDS24FLIP	610 mm width models	per shelf £164
SDS30FLIP	762 mm width models	per shelf 164
SDS36FLIP	914 mm width models	per shelf 164
SDS41FLIP	1041 mm width models	per shelf 164
SDS52FLIP	1321 mm width models - split doors	per shelf 279
SDS60FLIP	1524 mm width models - split doors	per shelf 279

Plexi-Glass Flip-Up Doors on one side for GRSDH models

· · · · · · · · · · · · · · · · · · ·						
 Not compatible w 	– Not compatible with optional Sneeze Guards or Display Sign Holders in same opening –					
GRSDH24FLIP	610 mm width models	per shelf	£164			
GRSDH30FLIP	762 mm width models	per shelf	164			
GRSDH36FLIP	914 mm width models	per shelf	164			
GRSDH41FLIP	1041 mm width models	per shelf	164			
GRSDH52FLIP	1321 mm width models - split doors	per shelf	279			
GRSDH60FLIP	1524 mm width models - split doors	per shelf	279			
GRSDH-DIV	Additional Stainless Steel Divider Rods – Horizontal model	each	15			
GRSDS-DIV	Additional Stainless Steel Divider Rods – Slant model	each	15			

COLORS AND FINISHES – INSIDE BACK COVER



SDS24FLIP shown with brackets for retrofit



Glo-Ray® Designer Merchandising Warmers

Boost impulse sales by showcasing your hot foods in the Hatco Glo-Ray® Designer Merchandising Warmers. Designed specifically for displaying wrapped or boxed product, these warmers hold hot food safely at proper serving temperatures.

- Designer look for contemporary décors
- · Constructed of aluminum and stainless steel with tempered glass side panels
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Available in single- or two-tier models
- Horizontal or slant shelves



- Product divider rods sort food displays
- Thermostatically-controlled hardcoated heated base extends holding times
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



DESIGNER HORIZONTAL DISPLAY WARMERS

inset panels

Model*	No. of Bulbs, Divider Rods	Dimensions W x D x H <i>(Height includes legs)</i>	Voltage Single Phase	Usable Heated Shelf Space (W x D)	Watts	Ship Weight	List Price
Single Shelf			-				
GR2SDH-24	2,5	768 x 686 x 459 mm	240	603 x 559 mm	820	40 kg	£2327
GR2SDH-30	2,6	921 x 686 x 459 mm	240	759 x 559 mm	1020	55 kg	2504
GR2SDH-36	2,7	1073 x 686 x 459 mm	240	911 x 559 mm	1220	59 kg	2686
GR2SDH-42	4,8	1226 x 686 x 459 mm	240	1064 x 559 mm	1490	63 kg	2976
GR2SDH-48	4,9	1378 x 686 x 459 mm	240	1216 x 559 mm	1690	73 kg	3268
GR2SDH-54	4, 10	1530 x 686 x 459 mm	240	1368 x 559 mm	1890	78 kg	3563
GR2SDH-60	6, 12	1683 x 686 x 459 mm	240	1521 x 559 mm	2210	85 kg	3837
Dual Shelf							
GR2SDH-24D	4, 10	768 x 686 x 737 mm	240	603 x 559 mm	1640	57 kg	£3831
GR2SDH-30D	4, 12	921 x 686 x 737 mm	240	759 x 559 mm	2040	72 kg	4049
GR2SDH-36D	4, 14	1073 x 686 x 737 mm	240	911 x 559 mm	2440	93 kg	4253
GR2SDH-42D	8, 16	1226 x 686 x 737 mm	240	1064 x 559 mm	2980	102 kg	4660
GR2SDH-48D	8, 18	1378 x 686 x 737 mm	240	1216 x 559 mm	3380	115 kg	5061
GR2SDH-54D*	8, 20	1530 x 686 x 737 mm	240	1368 x 559 mm	3780	124 kg	5468
GR2SDH-60D*	12, 24	1683 x 686 x 737 mm	240	1521 x 559 mm	4420	149 kg	5856
. D		Chalf Madala Fastura					

All Designer Horizontal Single and Dual Shelf Models Feature: Cord Location: Back center of base on control side.

DESIGNER SI ANT DISPLAY WARMERS

DESIGNER SLANT DISPLAT WARMENS							
Model*	No. of Bulbs, Divider Rods	Dimensions W x D x H (Height includes legs)	Voltage Single Phase	Usable Heated Shelf Space (W x D)	Watts	Ship Weight	List Price
Single Shelf							
GR2SDS-24	2, 5	768 x 680 x 579 mm	240	603 x 559 mm	820	47 kg	£2514
GR2SDS-30	2, 6	921 x 680 x 579 mm	240	759 x 559 mm	1020	50 kg	2650
GR2SDS-36	2, 7	1073 x 680 x 579 mm	240	911 x 559 mm	1220	62 kg	2880
GR2SDS-42	4, 8	1226 x 680 x 579 mm	240	1064 x 559 mm	1490	70 kg	3170
GR2SDS-48	4, 9	1378 x 680 x 579 mm	240	1216 x 559 mm	1690	74 kg	3453
GR2SDS-54	4, 10	1530 x 680 x 579 mm	240	1368 x 559 mm	1890	83 kg	3743
GR2SDS-60	6, 12	1683 x 680 x 579 mm	240	1521 x 559 mm	2210	92 kg	4009
Dual Shelf							
GR2SDS-24D	4, 10	768 x 680 x 860 mm	240	603 x 559 mm	1640	74 kg	£3899
GR2SDS-30D	4, 12	921 x 680 x 860 mm	240	759 x 559 mm	2040	84 kg	4172
GR2SDS-36D	4, 14	1073 x 680 x 860 mm	240	911 x 559 mm	2440	91 kg	4435
GR2SDS-42D	8, 16	1226 x 680 x 860 mm	240	1064 x 559 mm	2980	99 kg	4844
GR2SDS-48D	8, 18	1378 x 680 x 860 mm	240	1216 x 559 mm	3380	116 kg	5242
GR2SDS-54D*	8, 20	1530 x 680 x 860 mm	240	1368 x 559 mm	3780	120 kg	5647
GR2SDS-60D*	12, 24	1683 x 680 x 860 mm	240	1521 x 559 mm	4420	135 kg	6035


* When no color is specified, color inset panels and corner caps will be Black.

* Cord without plug.

All Designer Slant Single and Horizontal Display Models Feature:

Cord Location: Back center of base on control side.

OPTIONS AND ACCESSORIES – PAGE 67







OPTIONS (available at time of purchase only)

127 mm Sneeze Guard (Customer side only on Slant models) -

127 11111 011002			
GR2SD24BP	768 mm wide models	per shelf	£96
GR2SD30BP	921 mm wide models	per shelf	112
GR2SD36BP	1073 mm wide models	per shelf	134
GR2SD42BP	1226 mm wide models	per shelf	152
GR2SD48BP	1378 mm wide models	per shelf	169
GR2SD54BP	1530 mm wide models	per shelf	197
GR2SD60BP	1683 mm wide models	per shelf	242
Flip-Up Doors	on front or back –		
2SDS24FLIP	768 mm wide models	per shelf	£114
2SDS30FLIP	921 mm wide models	per shelf	132
2SDS36FLIP	1073 mm wide models	per shelf	148
2SDS42FLIP	1226 mm wide models	per shelf	169
Split Flip-Up D	oors on Front or Back –		
2SDS48FLIP	1378 mm wide models	per shelf	£198
2SDS54FLIP	1530 mm wide models	per shelf	233
2SDS60FLIP	1683 mm wide models	per shelf	266
2SDHFRTGLS	Front Glass in lieu of Channel Dividers and Divider Rods. Cannot		
	have Sneeze Guards or Flip-Up Doors (GR2SDH series only)	add	£ 63
SS-ITC	Indicating Temperature Control (LED) for single Shelf (adds 48 mm		
	to Horizontal model depth and 45 mm to Slant model depth)	add	206
DS-ITC	Indicating Temperature Control (LED) for dual shelf (adds 48 mm		
	to Horizontal model depth and 45 mm to Slant model depth)	add	353
	· ·		

ACCESSORIES

2SD-DIV	Additional Stainless Steel Divider Rods	each £15

COLORS AND FINISHES - INSIDE BACK COVER



OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-

returnable	- Glear Allouizeu Alullillulli Sla	anuaru –
RED	Warm Red	£279
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279

Designer Inset Panel Colors – Non-standard colors

are non-returnable –				
RED	Warm Red	No Charge		
BLACK	Black	Standard		
GRAY	Gray Granite	No Charge		
WHITE	White Granite	No Charge		
NAVY	Navy Blue	No Charge		
GREEN	Hunter Green	No Charge		
COPPER	Antique Copper	No Charge		
Designer Corner Caps – Non-standard colors are				

BLACK	Black Corner Caps	Standard
DKGRAY	Dark Gray Corner Caps	No Charge



Heated LED Merchandisers

The new Heated Merchandiser with LED lighting is sleekly designed to safely hold hot packaged food to attract your grab-and-go customers. Available with slant or horizontal shelves, the Heated LED Merchandising Warmers are offered in both single and dual shelf models.

- Choose from slant or horizontal, single or dual shelf models
- Infrared heat safely holds hot packaged product for hours
- High efficiency LED lighting creates better illumination of food product in the holding area
- Features a thermostatically-controlled hardcoated heated base shelf
- Hinged glass side panels are held in place magnetically and swing out for easy cleaning
- An optional Indicating Temperature Control (ITC) enhances accurate control of temperature



HXMS-36D in standard *Designer* Black

HORIZONTAL HEATED LED MERCHANDISING WARMERS

Model	Divider Rods	Dimensions (W x D x H) Height includes legs	Usable Heated Shelf Space (W x D)	Voltage	Amps	Watts	Ship Weight*	List Price
MUUCI	nous	Theight menutes legs		Voltage	Allips	wallo	Ship weight	LISUTING
Horizontal Singl	e Shelf							
HXMH-24	5	709 x 725 x 555 mm	567 x 552 mm	230	2.9	671	55 kg	£2559
HXMH-30	6	861 x 725 x 555 mm	720 x 552 mm	230	3.8	863	60 kg	2729
HXMH-36	7	1013 x 725 x 555 mm	872 x 552 mm	230	4.6	1055	66 kg	3004
HXMH-42	8	1166 x 725 x 555 mm	1025 x 552 mm	230	5.2	1201	73 kg	3279
HXMH-48	9	1318 x 725 x 555 mm	1177 x 552 mm	230	6.1	1392	86 kg	3552
HXMH-54	10	1471 x 725 x 555 mm	1329 x 552 mm	230	6.9	1585	93 kg	3806
HXMH-60	12	1623 x 725 x 555 mm	1482 x 552 mm	230	7.7	1777	104 kg	4153
Horizontal Dual	Shelf							
HXMH-24D	10	709 x 725 x 835 mm	567 x 552 mm	230	5.8	1342	73 kg	£3909
HXMH-30D	12	861 x 725 x 835 mm	720 x 552 mm	230	7.5	1726	84 kg	4113
HXMH-36D	14	1013 x 725 x 835 mm	872 x 552 mm	230	9.2	2110	93 kg	4296
HXMH-42D	16	1166 x 725 x 835 mm	1025 x 552 mm	230	10.4	2402	100 kg	4679
HXMH-48D	18	1318 x 725 x 835 mm	1177 x 552 mm	230	12.1	2784	111 kg	5053
HXMH-54D*	20	1471 x 725 x 835 mm	1329 x 552 mm	230	13.8	3170	123 kg	5431
HXMH-60D*	24	1623 x 725 x 835 mm	1482 x 552 mm	230	15.5	3554	136 kg	5784
HXIMH-60D*	24	1623 X 725 X 835 MM	1482 X 552 mm	230	15.5	3554	136 Kg	5.

SLANT HEATED LED MERCHANDISING WARMERS

Model	Divider Rods	Dimensions (W x D x H) Height includes legs	Usable Heated Shelf Space (W x D)	Voltage	Amps	Watts	Ship Weight*	List Price
Slant Single Shelf	F							
HXMS-24	5	709 x 715 x 551 mm	567 x 552 mm	230	2.9	671	51 kg	£2510
HXMS-30	6	861 x 715 x 551 mm	720 x 552 mm	230	3.8	863	60 kg	2644
HXMS-36	7	1013 x 715 x 551 mm	872 x 552 mm	230	4.6	1055	68 kg	2869
HXMS-42	8	1166 x 715 x 551 mm	1025 x 552 mm	230	5.2	1201	73 kg	3152
HXMS-48	9	1318 x 715 x 551 mm	1177 x 552 mm	230	6.1	1392	85 kg	3430
HXMS-54	10	1471 x 715 x 551 mm	1329 x 552 mm	230	6.9	1585	93 kg	3713
HXMS-60	12	1623 x 715 x 551 mm	1482 x 552 mm	230	7.7	1777	93 kg	3973
Slant Dual Shelf								
HXMS-24D	10	709 x 715 x 831 mm	567 x 552 mm	230	5.8	1342	73 kg	£3865
HXMS-30D	12	861 x 715 x 831 mm	720 x 552 mm	230	7.5	1726	85 kg	4110
HXMS-36D	14	1013 x 715 x 831 mm	872 x 552 mm	230	9.2	2110	94 kg	4392
HXMS-42D	16	1166 x 715 x 831 mm	1025 x 552 mm	230	10.4	2402	105 kg	4791
HXMS-48D	18	1318 x 715 x 831 mm	1177 x 552 mm	230	12.1	2784	111 kg	5183
HXMS-54D*	20	1471 x 715 x 831 mm	1329 x 552 mm	230	13.8	3170	123 kg	5580
HXMS-60D*	24	1623 x 715 x 831 mm	1482 x 552 mm	230	15.5	3554	132 kg	5959


* Shipping weights are approximate.

* Cord without plug.

All Heated LED Merchandising Models Feature:

Cord Location: Back center of base, on left side of control box.

OPTIONS AND ACCESSORIES – PAGE 69





HZMS-48D in standard *Designer* Black with optional LED accent lighting in support posts

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

RED	Warm Red	£279
BLACK	Black	Standard
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279

HZM-LP	Red LED Accent Lighting in support post	£365
SS-ITC	Indicating Temperature Control (LED) for single shelf	£194
DS-ITC	Indicating Temperature Control (LED) for dual shelf	336
107	Net competitute with file on decar in come an entry	

127 mm Sneeze Guards – Not compatible with flip-up doors in same opening –

	net tempanare man mp ap atter meane opening					
HZM24BP	On Customer side on -24 models	per shelf £135				
HZM30BP	On Customer side on -30 models	per shelf 146				
HZM36BP	On Customer side on -36 models	per shelf 158				
HZM42BP	On Customer side on -42 models	per shelf 174				
HZM48BP	On Customer side on -48 models	per shelf 194				
HZM54BP	On Customer side on -54 models	per shelf 208				
HZM60BP	On Customer side on -60 models	per shelf 218				
Plexi-Glass Flip-up Doors – Not compatable with Sneeze Guards in same opening, one side only –						
HZM24FLIP	On Control or Customer side on -24 models	per shelf £135				
HZM30FLIP	On Control or Customer side on -30 models	per shelf 146				
HZM36FLIP	On Control or Customer side on -36 models	per shelf 158				
HZM42FLIP	On Control or Customer side on -42 models	per shelf 174				
HZM48FLIP	On Control or Customer side on -48 models	per shelf 194				
HZM54FLIP	On Control or Customer side on -54 models	per shelf 208				
HZM60FLIP	On Control or Customer side on -60 models	per shelf 218				

ACCESSORIES

HZM-DIV	Additional Stainless Steel Divider Rod	s each £15
COLORS AND FINISHES - IN	ISIDE BACK COVER	



Glo-Ray[®] Heated Glass Merchandisers

Hatco's Glo-Ray[®] Heated Glass Merchandisers are perfect for holding hot wrapped or boxed foods on a buffet line or customer serving areas and feature a curved top design that compliments any décor.

- Blanket-style heating elements in the hardcoated base that are thermostatically-controlled
- The transparent shelf utilizes a patented heated glass, which radiates heat down while conducting heat up, allowing you to hold foods longer and safer at optimum serving temperatures
- LED lighting allows for optimal food product display with energy savings
- Also with tempered glass side panels, heated base and box stops/ sign holders on each shelf (signs not included)



GR3SDS-39DC1 in standard Glossy Gray with standard top sign holder (signs not included)

GR3SDS-39TCT in standard Glossy Gray with standard top sign holder (signs not included)

HEATED GLASS MERCHANDISERS


Model	Dimensions (W x D x H) Height includes legs	Usable Heated Shelf Space (W x D)	Voltage Single Phase	Watts	Amps	Ship Weight	List Price
Dual Shelf							
GR3SDS-39DCT	995 x 699 x 673 mm	895 x 540 mm	220-230-240	1945-2120-2305	8.8-9.2-9.6	84 kg	£4874
Triple Shelf							
GR3SDS-39TCT*	995 x 699 x 882 mm	895 x 540 mm	220-230-240	2720-2970-3235	12.4-12.9-13.5	109 kg	6609
* Cord without plug.						-	

All Heated Glass Merchandiser Models Feature:

Divider Rods Included :GR3SDS-39DCT: 14 rods (7 per shelf). GR3SDS-39TCT: 21 rods (7 per shelf). Cord Location: Right rear on server side.

OPTIONS (available at time of purchase only)

Designer Col	ors – Non-standard colors are non-returnable	9
– Glossy Gray		•
RED	Warm Red	No Charge
BLACK	Black	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge
ACCESS	ORIES	
3SD-DIV	Additional Stainless Steel Divider Rods	each £15
4"LEGS	102 mm Adjustable Legs	Set of four 45

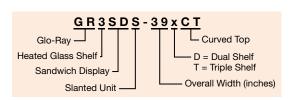





Glo-MAX[®] Heated Display

Hatco's Glo-MAX[®] Heated Display Cases are designed to hold prepared foods for prolonged periods of time while maintaining that "just made" quality.

The Hatco Glo-MAX Heated Display Case maintains peak serving temperatures, combined with humidity, giving you a display case that holds wrapped or unwrapped foods longer than conventional holding equipment.

GMHD-2PT

- Adjustable shelves can move up and down the back support posts and can be horizontal or slanted
- Energy efficient LED lighting to illuminate your food display
- Water pan to provide humidity for extended holding of products up to several hours
- Thermostatic mechanical heat control
- Holds up to six food pans with trivets
- Standard sign holder (480 x 100 mm) promotes your product offerings on the bottom front of unit (sign not included)

GMHDH-3PT

- Non-adjustable slanted shelves to show off food products
- Energy efficient LED lighting to illuminate your food display
- Electronically controlled humidity system with a 3.4 liter capacity water reservoir
- Thermostatic electronic heat control
- Holds up to nine food pans with trivets



GMHDH-3PT in Standard Stainless Steel

GMHD-2PT in Stainless Steel

HEATED DISPLAY

Model	Dimensions (W × D × H)	Voltage	Hz	Watts	Amps	Shipping Weights	List Price
GMHD-2PT	480 x 400 x 676 mm	220-230-240	50-60	615-670-730	2.8-2.9-3.1	36 kg	£ 888
GMHDH-3PT	670 x 464 x 757 mm	220-230-240	50-60	1280-1400-1525	5.8-6.1-6.3	57 kg	1774


All Heated Display Cases Features:

Models Shipped with:

GMHD-2PT: Rear glass sliding doors, adjustable shelves, LED lights, front sign holder (sign not included), six food pans with trivets, water pan for humidity, 25 mm adjustable legs and a 1829 mm cord with plug.

GMHDH-3PT: Rear glass sliding doors, LED lights, nine food pans with trivets, built-in water tank for humidity, 25 mm adjustable legs and a 1829 mm cord with plug. Cord Location: Back right of unit.

	on-standard colors are non-returnable – Stainless Steel Standard –	
BLACK	<i>Designer</i> Black	£6
4005000DV		
ACCESSORY		
TRIVET 265X205	265 X 205 mm, raises food product off bottom of food pan	£1:
PAN 265x205	265 X 205 mm, stainless steel food pan	1
GMHDT HUMPAN	Water pan, stainless steel (GMHD-2PT only)	1





Glo-Ray[®] Curved Merchandising Warmers

Looking to add a touch of class to a new point-of-sale area or to change or upgrade an existing area? Hatco's Glo-Ray[®] Curved Merchandising Warmer offers a unique and attractive solution for impulse sales areas.

- Single shelf and dual shelf units come standard with mirrored glass back panel
- Individual thermostatically-controlled heated base with master rocker switch maintains safe-serving temperatures
- Incandescent lighting allows for optimal food product display
- Humidified dual shelf unit contains a 1.2 liter capacity water reservoir
- Models with Simulated Stone are Swanstone®

GBCMW-1 in standard Designer

GRCMW-1 in standard *Designer* Black with food pans (not available)



GRCMW-1DH in standard *Designer* Black with food pans (not available)

CURVED MERCHANDISING WARMERS

Model	Dimensions W x D x H		Heated ce (W x D)	Voltage Single Phase	Watts	Ship Weight	List Price
Single Shelf		Top Shelf	Bottom Shelf				
GRCMW-1	562 x 546 x 505 mm	· —	501 x 330 mm	240	670	25 kg	£1846
Dual Shelf							
GRCMW-1D	660 x 511 x 683 mm	577 x 314 mm	577 x 396 mm	240	1540	42 kg	£3501
Dual Shelf with Humidity							
GRCMW-1DH*	660 x 511 x 683 mm	577 x 314 mm	577 x 396 mm	240	1660	45 kg	£3742
 						<u> </u>	

* Humidity on bottom shelf only.

All Curved Merchandising Warmer Models Feature:


Water Reservoir Capacity (GRCMW-1DH model only): 1.2 liters.

Cord Location: Control side at right base corner.

OPTIONS (available at time of purchase only)

Designer Colors (un	nit's painted surface) – Non-standard colors are non-retu	rnable –
RED	Warm Red	No Charge
BLACK	Black	Standard
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge
Simulated Stone Co	olor (unit's painted surface and decorative trim inserts) –	
Non-standard color	rs are non-returnable –	
GGRAN	Gray Granite	£326
NSKY	Night Sky	326
BSAND	Bermuda Sand	326
CMWDBACKFLIP	Top and bottom shelf Flip-Up Doors on Server's side in lieu	
	of Mirrored Back Panel (GRCMW-1D, -1DH models only)	£213
CMWDTOPFLIP	Top shelf Flip-Up Door on Customer Side in lieu of Sneeze	
	Guard (GRCMW-1D, -1DH models only)	107

COLORS AND FINISHES – INSIDE BACK COVER

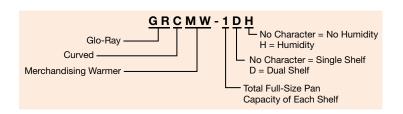





Glo-Ray[®] *Designer* Heated Display Cases

Our *Designer* series Glo-Ray[®] Heated Display Case with curved glass and incandescent lighting will display your offering with flare and elegance. We combine our thermostatically-controlled heated base and infrared overhead heating to blanket your offering at the perfect temperature.

- High visibility merchandiser with curved tempered glass
- Exclusive cool base construction
- Rollerless sliding doors
- Available with or without controlled humidity (bottom shelf only)
- Constructed of aluminum and stainless steel with tempered glass
- Curved glass front tilts forward for easy cleaning
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Shatter-resistant incandescent lights illuminate the food product

Humidified reservoir is located in between pans





GRCD-2PD with optional pan skirt and *Designer* color, flip-up doors, and accessory food pans



GRCDH-1PD with pan skirt and new optional flip-up doors and accessory food pan. (top baking dish not available)



GRCDH-3PD shown in standard Stainless Steel, with accessory food pans

DESIGNER DIS	SPLAY CASE	'S					
Model	Bulbs	Dimensions W x D x H <i>(Height includes legs)</i>	Usable heated shelf space $(W \times D)$	Voltage Single Phase	Watts	Ship Weight	List Price
Single Shelf							
GRCD-1P	2	524 x 660 x 610 mm	460 x 533 mm	240	425	43 kg	£3006
GRCD-2P	3	826 x 660 x 610 mm	762 x 533 mm	240	780	55 kg	3430
GRCD-3P	3	1156 x 660 x 610 mm	1092 x 533 mm	240	1005	69 kg	3849
Dual Shelf							
GRCD-1PD	4	524 x 660 x 806 mm	460 x 533 mm	240	905	45 kg	£3534
GRCD-2PD	6	826 x 660 x 806 mm	762 x 533 mm	240	1285	77 kg	4017
GRCD-3PD	6	1156 x 660 x 806 mm	1092 x 533 mm	240	1710	95 kg	4616
Single Shelf with	Humidity*						
GRCDH-1P	2	524 x 660 x 610 mm	460 x 533 mm	240	697	41 kg	£3430
GRCDH-2P	3	826 x 660 x 610 mm	762 x 533 mm	240	1052	56 kg	3849
GRCDH-3P	3	1156 x 660 x 610 mm	1092 x 533 mm	240	1277	71 kg	4304
Dual Shelf with H	lumidity*						
GRCDH-1PD	4	524 x 660 x 806 mm	460 x 533 mm	240	1177	55 kg	£3990
GRCDH-2PD	6	826 x 660 x 806 mm	762 x 533 mm	240	1532	79 kg	4470
GRCDH-3PD	6	1156 x 660 x 806 mm	1092 x 533 mm	240	1982	100 kg	5072


*Humidity on bottom shelf only. Includes pan skirt on bottom shelf. Pan skirts accommodate 64 H mm pans.

All Designer Display Case Models Feature:

Cord Location: Control side at right base corner.

All Models With Humidity Feature: Water Chamber Capacity: 3 liters.

OPTIONS AND ACCESSORIES – PAGE 74







GRCD-2PD with optional flip-up doors and Designer color

OPTIONS (available at time of purchase only)

Self-Closing Flip-Up Doors on both shelves on Customer side in lieu of Glass Front

oth to unit) –	
1-Pan models	£447
2-Pan models	490
3-Pan models	930
om shelf (accommodates 64 D mm pans	
midified models) –	
1-Pan model in lieu of Pan Rail	£31
2-Pan model in lieu of Pan Rail	58
3-Pan model in lieu of Pan Rail	85
Pan Skirt for upper shelf of 2-Pan models, in lieu of Pan Stop	£ 58
Pan Skirt for upper shelf of 3-Pan models, in lieu of Pan Stop	112
liding Doors in lieu of Glass Doors (Server side only) –	
dels –	
-1P	£51
	1-Pan models 2-Pan models 3-Pan models 3-Pan models om shelf (accommodates 64 D mm pans midified models) – 1-Pan model in lieu of Pan Rail 2-Pan model in lieu of Pan Rail 3-Pan model in lieu of Pan Rail 3-Pan model in lieu of Pan Rail Pan Skirt for upper shelf of 2-Pan models, in lieu of Pan Stop Pan Skirt for upper shelf of 3-Pan models, in lieu of Pan Stop Iding Doors in lieu of Glass Doors (Server side only) – dels –

MIRROR	-2P	71
MIRROR	-3P	88
Dual Shelf N	lodels –	
MIRROR	-1PD	£102
MIRROR	-2PD	142
MIRROR	-3PD	176

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are nonreturnable – Stainless Steel Standard –

iciui nabic – J	lanness sieer slanuaru –	
RED	Warm Red	£279
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279

COLORS AND FINISHES – INSIDE BACK COVER

HEATED DISPLAY CASE MAXIMUM PAN CAPACITIES*

Model	Pan Capacity	Optional Pan Skirt Frames
GRCD-1P	1 Full-Size Pan	One SKIRT-1P
GRCD-2P	2 Full-Size Pans	One SKIRT-2P
GRCD-3P	3 Full-Size Pans	One SKIRT-3P
GRCD-1PD – Top Shelf	1 Half-Size Pan or one 356 mm Pizza Pan	None
GRCD-1PD – Bottom Shelf	1 Full-Size Pan	One SKIRT-1P
GRCD-2PD – Top Shelf	1 Full-Size Pan and 1 Third-Size Pan or two 356 mm Pizza Pans	One UPPERSKIRT-2P
GRCD-2PD – Bottom Shelf	2 Full-Size Pans	One SKIRT-2P
GRCD-3PD – Top Shelf	2 Full-Size Pans or three 356 mm Pizza Pans	One UPPERSKIRT-3P
GRCD-3PD – Bottom Shelf	3 Full-Size Pans	One SKIRT-3P

All pan capacities shown are for non-humidified models. 64 mm deep pans recommended for bottom shelf of humidified models.





Glo-Ray[®] Heated Display Cases

Designed for "show and sell" areas in any foodservice operation, the Hatco Glo-Ray[®] Heated Display is perfect for hot food merchandising. The top and bottom heat combine to keep food at peak serving temperature longer.

- Thermostatically-controlled heated base 38° - 93°C to extend holding times
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Constructed of aluminum and stainless steel with tempered glass
- Shatter-resistant incandescent lights illuminate the food product
- Exclusive cool base construction minimizes heat transfer, keeping exterior base cool
- Single or dual models, with or without humidity (bottom shelf only)
- Rollerless sliding doors



GRHD-4PD with optional *Designer* color, mirrored glass doors and accessory food pans



GRHDH-2P with standard pan skirt and optional double side opening, and accessory food pans

DISPLAY CASES

DISPLAT GASES								
Model	Bulbs	Dimensions (W x D x H) Height includes legs	Usable Heated Shelf Space (W x D)	Voltage Single Phase	Watt	Ship Weight	List Price	
Single Shelf								
GRHD-2P	4	826 x 660 x 635 mm	712 x 553 mm	240	940	54 kg	£2548	
GRHD-3P	5	1156 x 660 x 635 mm	1042 x 553 mm	240	1350	65 kg	2904	
GRHD-4P	6	1486 x 660 x 635 mm	1372 x 553 mm	240	1785	98 kg	3417	
Dual Shelf								
GRHD-2PD	6	826 x 660 x 762 mm	712 x 553 mm	240	1310	68 kg	£3515	
GRHD-3PD	8	1156 x 660 x 762 mm	1042 x 553 mm	240	1755	86 kg	3936	
GRHD-4PD	8	1486 x 660 x 762 mm	1372 x 553 mm	240	2480	104 kg	4508	
Single Shelf with	Humidity*							
GRHDH-2P	4	826 x 660 x 635 mm	712 x 553 mm	240	1212	57 kg	£3001	
GRHDH-3P	5	1156 x 660 x 635 mm	1042 x 553 mm	240	1622	74 kg	3356	
GRHDH-4P	6	1486 x 660 x 635 mm	1372 x 553 mm	240	2329	98 kg	4170	
Dual Shelf with H	lumidity*							
GRHDH-2PD	6	826 x 660 x 762 mm	712 x 553 mm	240	1582	80 kg	£3969	
GRHDH-3PD	8	1156 x 660 x 762 mm	1042 x 553 mm	240	2027	85 kg	4390	
GRHDH-4PD	8	1486 x 660 x 762 mm	1372 x 553 mm	240	2980	109 kg	5266	
Art to see Caller and the address of the	المراجعة والمراجعة والمراجعة والمراجع	and all the second states and all the part of the		_				

*Humidity on bottom shelf only. Includes pan skirt on bottom shelf. Pan skirts accommodate 64 mm pans.

All Heated Display Case Models Feature:

Water Reservoir Capacity : 2-Pan and 3-Pan : 3 liters.

4-Pan : 6 liters. **Cord Location:** 1829 mm, control side at right base corner.

OPTIONS AND ACCESSORIES – PAGE 76









SKIRT-2P	2-Pan model Pan Skirt for 64 D mm pans on bottom shelf
	(standard on Humidified models) in lieu of Pan Rail
SKIRT-3P	3-Pan model Pan Skirt for 64 D mm pans on bottom shelf
	(standard on Humidified models) in lieu of Pan Rail
	consists of one SKIRT-1P and one SKIRT-2P)
SKIRT-4P	4-Pan model Pan Skirt for 64 D mm pans on bottom shelf (standard
	on Humidified models) in lieu of Pan Rail (consists of two SKIRT-2P)
UPPERSKIRT-2P	Pan Skirt for upper shelf of 2-Pan models, in lieu of Pan Stop
UPPERSKIRT-3P	Pan Skirt for upper shelf of 3-Pan models, in lieu of Pan Stop
UPPERSKIRT-4P	Pan Skirt for upper shelf of 4-Pan models, in lieu of Pan Stop
FLIP	Flip-Up Doors on Control side in lieu of Sliding Glass Doors
Sliding door in lie	u of Fixed Glass Customer panel –
SLIDE-2P	Per opening
SLIDE-3P	Per opening
SLIDE-4P	Per opening
Flip-Un door in lie	eu of Fixed Glass Customer panel –
FLIP-2P	Per opening
FLIP-ZP	Per opening

Mirror Glass Sliding Door in lieu of Glass Sliding Door (server side only) – MIRROR-2P Per opening

OPTIONS

£ 58

> £122 134 169

£122

134

169

£ 71

88 112

(available at time of purchase only)

Designer Col		
	ard colors are non-ret	urnable
	Steel Standard –	
RED	Warm Red	£279
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279

Per opening **COLORS AND FINISHES – INSIDE BACK COVER**

Per opening

Per opening

Per opening

FLIP-3P

FLIP-4P

MIRROR-3P

MIRROR-4P

OPTIONS (available at time of purchase only)

HEATED DISPLAY CASE MAXIMUM PAN CAPACITIES

Model	Pan Capacity	Optional Pan Skirt Frames
GRHD-2P	2 Full-Size Pans	One SKIRT-2P
GRHD-3P	3 Full-Size Pans	One SKIRT-3P
GRHD-4P	4 Full-Size Pans	One SKIRT-4P
GRHD-2PD – Top Shelf	2 Half-Size Pans or two 356 mm Pizza Pans	One UPPERSKIRT-2P
GRHD-2PD – Bottom Shelf	2 Full-Size Pans	One SKIRT-2P
GRHD-3PD – Top Shelf	3 Half-Size Pans or three 356 mm Pizza Pans	One UPPERSKIRT-3P
GRHD-3PD – Bottom Shelf	3 Full-Size Pans	One SKIRT-3P
GRHD-4PD – Top Shelf	2 Full-Size Pans or 4 Half-Size Pans or four 356 mm Pizza Pans	One UPPERSKIRT-4P
GRHD-4PD – Bottom Shelf	4 Full-Size Pans	One SKIRT-4P

All pan capacities shown are for non-humidified models. 64 mm deep pans recommended for bottom shelf of humidified models.





Plate Warmers

Hatco's Plate Warmers are designed to hold preheated serving plates where your customers can access them easily. Countertop or Built-In models available. Easy to load and easy to clean. Serving hot food on preheated plates will help extend the holding times of most foods, and adds to a better customer experience.

- Can hold 25 plates up to 305 mm in diameter
- A covered, digital temperature control with an adjustable range of 40° - 50°C
- Energy efficient LED lighting illuminates the interior from the top
- Optional *Designer* Black
 Powdercoating
- Cabinet cutout dimensions are: 423 x 512 mm









SEL

PWC-12 in optional *Designer* Black

PLATE WARMERS


Model Counter Top	Dimensions (W x D x H)	Opening Dimensions (W x H)	Voltage	Watts	Amps	Ship Weight	List Price
PWC-12	427 x 441 x 566 mm	320 x 400 mm	220-230-240	389-425-463	1.7-1.8-1.9	29 kg	£905
Built-In PWB-12	444 x 442 x 534 mm	322 x 400 mm	220-230-240	389-425-463	1.7-1.8-1.9	22 kg	£838

All Plate Warmer Models Feature:

Models Shipped with:

PWC-12: Power On/Off switch, a detachable 1829 mm power cord, a 1000 mm jumper cord and a wall-mounting kit.
 PWB-12: Power On/Off switch, a detachable 1829 mm power cord and a 1000 mm jumper cord.
 Cabinet cut-out dimensions for PWB-12: 423W x 512H mm.
 Cord Location: back of unit, top left side.

OPTIONS (available at time of purchase only)







Flav-R-Fresh[®] Impulse Display Cabinets

A profitable way to create impulse food sales is with the small Flav-R-Fresh® Holding and Display Cabinet. Using separate heat and humidity controls to keep crisp foods crisp and moist foods moist allows you to showcase your products longer using minimum counter space.

- Full-view display with tempered glass sides and door
- Incandescent light enhances food appeal while safeguarding food products from bulb breakage
- Internal thermometer indicates cabinet temperature
- Single- or double-door opening models provide fast access to food racks
- Food decals and merchandising signs are available to help promote product visibility and appeal



FDWDE-1 with rotating 4-tier rack and accessory pans

V Stock Item page 110

IMPULSE DISPLAY CABINETS

	Model*	Description ^o	Dimensions W x D x H●	Voltage Single Phase	Ship Weight	List Price [®]
	FDWDE-1	1 Door w/Circle Rack w/Motor	492 x 530 x 726 mm	240	38 kg	£2047
1	FDWDE-1X	1 Door w/Multi-Purpose Rack	492 x 530 x 726 mm	240	38 kg	1902
	FDWDE-2	2 Doors w/Circle Rack w/Motor	492 x 559 x 726 mm	240	40 kg	2148
	FDWDE-2X	2 Doors w/Multi-Purpose Rack	492 x 559 x 726 mm	240	40 kg	2073

Models FDWDE-1 and FDWDE-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.
 Rack listed is included with unit. Other racks available – deduct price of included rack and add price of substituted rack to list price.

Rack listed is included with unit. Uther racks available – deduct price of included rack and
 Usight includes standard 25 mm lass

• Height includes standard 25 mm legs.

^oFor non-humidified cabinet, deduct £105. Unit will only operate in dry mode.

All Impulse Cabinet Models Feature:

Cabinet Opening Dimensions: 400 W x 502 H mm.

Door Hinges: Control Side: Left-hand side. Customer Side (Two-Door models only): Right-hand side. Max. Pizza Pan Size: 381 mm diameter. Water Tank Capacity for Humidity System: 2 liters. Cord Location: 1829 mm. Facing controls, left-hand side panel, lower right corner.

FDWDE-xX							
Flav-R-Fresh Display Warmer –	No Rack Motor 1 = One door 2 = Two door						
Econoline ———							

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –

REĎ	Warm Red	£279
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279
FDWD-6FRT	152 mm Merchandising Display Sign Holder for Control side only, includes Metal Holder only.	
	Available in all <i>Designer</i> Colors to match your unit (Black is standard). Adds 29 mm to height of unit.	
	Requires (1) sign 491 W x 157 H x 2 D mm – not included	£65
FDWD-6SIGN	162 mm One-Sided Merchandising Display Sign Holder, includes Metal Holder and window –	
	one per side, three maximum. Available in all <i>Designer</i> Colors to match your unit (Black is standard).	
	Adds 32 mm to height of unit. Requires (1) sign 491 W x 159 H x 1.59 D mm – not included	50
FDWD-DIS	76 mm One-Sided Merchandising Display Sign Holder, includes Metal Holder and window –	
	one per side, three maximum. Available in all Designer Colors to match your unit (Black is standard)	
	Adds 32 mm to height of unit. Requires (1) one sign 484 W x 83 H x 2 D mm - not included	49

	AUDLOUUTIL		
	FDWD-LEGS	102 mm Adjustable Legs (102-127 mm)	£ 48
	COUPLING	Motorless Rack Coupling for FDWDE-1X and -2X models (select Circle Rack or Pretzel Tree)	26
	FDWD4TCRR	4-Tier Circle Rack with Pizza Pan Retainers (Requires Coupling for -1X or -2X models)	144
	FDWD4SMP	4-Shelf Multi-Purpose Rack (each shelf 346 W x 321 D mm)	163
	FDWD3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)	163
EW	FDW3SAR	3-Shelf Angle Rack (in lieu of standard rack)	362

RACKS – PAGE 82 Colors and Finishes – Inside Back Cover







Flav-R-Savor[®] Holding & Display Cabinets

Balancing a precise combination of heat and humidity, the Hatco Flav-R-Savor® Cabinets provide an attractive showcase for hot food displays and generate impulse sales. A complete range of cabinet sizes, door options and rack types allows for perfect merchandising of food products such as pizza, fried foods, bakery items, sandwiches and more.

- Full-view display with tempered glass sides and door provide maximum heat retention
- Controlled heat and humidity for longer holding times
- 3-liter stainless water reservoir provides all day moisture
- Low-water protection prevents heating element burnout and alerts operator to low-water condition
- Revolving or stationary display racks
- Available in two heights with singleor double-sided opening models
- LED lights with clear plastic cover help showcase food product





FSD-2X with 3-tier pan rack and accessory food pans **FSDT-2** with 4-tier circle rack and 102 mm legs, optional *Designer* Black color and accessory food pans



DISPLAY (DISPLAY CABINETS							
Model*	Description ^o	Dimensions W x D x H	Cabinet Opening Dimensions (W \times H)	Voltage Single Phase	Watts	Ship Weight	List Price [®]	
Standard		500 040 000	400 470	2.12		50.1		
FSD-1	1 Door w/3-Tier Circle Rack	569 x 612 x 699 mm	483 x 473 mm	240	1414	50 kg	£3176	
FSD-1X	1 Door w/3-Tier Pan Rack	569 x 612 x 699 mm	483 x 473 mm	240	1414	50 kg	3093	
FSD-2	2 Doors w/3-Tier Circle Rack	569 x 642 x 699 mm	483 x 473 mm	240	1414	52 kg	3390	
FSD-2X	2 Doors w/3-Tier Pan Rack	569 x 642 x 699 mm	483 x 473 mm	240	1414	51 kg	3307	
Tall								
FSDT-1	1 Door w/4-Tier Circle Rack	569 x 612 x 826 mm	483 x 603 mm	240	1414	54 kg	£3231	
FSDT-1X	1 Door w/4-Tier Pan Rack	569 x 612 x 826 mm	483 x 603 mm	240	1414	54 kg	3164	
FSDT-2	2 Doors w/4-Tier Circle Rack	569 x 642 x 826 mm	483 x 603 mm	240	1414	55 kg	3479	
FSDT-2X	2 Doors w/4-Tier Pan Rack	569 x 642 x 826 mm	483 x 603 mm	240	1414	52 kg	3397	
▲ Modele FCD	1 FOD 0 FODT 1 and FODT 0 inclus	do rook motor Modolo with "V	" decignator					

 Models FSD-1, FSD-2, FSDT-1 and FSDT-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

 Rack listed is included with unit. Other racks available – deduct price of included rack and add price of substituted rack to list price.

^oFor non-humidified cabinet, deduct £105. Unit will only operate in dry mode.

All Display Cabinet Models Feature:

Door Hinges: Control Side: Left-hand side.

Customer Side (Two-Door models only): Right-hand side.

Max. Pan Size: 483 mm diameter.

Water Tank Capacity for Humidity System: 3 liters.


Cord Location: 1829 mm. Facing controls, left-hand side panel, lower right corner.


Water Quality Requirements:

Water supply in excess of .75 grains of hardness per liter (GPL) must be treated and softened before being used. Water containing over .75 GPL will decrease the efficiency and reduce the operating life of the unit.

NOTE: Product failure caused by liming or sediment buildup is not covered under warranty.

OPTIONS AND ACCESSORIES – PAGE 80 Decorative Kit – Page 81 Racks – Page 82



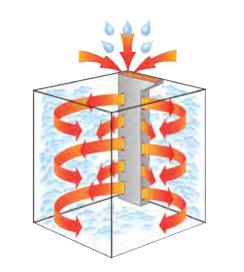

CONTROLLED MOISTURIZED HEAT KEEPS HOT FOODS FRESH LONGER Flav-R-Savor air flow pattern is designed to maintain consistent cabinet temperature without drying out foods. The precise combination of heat and humidity creates a "blanket" effect around the food. The air flow rate enables the cabinet to recover temperature rapidly after opening and closing the door.



July 1, 2019



Two FSDT-1 with 4-tier circle racks, optional sign holders (signs not included) and accessory pans

OPTIONS (available at time of purchase only)

THERM	Mechanical Controls	No Charge
FSD7SIGN	191 mm Merchandising Display Sign Holder, includes Metal Holder and	
	window - one per side, three maximum. Available in all Designer Colors	
	to match your unit (Black is standard). Adds 32 mm to height of unit.	
	Requires (1) sign 572 W x 191 H x 2 D – sign not included	£52
ACCESSO	RIES	
F-LEGS-4	102 mm Adjustable Legs	£48
COUPLING	Motorless Rack Coupling for FSD-1X, FSD-2X, FSDT-1X and FSDT-2X	
	Models (Select appropriate Circle Rack)	26
RACK – FSD OI	VLY –	
FSD5SMP	5-Shelf Multi-Purpose Rack (Each shelf 457 W x 406 D mm)	£221
FSD3TCR	3-Tier Circle Rack with Pizza Pan Retainers	
	(Requires Coupling for -1X or -2X models)	134
FSD3TPR	3-Tier Pan Rack (Accommodates Half-Size Sheet Pans - not included)	207
RACKS – FSDT	ONLY –	
FSDT7SMP	7-Shelf Multi-Purpose Rack (Each shelf 457 W x 406 D mm)	£265
FSDT4TCR	4-Tier Circle Rack with Pizza Pan Retainers	
	Requires Coupling for -1X or -2X models)	144
FSDT5TCR	5-Tier Circle Rack with Pizza Pan Retainers	
	(Requires Coupling for -1X or -2X models)	214
FSDT4TPR	4-Tier Pan Rack (Accommodates Half-Size Sheet Pans - not included)	232
FSDT3SAR	3-Shelf Angle Rack (15° angle shelves) Each shelf 457 W x 413 D mm	498
FSDT3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)	235

DECORATIVE KIT – PAGE 81 RACKS – PAGE 82 **COLORS AND FINISHES – INSIDE BACK COVER**

OPTIONS

(available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard -

RED	Warm Red	£279
BLACK	Black	279
GRAY	Gray Granite	279
WHITE	White Granite	279
NAVY	Navy Blue	279
GREEN	Hunter Green	279
COPPER	Antique Copper	279





Decorative Kit for FSD and FSDT Models only

Transform your Hatco Flav-R-Savor[®] Holding & Display Cabinet from a "heated box" into a *Designer* Merchandiser with a variety of simple accessory additions. Create a new look and feel to your decor.

- The curved hinged header allows easy access to controls and water fill cup, and gives a great area to brand your food product with a magnetic sign (sign not included)
- All decorative pieces come standard in *Designer* Black powdercoat, with additional *Designer* colors available
- Curved inset panels enhance the overall look
- The base skirt completes the transformation and gives additional branding area. Available in flat or curved panels for front and/or back of unit
- Signs not included

OPTIONS (available at time of purchase only) (not available on Stock items) (additional lead time required)

Designer Colors – Non-standard colors are non-returnable – Black Standard –						
RED	WR	Warm Red	No Charge			
BLACK	BK	Black	Standard			
GRAY	GG	Gray Granite	No Charge			
WHITE	WG	White Granite	No Charge			
NAVY	NB	Navy Blue	No Charge			
GREEN	HG	Hunter Green	No Charge			
COPPER	AC	Antique Copper	No Charge			

ACCESSORIES

Side Insets - Must choose Designer Color - Black Standard -

FSD-INSET1 (3)	Two Crescent Inset Panels for FSD models	£52
FSD-INSET2 O	Two Wave Inset Panels for FSD models	52
FSDT-INSET1K O	Two Crescent Inset Panels for FSDT models	52
FSDT-INSET2 O	Two Wave Inset Panels for FSDT models	52

Top Covers - Must choose Designer Color - Black Standard -


FSD-CTLH O	Curved Hinged Header on control side (Fits 609 W x 149 H mm sign) for FSD and FSDT models	£186
FSD-CUSH 🛛	Curved Header on non-control side (Fits 609 W x 149 H mm sign) for FSD and FSDT models	133

Base Skirts – Requires 102 mm Adjustable Legs (not included) – Must choose Designer Color – Black Standard –				
FSD-SQB	One Flat Front Panel 🗿 and one Flat Back Panel 🔊 (Fits 508 W x 93 H mm sign)			
	and two Flat Side Panels 🛛 (Fits 473 W x 93 mm H sign) for FSD and FSDT models	£158		
FSD-1CB	One Curved Front Panel			
	and two Flat Side Panels	282		
FSD-2CB	One Curved Front Panel 🛛 and one Curved Back Panel 🖨 (Fits 647 W x 93 H sign) and two Flat Side Panels 🗗			
	(Fits 473 W x 93 mm H sign) for FSD and FSDT models	408		

F-LEGS-4 102 mm Adjustable Legs for FSD and FSDT models

COLORS AND FINISHES - INSIDE BACK COVER



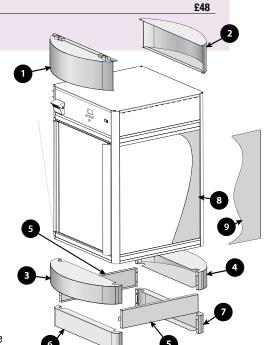


FSDT-1 with 4-tier circle rack and full Decorative Kit




Display Rack Selections


Racks for FDWDE Models (Page 78)



4-Tier Circle Rack FDWD4TCRR (Max. 381 mm dia. pans) (83 mm between tiers)



4-Shelf Multi-Purpose Rack FDWD4SMP (Max. 457 x 330 mm) (Half-Size Sheet Pans fit FDWD-2 and -2X models only) (95 mm between shelves)




3-Tier Pretzel Tree FDWD3TPT (149 mm between tiers)




3-Tier Angle Rack FDW3SAR (137 mm between tiers)

Racks for FSD/FSDT Models (Page 79)




FSDT 4-Tier Circle Rack FSDT4TCR (Max. 483 mm dia. pans) (117 mm between tiers)

Holding & Display Cabinets




FSDT 3-Tier Pretzel Tree **FSDT3TPT** (149 mm between tiers)




5-Tier Circle Rack FSDT5TCR (Max. 483 mm dia. pans) (98 mm between tiers)




FSDT 7-Shelf Multi-Purpose Rack FSDT7SMP (Max. 457 x 330 mm Half-Size Sheet Pans) (64 mm between shelves)




FSDT 4-Tier Pan Rack FSDT4TPR (Max. 457 x 330 mm Half-Size Sheet Pans) (89 mm between tiers)




FSD 3-Tier Circle Rack FSD3TCR (117 mm between tiers)



FSDT 3-Shelf Angle Rack FSDT3SAR (89 mm between shelves)



FSD 3-Tier Pan Rack FSD3TPR (89 mm between tiers)



FSD 5-Shelf Multi-Purpose Rack FSD5SMP (64 mm between shelves)

R Removable Shelves





Mini Display Warmers

The Hatco Mini Display Warmer is perfect for cookies, pastries, wrapped or boxed sandwiches or any other product that does not require humidity. Hot air circulates throughout the entire cabinet, keeping food at safeserving temperatures. The small footprint takes up little of your valuable counterspace while merchandising your breakfast, lunch or dinner offerings.

- Magnetically adjustable shelves allow horizontal or slanted displays
- Tempered glass sides and incandescent light showcase your food
- Thermostatic control with rocker switch
- Available as a 1-door or a 2-door pass-through model
- Doors may be field converted to either side
- Optional black hood with backlit graphic sign cutout that can be rotated in field to face any side (sign included)



Magnetically adjustable shelves provide flexibility for a variety of product choices

MINI DISPLAY WARMERS - NON-HUMIDIFIED

N	lodel	Description	Dimensions W x D x H	Voltage Single Phase	Ship Weight	List Price
N	/IDW-1X	1 door w/3 shelves	400 x 432 x 646 mm	230	21 kg	£1418
N	/IDW-2X	2 doors w/3 shelves	400 x 465 x 646 mm	230	24 kg	1472
A 11 M.I.m	i Dianlau I	Andala Fastura				

All Mini Display Models Feature: Cabinet Opening Dimensions: 315 W x 396 H mm. Door Hinges: Control Side: Left-hand side. Customer Side (Two-Door models only): Right-hand side.


Cord Location: Facing controls, lower right corner.

OPTIONS (available at time of purchase only)

Designer Color for Posts, Base and Top Trim – Non-standard colors are non-returnable –

RED	Warm Red	No Charge
BLACK	Black	Standard
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge
BCKLIT-MDW	Black Hood with Backlit Sign Cut-out on one	
	side (sign included)	£73

COLORS AND FINISHES – INSIDE BACK COVER





MDW-1X with standard *Designer* color and optional hood with backlit sign cut-out on one side (sign included)



Flav-R-Savor[®] Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostaticallycontrolled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Reduced height less than 762 mm high and wider footprint for increased capacity
- Stacking kit available

• Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord and plug are standard



F S H C - 6 W x					
Flav-R-Savor	──				
Holding Cabinet —	Full-Size Sheet Pan Capacity				

LOW PROFILE H	OLDING CABINETS					
Model	Description	Dimensions W x D x H●	Voltage single phase	Watts	Ship Weight	List Price
FSHC-6W1	1 Door	645 x 751 x 816 mm	240	1697	76 kg	£4417
FSHC-6W2*	2 Doors	645 x 811 x 816 mm	240	1697	82 kg	4695
 Height Includes stand 	hard casters					

FSHC-6W2 is a two-door pass-through single cabinet, not two units stacked.

All Low Profile Holding Cabinet Models Feature:

Cabinet Opening Dimensions: 546 W x 483 H mm.

Top Surface Dimensions: 645 W x 657 D mm.

Models Shipped with: Bracket for holding cord during transport (FSHC-6W1 unit only),1829 mm cord and plug, 102 mm diameter casters (with 130 mm clearance), six sets of adjustable angle slides.

Pan Capacity: Six 457 W x 660 D mm sheet pans or six 2/1 Gastronorm pans on 76 mm centers, eleven 457 W x 660 D mm sheet pans^a, eleven 2/1 Gastronorm pans on 38 mm centers^a, or twelve 508 W x 305 D x 64 H mm hotel pans.

Water Tank Capacity for Humidity System: 3 liters.

Cord Location: Back of unit, upper right side.

 $\ensuremath{^{\ensuremath{\text{m}}}}$ With purchase of extra pan slides.

Water Quality Requirements:


Water supply in excess of .75 grains of hardness per liter (GPL) must be treated and softened before being used. Water containing over .75 GPL will decrease the efficiency and reduce the operating life of the unit **NOTE: Product failure caused by liming or sediment buildup is not covered under warranty.**

OPTIONS (available at time of purchase only)

Extra Pan Slides

COLORS AND FINISHES – INSIDE BACK COVER

BLACK	Designer Black	£139
SS	Stainless Steel	139
Colors (Top) - I	Non-standard colors are non-returnable – Silver Gray Standard -	-
BLACK	Designer Black	£139
SS	Stainless Steel	139
6W-SS-DR	Stainless Steel Door in lieu of Glass Door	£ 66
HD-SS-DR	Heavy-Duty Stainless Steel Door with Positive Latch Handle	234
6W1-LPCAST	51 mm Low Profile Locking Casters in lieu of standard Casters	
	(51 mm diameter with 76 mm clearance - overall height 756 mm)	No Charge
6W1-STACK	Silver Gray Stack Hardware mounted on top of cabinet for two	
	FSHC-6W1 units in lieu of Casters	98
CORDWIND	Bracket for holding Cord during transport (standard on FSHC-6W1)	22

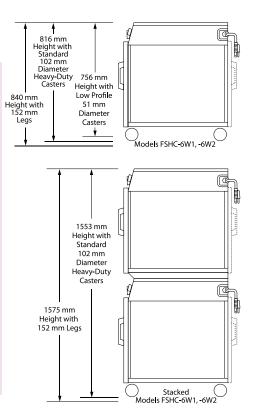

pair £61

6W1-SLIDE





Flav-R-Savor® **Humidified Portable Holding Cabinets**

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostaticallycontrolled heat and humidity allows you to hold product for hours.

• Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer



- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord and plug are standard
- Stacking kit available

FSHC-7-1 with standard 102 mm casters and accessory food pans

PORTABLE HOLDING CABINETS

Model*	Description	Dimensions W x D x H●	Voltage single phase	Watts	Ship Weight	List Price
FSHC-7-1	1 Door	578 x 753 x 892 mm	240	1697	79 kg	£4265
FSHC-7-2+	2 Doors	578 x 812 x 892 mm	240	1697	82 kg	4529

* 7 slides on each side. Sheet Pans not included. 6-Shelf Multi-Purpose Rack can be substituted for angle slides at no charge.

• Height includes standard casters.

FSHC-7-2 is a two-door pass-through single cabinet, not two units stacked.

All Portable Cabinet Models Feature:

Cabinet Opening Dimensions: 470 W x 559 H mm.

Top Surface Dimensions: 575 W x 657 H mm.

Models Shipped with: Bracket for holding cord during transport (FSHC-7-1 unit only), 102 mm diameter casters (with 130 mm clearance), seven sets of adjustable angle slides for 457 W x 660 D mm pans or 305 W x 508 D mm pans.

Pan Capacity: Seven 457 W x 660 D mm sheet pans on 76 mm centers, seven 508 W x 305 D x 64 H mm^a hotel pans, or seven 1/1 Gastronorm pans^a. Water Tank Capacity for Humidity System: 3 liters.

Cord Location: 1829 mm cord and plug, back of unit, upper right side.

^a With purchase of extra pan slides.

Water Quality Requirements:

Water supply in excess of .75 grains of hardness per liter (GPL) must be treated and softened before being used. Water containing over .75 GPL will decrease the efficiency and reduce the operating life of the unit NOTE: Product failure caused by liming or sediment buildup is not covered under warranty.

OPTIONS (available at time of purchase only)

Colors (Side l	Panels) – Non-standard colors are non-returnable – Silver Gray	' Standard –
BLACK	<i>Designer</i> Black	£139
SS	Stainless Steel	139
Colors (Top)	– Non-standard colors are non-returnable – Silver Gray Standa	rd –
BLACK	Designer Black	£139
SS	Stainless Steel	139
SS-DR	Stainless Steel Door in lieu of Glass Door	66
HD-SS-DR	Heavy-Duty Stainless Steel Door with Positive Latch Handle	234
LPCAST	51 mm Low Profile Casters in lieu of standard Casters	
	(51 mm diameter with 76 mm clearance)	25
4LEGS	102 mm Adjustable Legs in lieu of standard Casters	No Charge
6SS	152 mm Stainless Steel Legs in lieu of standard casters	No Charge
7-1-STACK	Silver Gray Stacking Hardware mounted to top of cabinet for two	
	FSHC-7-1 units in lieu of Casters	127
CORDWIND	Bracket for holding Cord during transport (standard on FSHC-7-1)	22


ACCESSORIES

SLIDEWIRE Wire Shelf

per shelf £76

COLORS AND FINISHES – INSIDE BACK COVER



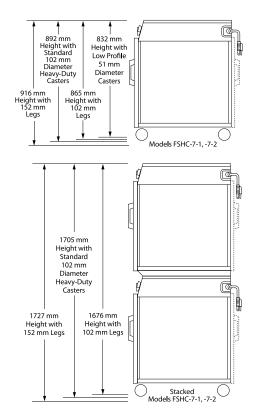

FSHC-7-

Flav-R-Savor

Humidified

Holding Cabinet

X L Number of doors

Quantity of Shelves



Flav-R-Savor[®] Heated Air Curtain Cabinets

The patented Flav-R-Savor® Heated Air Curtain Cabinet effectively and safely holds hot food hot without the use of doors, allowing immediate access to product. Warm air at the front of the cabinet is forced downward, through the ducts above the opening, forming a "curtain" of heated air. A portion of the heated air is drawn toward the rear of the cabinet, warming each pan.

- Perfect for holding wrapped or sealed product like tortillas, burritos and ribs, as well as product on sheet pans like biscuits, hamburger patties and baked potatoes
- The 2-pan pass-through accommodates two full-size sheet pans or four half-size sheet pans, and the 4-pan unit accommodates four full-size sheet pans or eight half-size sheet pans
- Easy to use digital controls, a lighted On/Off switch and a 1829 mm cord and plug



FS2HAC-4PT 4-tier pass-through with accessory food pans

HEATED AIR CURTAIN CABINETS

		Dimensions						
Model	Description	W x D x H	Voltage	Hz	Watts	Amps	Ship Weight	List Price
FS2HAC-2PT	2-Tier PT	613 x 994 x 468 mm	240	50	3022	12.6	75 kg	£5213
FS2HAC-4PT	4-Tier PT	613 x 994 x 671 mm	240	50	3362	14	86 kg	5693
Heated Air Curtain	Cabinet Models Fe	ature:						
binet Opening Dime	nsions: FS2HAC-2P	f: 459 x 216 mm.						

FS2HAC-4PT: 464 x 411 mm.

Cord Location: Top of unit towards the back, left side.







Drop-In Ice Wells

Hatco Drop-In Ice Wells provide all the quality features of our Refrigerated Drop-Ins, but without any refrigeration or electrical components. These ice-cooled, insulated units can hold pre-chilled food products at preferred serving temperatures. Ideal for salad bars, cold buffets and chilled beverage bars. Pan dividers give you greater flexibility in your variety of featured food products.

- Full-size, insulated, top mount wells available to hold 1- to 6-pan configurations
- Optimal insulation on sides and bottom to ensure better cold retention and cost savings
- Bezel design allows clear viewing and easy food access
- Larger 1" brass drain with flat screen simplifies cleaning
- False bottom accessory conveniently holds ice above drain for ease of draining
- Matches the Hatco line of Wells for a fully integrated look

IWB-2 with slant option IWB-2SLANT

IWB-6 with accessory food pan (bowls not available)

DROP-IN INSULATED ICE WELLS

	Dimensions		
Model	W x D x H	Ship Weight	List Price
IWB-1	483 x 686 x 305 mm	22 kg	£ 1079
IWB-2	813 x 686 x 305 mm	27 kg	1242
IWB-3	1143 x 686 x 305 mm	37 kg	1440
IWB-4	1473 x 686 x 305 mm	43 kg	1670
IWB-5	1803 x 686 x 305 mm	50 kg	1931
IWB-6	2134 x 686 x 305 mm	50 kg	2226
CE Mark not availa	able.		

E Mark not available

OPTIONS (available at time of purchase only)

IWB-1SLANT	Slant Option for IWB-1	£148
IWB-2SLANT	Slant Option for IWB-2	160
IWB-3SLANT	Slant Option for IWB-3	172
IWB-4SLANT	Slant Option for IWB-4	184
IWB-5SLANT	Slant Option for IWB-5	196
IWB-6SLANT	Slant Option for IWB-6	208


ACCESSORIES (available for purchase at any time)

False Bottom	ns (allows for 89 mm of ice and sits on ledge of well) –	
1FB3.5	For IWB-1 models (includes one 1-pan Insert)	£ 54
2FB3.5	For IWB-2 models (includes one 2-pan Insert)	102
3FB3.5	For IWB-3 models (includes one 1-pan Insert and one 2-pan Insert)	149
4FB3.5	For IWB-4 models (includes two 2-pan Insert)	195
5FB3.5	For IWB-5 models (includes one 1-pan Insert and two 2-pan Inserts)	243
6FB3.5	For IWB-6 models (includes three 2-pan Inserts)	290
False Bottom	ns (allows for 203 mm of ice and sits on bottom of well) –	
1FB8	For IWB-1 models (includes one 1-pan Insert)	£ 54
2FB8	For IWB-2 models (includes one 2-pan Insert)	102
3FB8	For IWB-3 models (includes one 1-pan Insert and one 2-pan Insert)	149
4FB8	For IWB-4 models (includes two 2-pan Insert)	195
5FB8	For IWB-5 models (includes one 1-pan Insert and two 2-pan Inserts)	243
6FB8	For IWB-6 models (includes three 2-pan Inserts)	290

ADDITIONAL PANS, SUPPORT BARS AND LID ACCESSORIES - PAGES 106-107

DROP-IN ICE WELL COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
IWB-1	435 mm	457 mm	640 mm	660 mm
IWB-2	765 mm	787 mm	640 mm	660 mm
IWB-3	1095 mm	1118 mm	640 mm	660 mm
IWB-4	1426 mm	1448 mm	640 mm	660 mm
IWB-5	1756 mm	1778 mm	640 mm	660 mm
IWB-6	2086 mm	2108 mm	640 mm	660 mm




IWB-1, -2, -3, -4, -5, -6 89 mm 5° slant ______ † 29 mm


Slant Option for:


False Bottom Accessories

1-part, 2-part or 3 part(s) depending on pan size



(1, 2, 3, 4, 5 or 6FB3.5) allows 89 mm of ice





(1, 2, 3, 4, 5 or 6FB8) allows 203 mm of ice

2FB8 Accessory



Drop-In Slim Ice Wells

Hatco Drop-In Slim Ice Wells provide all the quality features of our Refrigerated Drop-Ins, but without any refrigeration or electrical components. Now available in a slim configuration providing customers with a complete well within easy reach, regardless of the sneeze guards.

Ideal for salad bars, cold buffets and chilled beverage bars. Pan dividers give you greater flexibility in your variety of featured food products.

- Holds 1- to 4-full-size pan configurations, but placed lengthwise
- Optimal insulation on sides and bottom to ensure better cold retention and cost savings
- Bezel design allows clear viewing and easy food access
- Larger 1" brass drain with flat screen simplifies cleaning
- False bottom accessory conveniently holds ice above drain for ease of draining
- Matches the Hatco line of Wells for a fully integrated look

IWB-S4 with optional IWB-S4SLANT

IWB-S2

DROP-IN INSULATED SLIM ICE WELLS

	Dimensions		
Model	W x D x H	Ship Weight [†]	List Price
IWB-S1	687 x 481 x 306 mm	22 kg	£ 1120
IWB-S2	1222 x 481 x 306 mm	30 kg	1300
IWB-S3	1757 x 481 x 306 mm	39 kg	1481
IWB-S4	2292 x 481 x 306 mm	49 kg	1710

CE Mark not available.

OPTIONS (available at time of purchase only)

IWB-S1SLANT	Slant Option for IWB-S1	£148
IWB-S2SLANT	Slant Option for IWB-S2	160
IWB-S3SLANT	Slant Option for IWB-S3	172
IWB-S4SLANT	Slant Option for IWB-S4	184

ACCESSORIES (available for purchase at any time)

False Bottom	s (allows for 89 mm of ice and sits on ledge of well) –	
1FBS3.5	For IWB-S1 models (includes one 1-pan Insert)	£ 53
2FBS3.5	For IWB-S2 models (includes one 2-pan Insert)	100
3FBS3.5	For IWB-S3 models (includes one 1-pan Insert and one 2-pan Insert)	146
4FBS3.5	For IWB-S4 models (includes two 2-pan Insert)	192
False Bottom	s (allows for 203 mm of ice and sits on bottom of well) –	
1FBS8	For IWB-S1 models (includes one 1-pan Insert)	£ 53
2FBS8	For IWB-S2 models (includes one 2-pan Insert)	100
3FBS8	For IWB-S3 models (includes one 1-pan Insert and one 2-pan Insert)	146
4FBS8	Far IMD C4 madels (includes two 0 new lacent)	100
46030	For IWB-S4 models (includes two 2-pan Insert)	192


ADDITIONAL PANS AND SUPPORT BAR ACCESSORIES - PAGES 106-107

DROP-IN SLIM ICE WELLS COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
IWB-S1	641 mm	662 mm	433 mm	456 mm
IWB-S2	1175 mm	1196 mm	433 mm	456 mm
IWB-S3	1710 mm	1731 mm	433 mm	456 mm
IWB-S4	2245 mm	2266 mm	433 mm	456 mm



IWB-S1, -S2, -S3, -S4



False Bottom Accessories 1-, 2- or 3-part(s) depending on pan size




(1, 2, 3 or 4FBS3.5) allows 89 mm of ice



203 mm of ice



Remote Drop-In Frost Tops Ordering Instructions

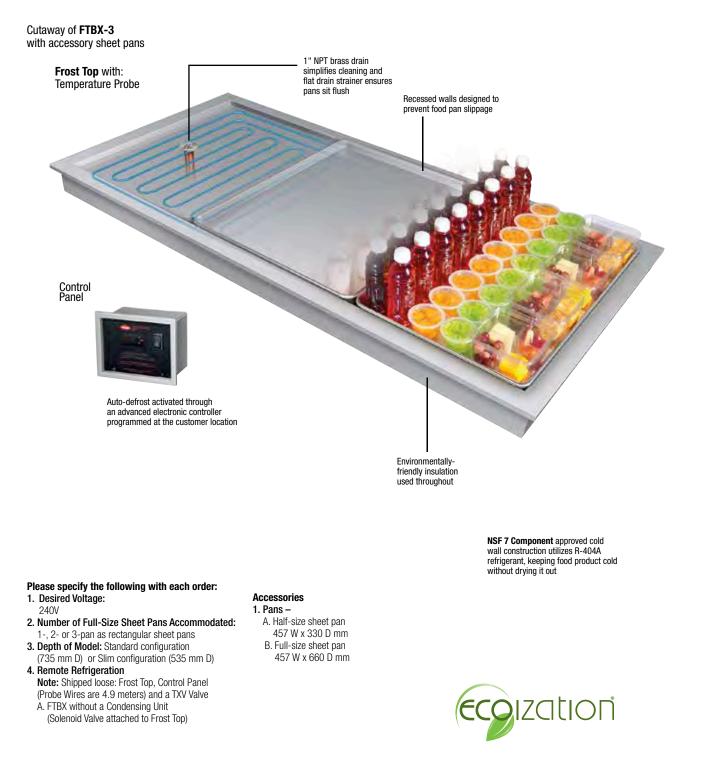

REMOTE DROP-IN FROST TOP COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
FTBX-1	697 mm	711 mm	494 mm	511 mm
FTBX-2	949 mm	965 mm	694 mm	711 mm
FTBX-3	1407 mm	1422 mm	694 mm	711 mm
FTBX-S2	1354 mm	1372 mm	494 mm	511 mm
FTBX-S3	2011 mm	2029 mm	494 mm	511 mm



Remote Drop-In Frost Tops

Keeping pre-chilled beverages, snacks, hors d'oeuvres and side dishes cool and ready-to-serve, the Hatco Remote Drop-In Frost Tops offer additional flexibility with remote configurations. Also available in a slim configuration that provides customers with a Frost Top within easy reach, regardless of the sneeze guards.

- Accommodates full-size sheet pans
- Additionally the FTBX-2 and -3 models include a standard 1" NPT brass drain
- Models include a control panel (shipped loose - probe wires are 4.9 meters) but shipped without a condensing unit for the increased flexibility of multiple Frost Top configurations
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- Optimal insulation on sides and bottom to ensure better cold retention



Control panel (shipped loose)

REMOTE DROP-IN FROST TOPS – WITH CONTROL PANEL

Model	Dimensions W x D x H	Voltage	BTU/Hour	Ship Weight †	List Price
FTBX-1	735 x 535 x 211 mm	240	330	39 kg	£3040
FTBX-2	991 x 735 x 90 mm	240	630	63 kg	3508
FTBX-3	1448 x 735 x 90 mm	240	930	100 kg	4037
	D 4044 Defrigerent				

All models utilize R-404A Refrigerant.

*Shipping weights are approximate.

CE Mark not available.

All Remote Drop-In Frost Top Models with Control Panel Feature:

Models Shipped with: Electronic temperature control, TXV valve (shipped loose) and a solenoid valve attached to bottom of unit.

REMOTE SLIM DROP-IN FROST TOPS – WITH CONTROL PANEL

	Dimensions				
Model	W x D x H	Voltage	BTU/Hour	Ship Weight [†]	List Price
FTBX-S2	1395 x 535 x 90 mm	240	630	59 kg	£3555
FTBX-S3	2053 x 535 x 90 mm	240	930	83 kg	4119
All models utilize F	R-404A Refrigerant.				

[†]Shipping weights are approximate.

CE Mark not available.

All Remote Slim Drop-In Frost Top Models with Control Panel Feature:

Models Shipped with: Electronic temperature control, TXV valve (shipped loose) and a solenoid valve attached to bottom of unit.

ACCESSORIES (available for purchase at any time)				
ALUM PAN	Half-Size Sheet Pan – 457 W x 330 D mm	£20		
18" SHEET PAN	Full-Size Sheet Pan – 457 W x 660 D mm	29		

COUNTERTOP CUT-OUT DIMENSIONS – PAGE 89

<u>F T B X - S x</u>						
Frost Top	Full-Size Sheet Pan Capacity					
Drop-In	No Character = Standard					
X = Control Panel Only —	S = Slim					





REMOTE DROP-IN REFRIGERATED WELLS COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
CWBX-1	435 mm	457 mm	640 mm	660 mm
CWBX-2	765 mm	787 mm	640 mm	660 mm
CWBX-3	1095 mm	1118 mm	640 mm	660 mm
CWBX-4	1426 mm	1448 mm	640 mm	660 mm
CWBX-5	1756 mm	1778 mm	640 mm	660 mm
CWBX-6	2086 mm	2108 mm	640 mm	660 mm

Wells



Remote Refrigerated Drop-In Wells

Hatco's Remote Refrigerated Drop-In Wells keep pre-chilled food products at safe-serving temperatures, but in a remote configuration that offers unlimited flexibility for your own particular dining design needs.

- Full-size, insulated wells available in 1- to 6-pan configurations
- NSF 7 Component approved cold wall construction utilizes R-404A refrigerant, keeping food cold without drying it out
- Optimal insulation on sides and bottom to ensure better cold retention. Environmentally-friendly insulation used throughout
- Models include a control panel (shipped loose - probe wires are 4.9 meters) but without a condensing unit for the increased flexibility of multiple cold well configurations
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- 1" NPT brass drain simplifies cleaning

CWBX-6 with accessory food pans and pan support bars (shipped without condensing unit)



REMOTE REFRIGERATED DROP-IN FULL-SIZE MODELS - WITH REMOTE CONTROL PANEL

	Dimensions				
Model	W x D x H	Voltage	BTU/Hour	Ship Weight	List Price
CWBX-1	483 x 686 x 305 mm	240	330	43 kg	£2874
CWBX-2	813 x 686 x 305 mm	240	630	56 kg	3125
CWBX-3	1143 x 686 x 305 mm	240	930	68 kg	3423
CWBX-4	1473 x 686 x 305 mm	240	1230	80 kg	3606
CWBX-5	1803 x 686 x 305 mm	240	1530	96 kg	3879
CWBX-6	2134 x 686 x 305 mm	240	1830	113 kg	4176

All models utilize R-404A Refrigerant.

CE Mark not available.

All Remote Refrigerated Drop-In Well Models with Control Panel Feature:

Models Shipped with: Electronic temperature control, TXV valve (shipped loose) and a solenoid valve attached to well.

OPTIONS (available at time of purchase only)


CWBR-1SLANT	Slant Option for CWBX-1	£148
CWBR-2SLANT	Slant Option for CWBX-2	160
CWBR-3SLANT	Slant Option for CWBX-3	172
CWBR-4SLANT	Slant Option for CWBX-4	184
CWBR-5SLANT	Slant Option for CWBX-5	196
CWBR-6SLANT	Slant Option for CWBX-6	208


ACCESSORIES (available for purchase at any time)

False Bottom for Drop-In Refrigerated Wells (Perforated False Bottom Accessory, choose your appropriate pan size) –

CWB-3FB For CWBX-3 (2-Part Accessory) 1 CWB-4FB For CWBX-4 (2-Part Accessory) 1 CWB-5FB For CWBX-5 (3-Part Accessory) 2	CWB-1FB	CWBX-1 (1-Part Accessory)	£54
CWB-4FB For CWBX-4 (2-Part Accessory) 1 CWB-5FB For CWBX-5 (3-Part Accessory) 2	CWB-2FB	CWBX-2 (1-Part Accessory)	102
CWB-5FB For CWBX-5 (3-Part Accessory) 2	CWB-3FB	CWBX-3 (2-Part Accessory)	149
	CWB-4FB	CWBX-4 (2-Part Accessory)	195
CWD CED For CWDV C (2 Dort Accordent)	CWB-5FB	CWBX-5 (3-Part Accessory)	243
CWD-OFD FOI CWDX-6 (3-Pail Accessory) Z	CWB-6FB	CWBX-6 (3-Part Accessory)	290

COUNTERTOP CUT-OUT DIMENSIONS – PAGE 91 ACCESSORIES – PAGES 106-107



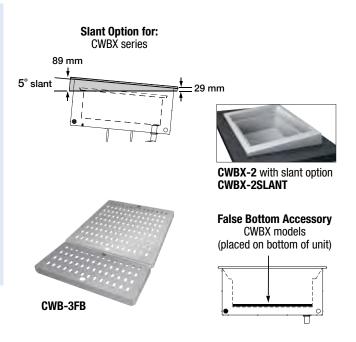

Heat-Max Round Heated Wells

The multipurpose dry Heated Well from Hatco offers the flexibility of food warmers, soup kettles, Bain-Marie heaters, steamers and pasta cookers all in one! With a range of temperature settings, Heat-Max can boil pasta and soup noodles, steam dim sum and warm and hold soups, curry, gravies and toppings at safe-serving temperatures.

- Three temperature setpoints from 50°C to 100°C for holding or warming, steaming and boiling
- Low power mode allows energy efficiency
- Single built-in model available (one 10-liter round pan)
- Freestanding units available as a single (one 10-liter round pan) or dual model (two 10-liter round pans) with individually-controlled pans








RHW-1B includes one well with 10-liter pot and hinged lid (ladle not included)

Liet



RHW-1 includes one well with 10-liter pot and hinged lid

RHW-2 includes two wells with two 10-liter pots and hinged lids (not shown)



FREESTANDING ROUND HEATED WELLS Dimensions Model WxDxH

	Model	W x D x H	Single Phase	kW	Ship Weight	Price
~	RHW-1	359 x 330 x 355 mm	240	1.3	9 kg	£418
~	RHW-2	630 x 330 x 355 mm	240	2.5	16 kg	715

Voltago

All Freestanding Round Heated Well Models Feature:

Liquid Capacity: RHW-1: 10 liter pot. Actual pot capacity: 6 liters for boiling application or 8 liters for warming application. RHW-2: 2 x 10 liter pots. Actual pot capacity: 2 x 6 liters for boiling application or 2 x 8 liters for warming application.

RHW-1 Shipped with: One food holding pot and one pot lid.

RHW-2 Shipped with: Two food holding pots and two pot lids. Cord Location: 1829 mm cord and plug, back of unit.

BUILT-IN ROUND HEATED WELL


		Dimensions	Voltage			List
	Model	W x D x H	Single Phase	kW	Ship Weight	Price
~	RHW-1B	360 x 330 x 341 mm	240	1.3	10 kg	£418

All Built-In Round Heated Well Models Feature:

Liquid Capacity: 10 liters. Actual pot capacity: 6 liters for boiling application or 8 liters for warming application. RHW-1B Shipped with: One food holding pan, one pan lid and remote control.

Cord Location: 1422 mm cable from well to control box with a 1829 mm cord and plug located at the back of the control box. Recommended Well Cut-Out Size: 305 mm diameter.







Heat-Max Rectangular Heated Wells

RCTHW-1

Now a wet Rectangular Hatco Heated Well that is a rethermalizer, a steamer or a Heated Well with a choice of a freestanding or a built-in model. An ideal Heat-Max Well for heating and holding your fresh or previously prepared foods at safe-serving temperatures.

- Three temperature setpoints from 50°C to 100°C for warming, steaming and boiling
- Low power mode allows energy efficiency
- · Freestanding or built-in models
- Accessories include a soup kettle plate, a sauce warmer plate, pasta cooker plate, noodle basket and various round pans with lids

RCTHW-1B

C Stock Item page 110

RCTHW-6 with pasta cooker plate (not shown, see below)





RCTHW-6B with pasta cooker plate (not shown, see below)

Stock Items

Ship


		- V	Stock Ite	m page 110			
FREESTANDIN	G RECTANGULAR HEA	ATED W	/ELL		FREESTA	NDING PASTA COO	KER
Model	Dimensions W x D x H	kW	Ship Weight	List Price	Model	Dimensions W x D x H	kW
RCTHW-1	368 x 611 x 283 mm	3	12 kg	£513	RCTHW-6	368 x 610 x 282 mm	6
oltage: 240V single	ectangular Models Feature phase. mm cord and plug, back of				BUILT-IN	PASTA COOKER	
	ANGULAR HEATED W				Model	Dimensions W x D x H	kW
Model	Dimensions W x D x H	kW	Ship Weight	List Price		390 x 610 x 301 mm okers Feature: V, single phase.	6
✓ RCTHW-1B	368 x 582 x 226 mm	3	13 kg	£485		/400V, three phase.	
oltage: 240V, single CTHW-1B Shipped Ford Location: 1420 and p Recommended Well	Index Models Feature: phase. with: Remote control. mm cable from well to cont lug located at the back of th Cut-Out Size: 550 mm W × RIES (available for purc	e control 344 mm	box. D.	n cord	RCTHW-6B S Power Locat	ipped with: Auto-fill and I Shipped with: Auto-fill, rer cable from v ion: Located on bottom of led Well Cut-Out Size: 57	note co well to well, n
✓ RCTHW-SK	RCTHW Soup Ket					£ 118	
✓ RCTHW-SW ✓ RCTHW-SP	RCTHW Bain-Mai RCTHW Steamer			e (4-Liter Pot not	included)	<u> </u>	
✓ RCTHW-SP	RCTHW Steamer					<u> </u>	
✓ RCTHW-BAS			-	eel Handle		20	
✓ 4QT-PAN	4-Liter Round Pa					64	
	4 1 11 41 1 1 1 1 1						

WxDxH kW Weight List Price HW-6 368 x 610 x 282 mm 6 15 kg £890 LT-IN PASTA COOKER Dimensions Ship kW List Price el WxDxH Weight HW-6B 390 x 610 x 301 mm 17 kg £927 6 sta Cookers Feature: e: 230V, single phase. 230/400V, three phase

N-6 Shipped with: Auto-fill and RCTHW-PC.

N-6B Shipped with: Auto-fill, remote control, RCTHW-PC and 1420 mm cable from well to control box.

Location: Located on bottom of well, no cord supplied. nmended Well Cut-Out Size: 570 mm W x 344 mm D.

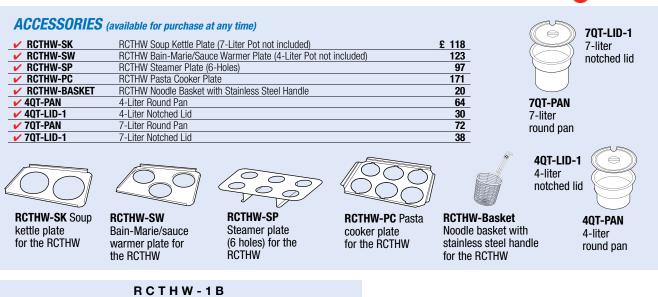


R C T H W - 1 Rectangular Heated Well 1 = 1 Full-Size Pan Capacity 6 = 6 Kilowatt Model



No Character = Freestanding B = Built-In with Remote Control



Modular/Ganged Heated Wells (Full and 4/3-Size) Ordering Instructions

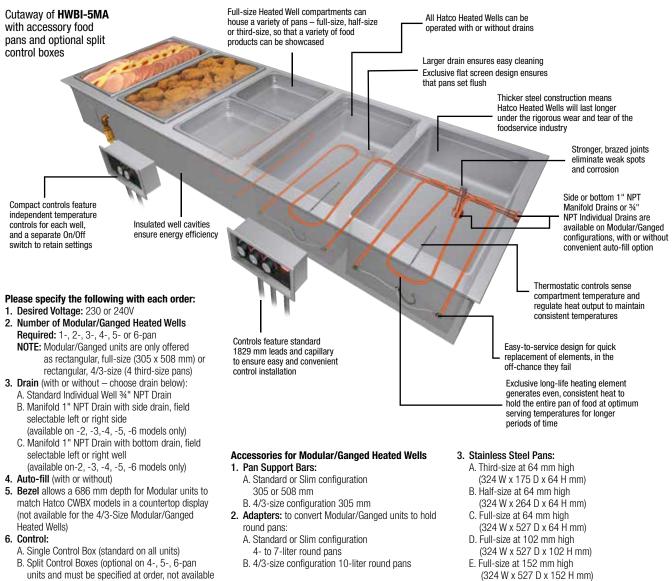

4. Valves:

- 1" or 3/4" NPT Ball Valve
- 1" or ¾" NPT Gate Valve

ACCESSORIES - PAGES 106-107

DROP-IN MODULAR/GANGED HEATED WELLS COUNTERTOP CUTOUTS

on 1-, 2-, 3-pan units)

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWBI-1 Series	359 mm	368 mm	565 mm	575 mm
HWBI-2 Series	715 mm	724 mm	565 mm	575 mm
HWBI-3 Series	1070 mm	1080 mm	565 mm	575 mm
HWBI-4 Series	1426 mm	1435 mm	565 mm	575 mm
HWBI-5 Series	1781 mm	1791 mm	565 mm	575 mm
HWBI-6 Series	2137 mm	2146 mm	565 mm	575 mm

DROP-IN MODULAR/GANGED 4/3-SIZE HEATED WELLS COUNTERTOP CUTOUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth	
HWBI43-1 Series	361 mm	367 mm	740 mm	746 mm	
HWBI43-2 Series	716 mm	721 mm	740 mm	746 mm	
HWBI43-3 Series	1072 mm	1077 mm	740 mm	746 mm	
HWBI43-4 Series	1428 mm	1432 mm	740 mm	746 mm	
HWBI43-5 Series	1783 mm	1788 mm	740 mm	746 mm	
HWBI43-6 Series	2139 mm	2143 mm	740 mm	746 mm	

Wells



Modular/Ganged Heated Wells

Hatco Modular/Ganged Heated Wells are full-size units that are grouped together in a modular fashion to provide customers with a complete steam table contained within one piece of equipment for a clean, integrated look. Select the configuration that's right for your foodservice operation.

- Full-size, insulated Wells available in 1- to 6-Modular/Ganged units
- Individual thermostatic controls for each well provide the ultimate in temperature regulation
- 1829 mm conduit is standard for convenient placement of controls
- Wells empty quickly and easily with a manifold drain option
- Auto-fill option to automatically fill and replenish water without user maintenance and intervention
- Separate well assemblies with independent access to each one for easy service



HWBI-5MA with standard single control box and accessory food pans

DROP-IN MODULAR/GANGED SIZE RECTANGULAR MODELS - INSULATED - TOP MOUNT

	Dimensions				
Model	W x D x H	Voltage	Watts	Ship Weight	List Price
HWBI-1	394 x 600 x 243 mm	230 or 240	1215	17 kg	£ 741
HWBI-1D	394 x 600 x 243 mm	230 or 240	1215	17 kg	785
HWBI-1DA	394 x 600 x 243 mm	230 or 240	1215	17 kg	1109
HWBI-2	749 x 600 x 243 mm	230 or 240	2415	33 kg	1590
HWBI-2D	749 x 600 x 243 mm	230 or 240	2415	35 kg	1674
HWBI-2DA*	749 x 600 x 243 mm	230 or 240	2415	40 kg	1999
HWBI-2M	749 x 600 x 243 mm	230 or 240	2415	34 kg	1704
HWBI-2MA	749 x 600 x 243 mm	230 or 240	2415	39 kg	2139
HWBI-3	1105 x 600 x 243 mm	230 or 240	3615	47 kg	1977
HWBI-3D	1105 x 600 x 243 mm	230 or 240	3615	45 kg	2125
HWBI-3DA*	1105 x 600 x 243 mm	230 or 240	3615	51 kg	2452
HWBI-3M	1105 x 600 x 243 mm	230 or 240	3615	49 kg	2261
HWBI-3MA	1105 x 600 x 243 mm	230 or 240	3615	51 kg	2694
HWBI-4	1461 x 600 x 243 mm	230 or 240	4815	60 kg	2563
HWBI-4D	1461 x 600 x 243 mm	230 or 240	4815	62 kg	2832
HWBI-4DA*	1461 x 600 x 243 mm	230 or 240	4815	60 kg	3156
HWBI-4M	1461 x 600 x 243 mm	230 or 240	4815	63 kg	3058
HWBI-4MA	1461 x 600 x 243 mm	230 or 240	4815	63 kg	3489
HWBI-5	1816 x 600 x 243 mm	230 or 240	6015	76 kg	3077
HWBI-5D	1816 x 600 x 243 mm	230 or 240	6015	75 kg	3533
HWBI-5DA*	1816 x 600 x 243 mm	230 or 240	6015	76 kg	3860
HWBI-5M	1816 x 600 x 243 mm	230 or 240	6015	76 kg	3822
HWBI-5MA	1816 x 600 x 243 mm	230 or 240	6015	75 kg	4258
HWBI-6	2172 x 600 x 243 mm	230 or 240	7215	86 kg	4568
HWBI-6D	2172 x 600 x 243 mm	230 or 240	7215	86 kg	4671
HWBI-6DA*	2172 x 600 x 243 mm	230 or 240	7215	88 kg	4973
HWBI-6M	2172 x 600 x 243 mm	230 or 240	7215	86 kg	5102
HWBI-6MA	2172 x 600 x 243 mm	230 or 240	7215	89 kg	5381

* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged Rectangular Heated Well Models Feature:

Voltage: Single phase.


Models Shipped with: EZ locking hardware for installation and remote thermostats with flexible conduits and lighted power switches.

OPTIONS (available at time of purchase only)				
HWBI-SIDE	Copper Manifold Drain with side exit (not available on HWBI-1)	No Charge		
HWBI-				
BOTTOM	Copper Manifold Drain with bottom exit (not available on HWBI-1)	No Charge		
OS-BEZEL	686 mm depth Bezel for Modular unit to match Hatco CWBX in a			
	countertop display	No Charge		
	1	No Charge		

COUNTERTOP CUTOUT DIMENSIONS – PAGE 95 Accessories – Pages 106-107



Modular/Ganged Heated Wells Controls*



4-, 5-, 6-Pan Units: Single control boxes are standard. If optional split control boxes are desired, it must be specified at order.





Drop-In Modular/ Ganged 4/3-Size Heated Wells

Hatco Modular/Ganged 4/3-Size Heated Wells maintain hot food at safe serving temperatures, with better quality construction, longer holding times and more accurate temperatures. A deeper single unit can hold the equivalent of 4 third-size pans. Choose the number of wells, from 1 to 6 unit configurations, as well as voltage, auto-fill, controls and drain options. Each well has its own individual control to regulate the temperature of each food offering.


- Longer holding times with more accurate temperatures
- Separate lighted On/Off rocker switch and temperature dial for easy operation
- 50% larger drain with flat screen simplifies cleaning and holds pans level
- Unique design allows quick change of element or thermostat if needed
- EZ locking hardware for quick installation
- Stainless steel construction and solid brazed drain fitting joints for durability
- A 1829 mm conduit is included for convenient placement of controls



HWBI43-3DA with

- 4 third-size pans, 2 half-size pans and one third-size pan
- 1 full-size pan and 1 third-size pan

Modular/Ganged



*4-, 5-, 6-pan units: Single control box is standard. If optional split control boxes are desired, it must be specified at order.



	Dimensions			Ship	
Model	W x D x H	Voltage	Watts	Weight	List Price
HWBI43-1	394 x 772 x 244 mm	230 or 240	1215	19 kg	£1108
HWBI43-1D	394 x 772 x 244 mm	230 or 240	1215	19 kg	1141
HWBI43-1DA	394 x 772 x 244 mm	230 or 240	1215	19 kg	1551
HWBI43-2	749 x 772 x 244 mm	230 or 240	2415	37 kg	1852
HWBI43-2D	749 x 772 x 244 mm	230 or 240	2415	39 kg	1920
HWBI43-2DA*	749 x 772 x 244 mm	230 or 240	2415	43 kg	2346
HWBI43-2M	749 x 772 x 244 mm	230 or 240	2415	37 kg	2105
HWBI43-2MA	749 x 772 x 244 mm	230 or 240	2415	42 kg	2531
HWBI43-3	1105 x 772 x 244 mm	230 or 240	3615	52 kg	2526
HWBI43-3D	1105 x 772 x 244 mm	230 or 240	3615	51 kg	2627
HWBI43-3DA*	1105 x 772 x 244 mm	230 or 240	3615	56 kg	3041
HWBI43-3M	1105 x 772 x 244 mm	230 or 240	3615	54 kg.	2840
HWBI43-3MA	1105 x 772 x 244 mm	230 or 240	3615	56 kg	3249
HWBI43-4	1461 x 772 x 244 mm	230 or 240	4815	67 kg	3326
HWBI43-4D	1461 x 772 x 244 mm	230 or 240	4815	69 kg	3459
HWBI43-4DA*	1461 x 772 x 244 mm	230 or 240	4815	68 kg	3873
HWBI43-4M	1461 x 772 x 244 mm	230 or 240	4815	70 kg	3700
HWBI43-4MA	1461 x 772 x 244 mm	230 or 240	4815	70 kg	4114
HWBI43-5	1816 x 772 x 244 mm	230 or 240	6015	85 kg	4052
HWBI43-5D	1816 x 772 x 244 mm	230 or 240	6015	84 kg	4224
HWBI43-5DA*	1816 x 772 x 244 mm	230 or 240	6015	85 kg	4650
HWBI43-5M	1816 x 772 x 244 mm	230 or 240	6015	84 kg	4499
HWBI43-5MA	1816 x 772 x 244 mm	230 or 240	6015	84 kg	4825
HWBI43-6	2172 x 772 x 244 mm	230 or 240	7215	97 kg	4850
HWBI43-6D	2172 x 772 x 244 mm	230 or 240	7215	97 kg	5067
HWBI43-6DA*	2172 x 772 x 244 mm	230 or 240	7215	98 kg	5514
HWBI43-6M	2172 x 772 x 244 mm	230 or 240	7215	97 kg	5425
HWBI43-6MA	2172 x 772 x 244 mm	230 or 240	7215	100 kg	5868


* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged 4/3-Size Rectangular Heated Well Models Feature: Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with flexible conduits and lighted power switches.

OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold Drain with side exit	No Charge
HWBI-BOTTOM	Copper Manifold Drain with bottom exit	No Charge




COUNTERTOP CUTOUT DIMENSIONS – PAGE 95 Accessories – Pages 106-107



July 1, 2019

Modular/Ganged Slim Heated Wells Ordering Instructions

Cutaway of HWBI-S4MA with accessory food pans and optional split control boxes

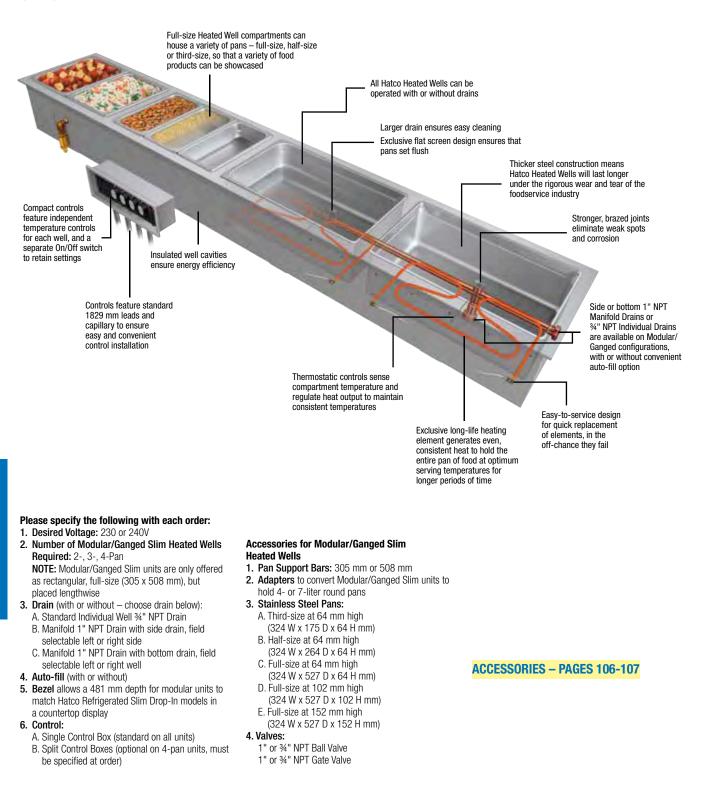

DROP-IN MODULAR/GANGED SLIM HEATED WELLS COUNTERTOP CUTOUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWBI-S2	1121 mm	1127 mm	362 mm	368 mm
HWBI-S3	1680 mm	1686 mm	362 mm	368 mm
HWBI-S4	2238 mm	2245 mm	362 mm	368 mm





Modular/Ganged Slim Heated Wells

Hatco Modular/Ganged Slim Heated Wells are full-sized units that are grouped together in a modular fashion but placed lengthwise. This provides customers with a complete steam table within easy reach, regardless of the sneeze guards. Select the configuration that's right for your foodservice operation.

- Full-size, insulated wells available in 2- to 4-Modular/Ganged units
- Individual thermostatic controls for each well provide the ultimate in temperature regulation
- 1829 mm conduit is standard for convenient placement of controls
- Wells empty quickly and easily with a manifold drain option
- Auto-fill option to automatically fill and replenish water without user maintenance and intervention
- Separate well assemblies with independent access to each one for easy service



DROP-IN MODULAR/GANGED SLIM RECTANGULAR MODELS – INSULATED – TOP MOUNT

	Dimensions				
Model	W x D x H	Voltage	Watts	Ship Weight	List Price
HWBI-S2	1156 x 397 x 238 mm	230 or 240	2415	38 kg	£1722
HWBI-S2D	1156 x 397 x 238 mm	230 or 240	2415	37 kg	1798
HWBI-S2DA*	1156 x 397 x 238 mm	230 or 240	2415	37 kg	2122
HWBI-S2M	1156 x 397 x 238 mm	230 or 240	2415	38 kg	1865
HWBI-S2MA	1156 x 397 x 238 mm	230 or 240	2415	41 kg	2298
HWBI-S3	1715 x 397 x 238 mm	230 or 240	3615	54 kg	2165
HWBI-S3D	1715 x 397 x 238 mm	230 or 240	3615	52 kg	2324
HWBI-S3DA*	1715 x 397 x 238 mm	230 or 240	3615	57 kg	2648
HWBI-S3M	1715 x 397 x 238 mm	230 or 240	3615	57 kg	2477
HWBI-S3MA	1715 x 397 x 238 mm	230 or 240	3615	57 kg	2913
HWBI-S4	2273 x 397 x 238 mm	230 or 240	4815	70 kg	2870
HWBI-S4D	2273 x 397 x 238 mm	230 or 240	4815	70 kg	3106
HWBI-S4DA*	2273 x 397 x 238 mm	230 or 240	4815	73 kg	3431
HWBI-S4M	2273 x 397 x 238 mm	230 or 240	4815	70 kg	3344
HWBI-S4MA	2273 x 397 x 238 mm	230 or 240	4815	69 kg	3778

* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged Slim Rectangular Heated Well Models Feature:


Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with lighted power switches.


OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold Drain with side exit	No Charge
HWBI-BOTTOM	Copper Manifold Drain with bottom exit	No Charge
	481 mm depth Bezel for Modular unit to match	
OS-BEZEL	Hatco CWB Slim models in a countertop display	No Charge

COUNTERTOP CUTOUT DIMENSIONS – PAGE 98 Accessories – Pages 106-107



Modular/Ganged Slim Heated Wells Controls*



*4-Pan Units: Single control box is standard. If optional split control boxes are desired, it must be specified at order.



July 1, 2019

Individual Built-In And Drop-In Heated Wells **Ordering Instructions**

HWBI-FULD with accessory

Please specify the following with each order:

- 1. Desired Voltage: 240V
- 2. Base Size of Heated Well:
- A. Rectangular: Full (305 x 508 mm)
- or 4/3 (305 x 686 mm)
- B. Round: 4-liter, 7-liter or 10-liter
- 3. Drain (with or without)
- 4. Auto-fill (with or without)
- 5. Insulated or Uninsulated



6. Mounting Style: A. Top Mounted

units only)

7. Wattage: Standard or high watt NOTE: Round Heated Wells are only available in

food pan Insulated Well Construction Full-size models are

available with insulation

for energy savings

HWBIB-FULD with accessory food pan Thicker gauge steel construction means Hatco Heated Wells will last longer under the rigorous wear and tear of the foodservice industry

Insulated well cavities ensure

energy efficiency



HWB-FULD with accessory food pan (unit depth is 553 mm)



B. Bottom Mounted (rectangular full-size

standard and high watt configurations,

4-liter available in standard watt only)

Top Mounted Heated Well: Unit is mounted through the top surface of a sheet metal counter and secured with turn tabs (unit and food pan edge visible)



Bottom Mounted Heated Well: Full-size (only) unit is mounted to the bottom surface of a sheet metal counter and secured with customer provided turned bends and fasteners (food pan edge visible)

4 third-size pans - unit depth is 726 mm)

HWBI-11QT with accessory

food pan

HWB-43D with accessory food pans (single unit holding

All Hatco Heated Wells can be ordered with or without drains (50% larger drain with exclusive flat screen ensures the pans set flush)



Easy to access the heating elements, if it ever becomes necessary to change them



CONTROL BOXES, COUNTERTOP CUT-OUT DIMENSIONS – PAGE 101

HWBxxx-xDA						
Heated Well Built-In	No Character = No Auto-Fill A = Auto-Fill Equipped					
No Character = Standard Wattage	No Character = No Drain D = Drain Equipped					
No Character = Not Uninsulated	FUL = Full-Size Pan					
I = Insulated Top Mount IB = Insulated Bottom Mount	43 = 4/3-Size Pan 4QT = Round 4-Liter Pan					
RT = Thermostatic Control (Fabricator Only)	7QT = Round 7-Liter Pan					
RN = Infinite Switch Control (Fabricator Only)	11QT = Round 10-Liter Pan					

UK Price List Telephone: 01509 260 140 hatcocorp.com

Individual Built-In And Drop-In Heated Wells **Ordering Instructions**

Options for Individual Built-In and Drop-In . Heated Wells

1. Control Box:

- A. Standard Larger (front mounted) Recessed Thermostatic Control Box with Lighted On/Off Rocker Switch and Angled Recessed Controls for easy readability (not available for auto-fill)
- B. Optional ITC Control (not available for auto-fill, 4-liter Round Wells, Insulated Round Wells or units without a drain)
- C. Standard Control for auto-fill models only
- 2. Control Type:
 - A. Thermostatic
 - B. Infinite
 - NOTE: Infinite controls are only available on fabricator units
- 3. Leads NOTE: Extended high temp lead wire, per 305 mm only available on infinite control fabricator units
- 4. Thermostat with 1829 mm Capillary (914 mm standard)

Accessories for Individual Built-In and Drop-In **Heated Wells**

- 1.Mounting Kits for combustible countertops (Individual Drop-In Top Mount units only)
- 2. Pan Support Bars: 305 mm or 508 mm
- 3. Adapters to convert rectangular full-size units to hold 4- or 7-liter round pans, or 4/3-size units to hold 10-liter round pans
- 4. Stainless Steel Pans:
 - A. Third-size at 64 mm high (324 W x 175 D x 64 H mm)
 - B. Half-size at 64 mm high
 - (324 W x 264 D x 64 H mm)
 - C. Full-size at 64 mm high (324 W x 527 D x 64 H mm)
 - D. Full-size at 102 mm high (324 W x 527 D x 102 H mm)
 - E. Full-size at 152 mm high (324 W x 527 D x 152 H mm)
- 5. Valves:
- A. 1" or ¾" NPT Ball Valve for unit with Drain B. 1" or ¾" NPT Gate Valve for unit with Drain
- 6. Remote Handle for 3/4" Drains only and includes a Ball Valve

ACCESSORIES – PAGES 106-107







(not for auto-fill, 4-liter Round Wells, Insulated Rounds Wells or units wthout a drain)



HWB-43DA. HWBIB-. HWBI-FULDA Standard Control (only for auto-fill)

CONTROL CUTOUT DIMENSIONS

Standard Larger Recessed Thermostatic Control:



How to Order a Hatco Heated Well in Video

Hatco has given you a variety of simple and easy ways to order your well. You can read the Ordering Instructions here or watch a video "How to Order a Hatco Heated Well." Go to hatcocorp.com and click on the Video Library. While you are here, watch the "Hatco Refrigerated Wells" video as well.

Well

BUILT-IN AND DROP-IN HEATED WELLS COUNTERTOP CUTOUTS

			010010	
Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWB-FUL	321 mm	328 mm	524 mm	532 mm
HWB-FUL ⁺	356 mm	362 mm	559 mm	565 mm
HWB-FULDA	321 mm	328 mm	524 mm	532 mm
HWB-FULDA ⁺	356 mm	362 mm	559 mm	565 mm
HWBI-FUL, -FULD	324 mm	328 mm	528 mm	531 mm
HWBI-FUL, -FULD ⁺	356 mm	362 mm	559 mm	565 mm
HWBIB-FUL*	306 mm	306 mm	509 mm	509 mm
HWBIB-FULDA*	306 mm	306 mm	509 mm	509 mm
HWB-, HWBI-43	322 mm	329 mm	703 mm	711 mm
HWB-, HWBI-43*	356 mm	362 mm	737 mm	743 mm
HWB-4QT	181 mm Dia.	192 mm Dia.	—	—
HWB-4QT [•]	229 mm	235 mm	229 mm	235 mm
HWB-7QT	232 mm Dia.	243 mm Dia.	—	—
HWB-7QT•	279 mm	286 mm	279 mm	286 mm
HWB-11QT	282 mm Dia.	294 mm Dia.	_	
HWB-11QT ⁺	330 mm	337 mm	330 mm	337 mm

▲ Indicates cutout dimensions for a combustible countertop surface.

Must be flanged.



Build An Individual Built-In Heated Well Configurator Worksheet

Complete the eleven steps on this worksheet to configure your Hatco model code and List Price. In order to get exactly what you need in the least amount of time, have this handy when ordering your Hatco Individual Built-In Heated Well.



BUILD YOUR INDIVIDUAL BUILT-IN HEATED WELL - STEP 1 THROUGH 3 (To determine your total list price and model code, pick all your options)

STEP 1: CERTIFICATION

Raca Cada Siza

STEP 3: ELECTRICAL

Standard

configurations)

Voltage

Wattage –

HWB-

CE Mark	Not available with RN or RT controls	No Charge
Fabricator	No certification. Fabricators will have to obtain certification. Control and conduit not included, using RT or	
	RN controls	No Charge



HWB-FULD with accessory food pan (unit depth is 553 mm)

STEP 2: BASE SIZE OF WELL Chin Woight Lief

Dase ooue	5126	(depending on components)	Price
Rectangular –			
-FUL	Full-Size Pan	16 kg	£524
-43	4/3-Size Pan	17 kg	581
Round –			
-4QT	4-liter	5 kg	£501
-7QT	7-liter	6 kg	501
-11QT	10-liter	6 kg	501

240

(4-Liter Round Wells only

available in standard watt



HWB-7QT with accessory

HWB-43D with accessory food pans (single unit holding 4 thirdsize pans, unit depth is 726 mm)



HWBH-High Go to next page for Steps 4-6.

No Charge

No Charge

HWBI-11QT with accessory food pan

HWBI-7QT with accessory food pan

HWBx х Heated Well Built-In No Character = Standard Wattage H = High Wattage

Wells

FUL = Full-Size Pan

4QT = Round 4-Liter Pan 7QT = Round 7-Liter Pan 11QT = Round 10-Liter Pan

43 = 4/3-Size Pan



Build An Individual Built-In Heated Well Configurator Worksheet Continued from page 102

BUILD YOUR INDIVIDUAL BUILT-IN HEATED WELL – STEP 4 THROUGH 6 (To determine your total list price and model code, pick all your options)








Insulated Well Construction Full-size models are available with insulation for energy savings

STEP 4: INSULATED OR UNISULATED

Insulation Code -





Top Mounted Heated Well: Unit is mounted through the top surface of a sheet metal counter and secured with turn tabs (unit and food pan edge visible)



Bottom Mounted Heated Well: Full-size (only) unit is mounted to the bottom surface of a sheet metal counter and secured with customer provided turned bends and fasteners (food pan edge visible)


STEP 5: MOUNTING STYLE

Mounting Code	_	
No Character	Top Mount	No Charge
	Bottom Mount (Rectangular	
В	full-size units only)	No Charge



STEP 6: DRAIN AND AUTO-FILL Drain Code – No Charage No Character Without Drain No Charge D With Drain £29 Auto-fill Code – No Charage No Character Without Auto-fill No Charge With Auto-fill No Charge With Auto-fill A A (Not available for WM Control) £439

Go to next page for Steps 7-8.

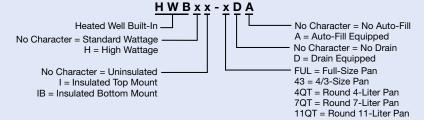


CONTROL BOXES, COUNTERTOP CUT-OUT DIMENSIONS – PAGE 101 ACCESSORIES – PAGES 106-107 COLORS AND FINISHES – INSIDE BACK COVER

UK Price List Telephone: 01509 260 140 hatcocorp.com



Build An Individual Built-In Heated Well Configurator Worksheet Continued from page 103

BUILD YOUR INDIVIDUAL BUILT-IN HEATED WELL – STEP 7 AND 8 (To determine your total list price and model code, pick all your options)

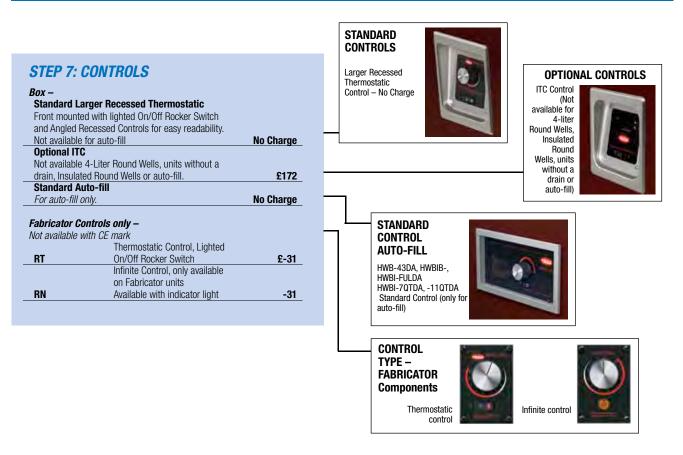

STEP 8: OPTIONAL BEZEL CONTROL COLOR

Bezel Co	ntrol Colors –					
Stainless	Steel (Standard)		No Charge			
Designer Colors						
(Not availa	(Not available for Fush Mount Control Box Bezel or HWB-FUL with Cord)					
Nonstand	ard colors are noi	nreturnable	£27			
RED	Warm Red	NAVY	Navy Blue			
BLACK	Black	GREEN	Hunter Green			
GRAY	Gray Granite	COPPER	Antique Copper			
WHITE	White Granite					

Go to next page for Step 9

OPTIONAL BEZEL COLORS

		a state				
		1 00 0				C. ALCO
Warm Red	Black	Gray	White	Navy Blue	Hunter	Antique
		Granite	Granite		Green	Copper

and Plated Finishes.

Optional ITC control – (not for 4-liter Round Wells or units without drains) shown in optional control box bezel in *Designer* White Granite



HWBxxxx D Heated Well Built-In No Character = No Auto-Fill A = Auto-Fill Equipped No Character = Standard Wattage No Character = No Drain H = High Wattage D = Drain Equipped FUL = Full-Size Pan No Character = Uninsulated I = Insulated Top Mount 43 = 4/3-Size Pan 4QT = Round 4-Liter Pan IB = Insulated Bottom Mount RT = Thermostatic Control (UR Only) 7QT = Round 7-Liter Pan RN = Infinite Switch Control (UR Only) 11QT = Round 11-Liter Pan

Build An Individual Built-In Heated Well Configurator Worksheet Continued from page 104

BUILD YOUR INDIVIDUAL BUILT-IN HEATED WELL – STEP 9 (To determine your total list price and model code, pick all your options)

d Well rom page 104

HWB-FUL with optional cord



STEP 9: POV	VER SUPPLY		
	Power Supply Lead Wire (Lead wire only –		
HWB-LEAD	Conduit not included)	per foot	£6
	Power Supply Lead Wire for "RN" Components (Lead		
HWB-LEAD-UR	wire only – Conduit not included)	per foot	6
	HWB-FUL with Cord Standard		
HWB-CORD	All HWB models except Auto-fill models	add	20
	HWBI-FUL with Cord Standard		
	Top Mount: HWBI-FUL,-FULD and HWBHI-FUL,-FULD		
HWBI-CORD	Bottom Mount: HWBIB-FULDA and HWBHIB-FULDA	add	20
	Thermostat with 1829 mm Capillary (not available for		
HWB-TSTAT	auto-fill models)		51
	Thermostat with 1829 mm Capillary for "RT"		
HWB-TSTAT-UR	Components (Thermostat only – Conduit not included)		36

YOUR TOTAL LIST PRICE AND MODEL CODE HWBxxx-xDA Heated Well Built-In No Character = No Auto-Fill No Character = Standard Wattage A = Auto-Fill Equipped No Character = No Drain H = High Wattage D = Drain Equipped FUL = Full-Size Pan No Character = Uninsulated I = Insulated Top Mount 43 = 4/3-Size Pan 4QT = Round 4-Liter Pan 7QT = Round 7-Liter Pan IB = Insulated Bottom Mount RT = Thermostatic Control (UR Only) 11QT = Round 11-Liter Pan RN = Infinite Switch Control (UR Only) Add the total costs of options below -Certification No Charge Step 1 £ Step 2 Base Size of Well Step 3 Electrical Step 4 Insulated or Uninsulated Step 5 Mounting Style Drain and Auto-fill Step 6 Step 7 Controls Optional Bezel Control Color Step 8 Step 9 Power Supply £ **Your Total Price**


CONTROL BOXES, COUNTERTOP CUT-OUT DIMENSIONS – PAGE 101 ACCESSORIES – PAGES 106-107 COLORS AND FINISHES – INSIDE BACK COVER




105



Wells Accessories (available for purchase at any time)

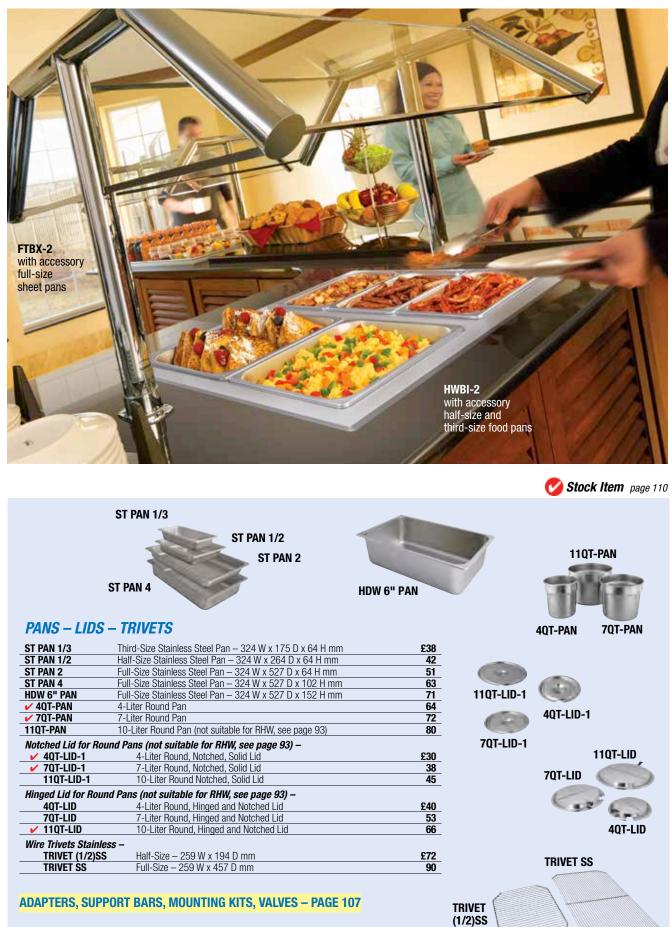



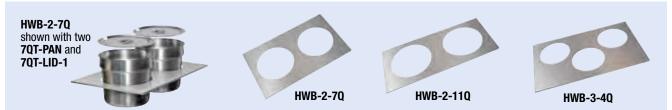


ADAPTERS - SUPPORT BARS

HWB-2-7Q	Adapter to convert warmer to hold two 7-Liter Inserts	
	(models HWBI & HWB-FUL series only)	£58
HWB-3-4Q	Adapter to convert warmer to hold three 4-Liter Inserts	
	(models HWBI & HWB-FUL series only)	58
HWB-2-11Q	Adapter to convert warmer to hold two 10-Liter Inserts (model HWB-43 series only)	71
HWB12BAR	305 mm Pan Support Bar for Built-In and Drop-In Heated Wells	10
HWB20BAR	508 mm Pan Support Bar for Built-In and Drop-In Heated Wells	14
HWBGM12BAR	305 mm Pan Support Bar for Drop-In Modular/Ganged Models	10
HWBGM20BAR	508 mm Pan Support Bar for Drop-In Modular/Ganged Models	14
CWB12BAR	305 mm Pan Support Bar for Drop-In Refrigerated Wells	10
CWB20BAR	508 mm Pan Support Bar for Drop-In Refrigerated Wells	14

False Bottom for Drop-In Refrigerated Wells

(Perforated False Bottom Accessory, choose your appropriate pan size) -

CWB-1FB	For CWB-1 (1-Part Accessory)	£ 54
CWB-2FB	For CWB-2 (1-Part Accessory)	102
CWB-3FB	For CWB-3 (2-Part Accessory)	149
CWB-4FB	For CWB-4 (2-Part Accessory)	195
CWB-5FB	For CWB-5 (3-Part Accessory)	243
CWB-6FB	For CWB-6 (3-Part Accessory)	290

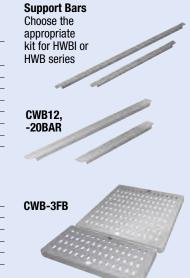



Choose the appropriate kit for HWB-FUL, HWB-43 or HWB-4Q, -7Q, -11Q series



HWB-MNT-REC or HWB-MNT-RND



MOUNTING KITS – VALVES

Necessary at your Well installation -

necessary at your i		
HWB-FUL-MNT	Mounting Kit for combustible countertops for HWB-FUL series only	£71
HWB-43-MNT	Mounting Kit for combustible countertops for HWB-43 series only	85
HWB-4Q-MNT	Mounting Kit for combustible countertops for HWB-4Q series only	42
HWB-7Q-MNT	Mounting Kit for combustible countertops for HWB-7Q series only	46
HWB-11Q-MNT	Mounting Kit for combustible countertops for HWB-11Q series only	50
HWB-MNT-REC	Kit allows mounting to thick countertops - 8 Brackets (HWBI and	
	HWB Rectangular Heated Wells only)	50
HWB-MNT-RND	Kit allows mounting to thick countertops - 4 Brackets (Round Heated Wells only)	25
		20
External Manifold		
External Manifold HWBI2MANIF	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory	ls) –
	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode	
HWBI2MANIF	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory	<i>ls) –</i> £ 499 707
HWBI2MANIF HWBI3MANIF	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory 3-Pan Accessory	<i>ls) –</i> £ 499 707 916
HWBI2MANIF HWBI3MANIF HWBI4MANIF	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory 3-Pan Accessory 4-Pan Accessory	<i>ls) –</i> £ 499 707 916 1124
HWB12MANIF HWB13MANIF HWB14MANIF HWB15MANIF HWB16MANIF	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory 3-Pan Accessory 4-Pan Accessory 5-Pan Accessory 6-Pan Accessory	<i>ls) –</i> £ 499 707 916 1124
HWBI2MANIF HWBI3MANIF HWBI4MANIF HWBI5MANIF HWBI6MANIF	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory 3-Pan Accessory 4-Pan Accessory 5-Pan Accessory	<i>ls) –</i> <u>£ 499</u> 707 916 1124 1331
HWBI2MANIF HWBI3MANIF HWBI4MANIF HWBI5MANIF HWBI6MANIF Necessary at your	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory 3-Pan Accessory 4-Pan Accessory 5-Pan Accessory 6-Pan Accessory • Well installation –	<i>ls) –</i> £ 499 707 916 1124 1331 £ 63
HWBI2MANIF HWBI3MANIF HWBI4MANIF HWBI5MANIF HWBI6MANIF Necessary at your BALLVALVE3/4	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory 3-Pan Accessory 4-Pan Accessory 5-Pan Accessory 6-Pan Accessory Well installation – High Temperature ¾" NPT Ball Valve for units with Individual Drain(s) and no Manifold	ls) – £ 499 707 916 1124 1331 £ 63 49
HWBI2MANIF HWBI3MANIF HWBI4MANIF HWBI5MANIF HWBI6MANIF Necessary at your BALLVALVE3/4 BALLVALVE1INCH	includes Individual Ball Valve for each Well (HWBI only, not available for the Slim mode 2-Pan Accessory 3-Pan Accessory 4-Pan Accessory 5-Pan Accessory 6-Pan Accessory Well installation – High Temperature ³ / ₄ " NPT Ball Valve for units with Individual Drain(s) and no Manifold High Temperature 1" NPT Ball Valve for units with Manifold Drain (Ganged Heated Wells only)	<i>ls) –</i> £ 499



BALLVALVE1INCH

GATEVALVE1INCH

HWB-RDHV Attaches to 3/4" drain and includes a ball valve





General Information

Price Policy: Prices are in \pounds Sterling and are subject to change without notice. Prices and discounts apply to accessories at time of initial equipment order only, not when ordered at a later date.

Remittance: Please remit in £Sterling to:

JPMorgan Chase Bank N.A. London, P.O. Box 4972 1 Chaseside, Bournemouth BH7 7WH, United Kingdom. BACS Instructions: Sort Code: 60-92-42 Credit

Hatco Acct. No: 77065902 Note: Include Hatco invoice on remittance details

Shipment: Shipments originate in Leicestershire, UK

ALL HATCO PRODUCTS SHIPPED WITH INSTALLATION AND OPERATING INSTRUCTIONS. CONSULT LOCAL CODES BEFORE INSTALLING EQUIPMENT.

Ordering Procedures

CUSTOMER NOTE -

To ensure prompt and accurate processing of your order, please provide the following information:

ALL PRODUCTS -

1. Model number, voltage and phase.

- 2. Specify options and accessories as required. Options are not retrofittable.
- 3. Consult Hatco C/o Gamble Foodservice Solutions when ordering equipment for special applications.

E-mail orders to: sales@gamblefs.co.uk

Fax orders to: 01509 260 151

Mail orders to: Hatco Corporation St. George's House Rearsby Business Park Gaddesby Lane Rearsby Leics LE7 4YH

Telephone: 01509 260 140

www.hatcocorp.com

Hatco products are manufactured for commercial use only. See product specification sheet for the appropriate approvals.

CE

Limited Warranty

For the full information pertaining to the Hatco warranty protection for your equipment, go to our website at:

www.hatcocorp.com

Step 1: make sure you are on your region Step 2: in the **SUPPORT** drop-down, select **WARRANTY**



Returns

No product will be accepted on a return shipment without a Material Return Authorization from Hatco Sales Department. Products returned at customer's convenience are subject to inspection and a restocking charge of 25% of EX-WORKS, freight and related expenses for shipper's account; contact Hatco.

Damaged Freight Policy

All freight should be inspected during the receiving process for possible damage. Should there be a question about the condition of the equipment, it is better to refuse the shipment. If damage is found after delivery, it is the consignee's (receiver) responsibility to notify the carrier within (24) hours of delivery.

All Hatco Shipments specify an Incoterm 2010 in which the shipment was made. Incoterms determine who bears the risk of cargo damage or loss at any given point of shipment and therefore who pays in the event of loss or damage. If it is found that any part of the shipment has sustained damage during transportation, Hatco Corporation must be contacted as well as immediately notifying the last carrier. For assistance, contact Hatco via e-mail at: intlshipping@hatcocorp.com and provide information listed below:

- 1. Hatco Shipment Number
- 2. Delivery date and date damage was discovered
- 3. Contact name, phone number and email address
- 4. Type of unit damaged including model and serial number
- 5. Extent of damage
- 6. Pictures of damage as well as packaging



Stock Items

When you need equipment shipped sooner than our normal lead time, our "Stock Item" program offers over 50 models of our most popular heating and warming equipment in various voltages ready for immediate shipment based on availability. Your order will be

INDUCTION		
Model	Voltage	
Rapide Cuisine [®] Countertop High F	Powered/Heavy Duty	
IRNG-PC1-30	230/240	
IRNG-PB1-30	230/240	
LIGHT COOKING EQUIPMENT	7	
Model	Voltage	
Therm-Max [®] Salamander		
TMS-1	230/400V	
Quick-Therm Salamander		
QTS-1	240/415	

TOASTERS

Model	Description
Toast-Max [®] Conveyor Toa	aster
TM3-10	Stainless Steel, Warm Red or Black Conveyor toaster
TM-5	Conveyor toaster
TM-10	Conveyor toaster
Toast-Qwik [®] Conveyor To	paster
TQ3-500	Conveyor toaster
TQ-405	Conveyor toaster
TQ-805	Conveyor toaster
Accessories	
TQRAMP	Toast ramp
TQ2-SECURITY	Security cover
Toast King® Conveyor Toa	aster
TK-105	Conveyor toaster

DECORATIVE AND DISPLAY LIGHTS

Model	Description
Decorative and Display Lights	
DL-500-RL	In Glossy Gray
DL-750-RL	In Glossy Gray
DL-750-RL	In Bright Nickel
DL-750-RL	In Bright Copper
DL-775-RL	In Bold Black
DL-500-CL	In Bold Black, overall length 1168 mm
DL-500-CL	In Bright Nickel, overall length 1168 mm
DL-500-CL	In Bright Copper, overall length 1168 mm
DL-750-CL	In Bold Black, overall length 1168 mm
DL-725-CL	In Glossy Gray, overall length 1168 mm
Accessories	
WHITE-UCTD-240	250W, 240V uncoated, clear bulb
WHITE-CTD-240	250W, 240 V coated, clear bulb
WHITE-CTD-240L	40W, 240V coated, clear bulb

STRIP HEATERS

Model	Description
Glo-Ray [®] Aluminum Strip He	eater – High Wattage
GRAH-24	With built-in toggle switch and conduit
GRAH-36	With built-in toggle switch and conduit
GRAH-42	With built-in toggle switch and conduit
GRAH-48	With built-in toggle switch and conduit
GRAH-54	With built-in toggle switch and conduit
Glo-Ray [®] Aluminum Strip He	eater with Lights – High Wattage
GRAHL-24	With built-in toggle switch and conduit
GRAHL-36	With built-in toggle switch and conduit
GRAHL-48	With built-in toggle switch and conduit
Accessories	
CL-HIGH	C-Leg stands high watt
ADJ ANGLE	Adjustable Angle Brackets for Single models



shipped the same day if you place it before 1:30 p.m. GMT, or the next business day if ordered after 1:30 p.m. All orders are subject to credit approval. There will be a 6-8 week lead-time on all equipment that does not have the Stock Item check next to the model number.

Model	Description
Glo-Max [®] Foodwarmer	with Metal Sheathed Elements
GMFFL	Designer Black with metal sheathed elements
Ultra-Glo® Foodwarmer	with Ceramic Elements
UGFFBL	Clear Anodized with ceramic heating elements
Glo-Ray [®] Portable Fry H	lolding Station
GRFHS-21	Clear Anodized with ceramic heating elements
Glo-Ray [®] Round Heated	Simulated Stone Shelf with Decorative Lamp
GRSSR20-DL77516	Designer Black with Night Sky Simulated Stone shelf
Heated Black Glass Mo	dular Shelf
HGSM-4060	Stainless Steel housing with black glass
DRAWER WARMERS	S
Model	Description

Model	Description
Freestanding	
HDW-1	With 102 mm legs
HDW-2	With 102 mm legs
HDW-3	With 102 mm legs
Freestanding Narrov	N
HDW-2N	With 102 mm legs
HDW-3N	With 102 mm legs
Built-in	
HDW-1B	
HDW-2B	
Built-in Narrow	
HDW-2BN	
Accessories	
HDW-CASTER-2	51 mm diameter casters – all swivel, 2 lock –
	(adds 57 mm to height of unit) (HDW-1, -2, -3 models only)
HDW-TRIVET	Custom Trivet raises food product
	13 mm off bottom of full-size pan
HDW-SPILL	Water/spillage pan (one per drawer)
HDW-SPLASH	Splash Baffle (one per drawer)

HOLDING AND DISPLAY CABINETS

Model Flav-R-Fresh® Impulse Display Cabinet FDWDE-1X

Description

1 door with multi-purpose rack

HEATED WELLS

Accessory 11QT-LID

10-Liter hinged and notched lid


HEAT MAX HEATED WELLS Model Description **Round Heated Wells** RHW-1 Freestanding RHW-2 Freestanding Built-in RHW-1B Accessories RHW-11QT-POT RHW 10-liter round pan RHW-11QT-LID-HG RHW lid for 10-liter round pan Model Description **Rectangular Heated Wells** RCTHW-1 Freestanding **RCTHW-1B** Built-In Accessories **RCTHW-SK** RCTHW soup kettle plate **RCTHW-SW** RCTHW Bain-Marie sauce warmer plate **RCTHW-SP** RCTHW steamer plate **RCTHW-PC** RCTHW pasta cooker plate **RCTHW-BASKET** RCTHW noodle basket with stainless steel handle 4QT-PAN 4-liter round pan 40T-LID-1 4-liter notched lid 7QT-PAN 7-liter round pan 7QT-LID-1 7-liter notched lid

HAVE A QUESTION? CHAT WITH HATCO



SEE ICON ON RIGHT SIDE OF WEBSITE

Hatco has a wealth of resources to help you choose and order the correct equipment with ease. Log on to the Hatco website: *www.hatcocorp.com* and look under the "Resources" panel on the right hand side of the page.

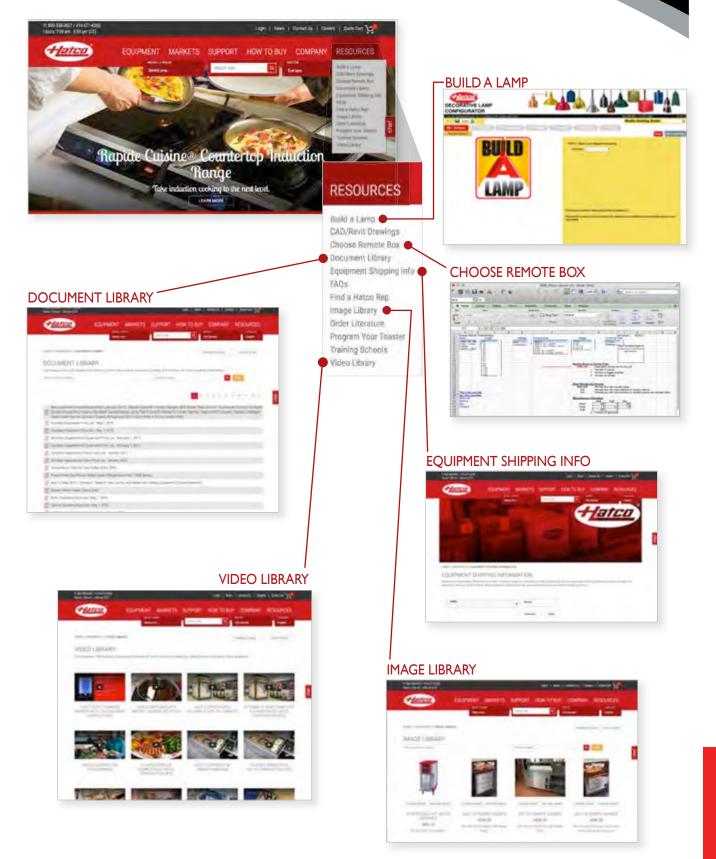



PRODUCT INDEX

INDUCTION	2-3	PORTABLES	35-50
SALAMANDER	4-5	BUILT-INS	51-57
TOASTERS	6-11	DRAWER WARMERS	58-62
DECORATIVE LAMPS & DISPLAY LIGHTS	12-17	MERCHANDISERS	63-76
STRIP HEATERS	19-32	HOLDING & DISPLAY CABINETS	77-86
CARVING STATIONS	33-34	WELLS	87-107

CDW	58
CLED	18
CSBFX	54
CSSBX, CSSBFX	.51-52
CSUX	55
CWBX	91-92
DCS	33
DL	12-17
FDWDE	78
FS2HAC	86
FSD	.79-82
FSDT	.79-82
FSHC-6W	
FSHC-7	85
FTBX	89-90
FTBX	
FTBX GMFFL GMHD, GMHDH	35
GMFFL	35 71
GMFFL	35 71 .49-50
GMFFL	35 71 .49-50 .66-67
GMFFL GMHD, GMHDH GR2BW GR2SDH, GR2SDH-xxD	35 71 .49-50 .66-67 .66-67
GMFFL	35 71 .49-50 .66-67 70
GMFFL	35 71 .49-50 .66-67 70 19
GMFFL	35 71 .49-50 .66-67 70 19 .20-21
GMFFL	35 71 .49-50 .66-67 70 19 .20-21 .22-23
GMFFL	35 71 .49-50 .66-67 70 19 .20-21 .22-23 .24-25
GMFFL	35 71 .49-50 .66-67 70 19 .20-21 .22-23 .24-25 .29-30

GRBW
GRCD, GRCDH
GRCMW
GRCSCL, GRCSCLH
GRFF, GRFFL, GRFFB, GRFFBL35-36
GRFHS 37-38
GRFS 37-38
GRH
GRHD, GRHDH
GRHW
GRS 46-47
GRSDH, GRSDH-xxD
-
GRSDS, GRSDS-xxD 64-65
GRSDS/H 63
GRSR 40
GRSS 43
GRSSB 56
GRSSR 41-42
HBG 44
HBGB 57
HBGBH
HCSBFX
HCSSBX, HCSSBFX
HDW59-62
HDW-xRx
HGSM 45
HWB-xx 100-107

HWB-43100-10)7
HWB-xQT 100-10	
HWBI43 95, 9)7
HWBI, HWBI-S 95-9	9
HWBRN)7
HWBRT)7
HXMH, HXMH-xxD	9
HXMS, HXMS-xxD	
IRNG	
ITQ	
IWB, IWB-S	
LW	
MDW	
PWB. PWC	7
PWB, PWC	
QTS	5
QTS	5 94
QTS	5 4 3
QTS	5 94 93 91
QTS	5 94 93 91 1
QTS	5 4 3 1 8
QTS 9 RCTHW 9 RHW 9 RMBs 3 TK 1 TM TM3	5 4 3 1 1 7
QTS	5 4 3 1 8 7 4
QTS	5 4 3 1 8 7 4 0
QTS 9 RCTHW 9 RHW 9 RMBs 3 TK 1 TM 1 TM3 1 TMS 1 TQ 1 TQ3 NEW	5 4 3 1 8 7 4 9
QTS 9 RCTHW 9 RHW 9 RMBs 3 TK 1 TM 1 TM3 1 TMS 1 TQ 1 TQ3 NEW UGAH, UGAHL 26, 2	5 4 3 1 8 7 4 9 8
QTS 9 RCTHW 9 RHW 9 RMBs 3 TK 1 TM 1 TM3 1 TMS 1 TQ 1 TQ3 NEW	5 4 3 1 8 7 4 9 8 8 8





Paint Chip and Simulated Stone* Sample Colors



Sand

Colors are a representation and may not exactly match our colors. Consult factory for possible color matching options on these colors. Non-standard colors are non-returnable.

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit www.hatcocorp.com / Order Literature / Sales Literature / Sell Sheets.

* Models with Simulated Stone are Swanstone®

Granite

