

TGN-2R-2S

 2/1 GN Upright Foodservice Refrigerator, 2 Full Solid Swing Doors



Dimensions	
External Width (mm)	1460
External Depth (mm)	858
External Height (mm)	2079
Exclusions	Depth does not include 46 mm for door handle or 13 mm for rear access panel.
Net Volume (Litres)	883
Gross Volume (Litres)	1440
Supplied Shelves	6
Shelf Size (L x D mm)	530 x 650
Internal Net Height (mm)	1350
Unpackaged Weight (kg)	259
Packaged Dimensions (W x D x H mm)	2032 x 813 x 2134
Supplied Supports	Ø64 mm castors (83 mm height)

Build	
Door Description	2 Solid Swing Doors
Exterior Construction	Stainless steel front, aluminium sides & rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	standard

Technical	
Temperature Holding	0.5 : 3.3°C
Refrigerant	R290
Voltage / Frequency / Phase	220-240V/50-60Hz/1
Amps	1.4
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Testing Standard	EN 16825
EEC	C
EEl	36.2
kWh/24hr	2.04
kWh/Annum	746
Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)
Europe [+49 \(0\) 7622 6883 0](tel:+490762268830)
Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com

True
REFRIGERATION®

TGN-2R-2S

2/1 GN Upright Foodservice Refrigerator, 2 Full Solid Swing Doors

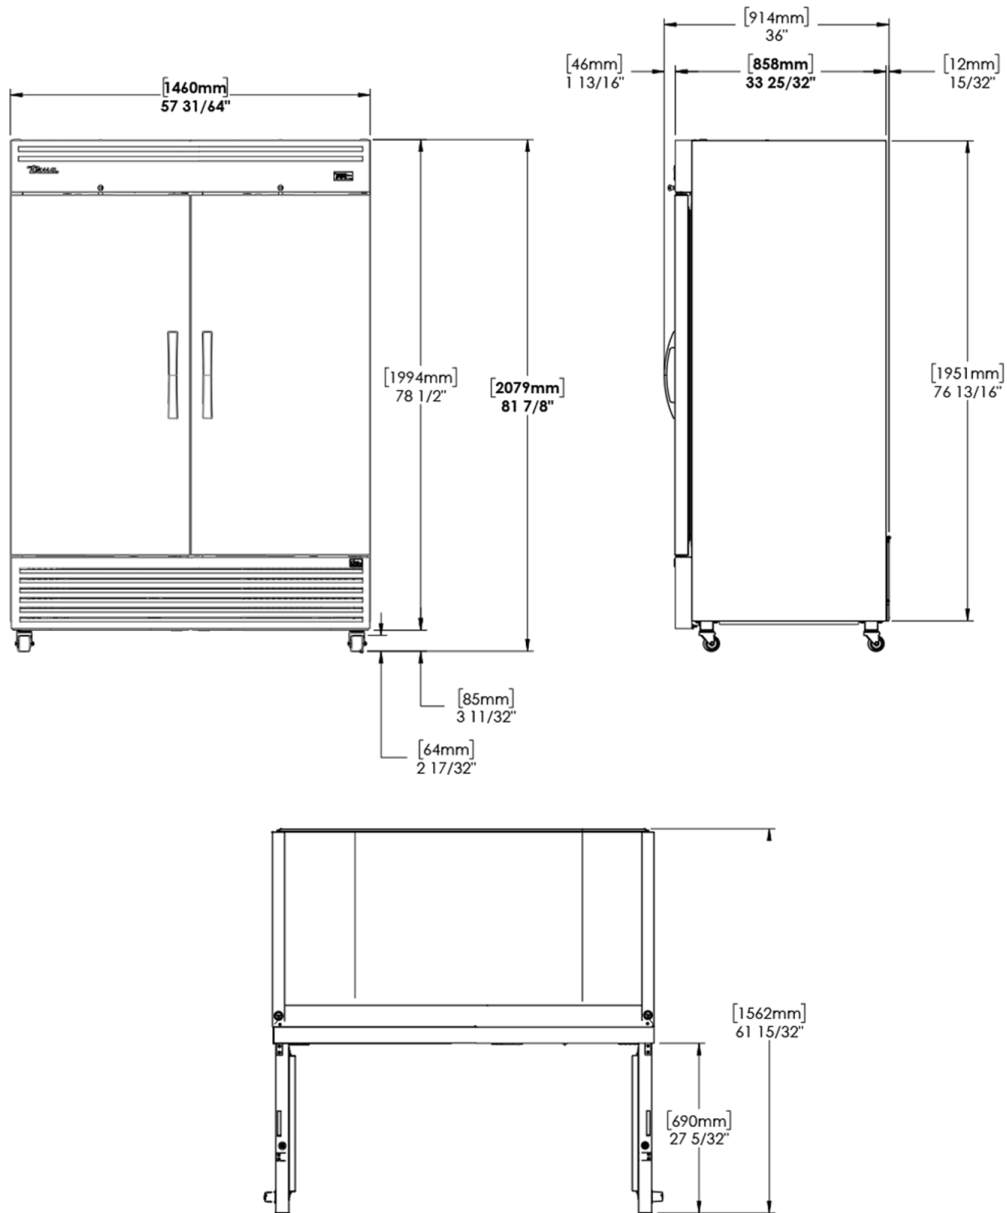

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia

0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com

